


FEATURES

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy



DTC114EM



SOT-723

1. IN
2. GND
3. OUT

MARKING:24
DTC114EUA



SOT-323

1. IN
2. GND
3. OUT

MARKING:24

DTC114ECA



SOT-23

1. IN
2. GND
3. OUT

MARKING:24

DTC114EE



SOT-523

1. IN
2. GND
3. OUT

MARKING:24

DTC114EKA



SOT-23-3L

1. IN
2. GND
3. OUT

MARKING:24

DTC114ESA



TO-92S

1. GND
2. OUT
3. IN

MAXIMUM RATINGS(Ta=25°C unless otherwise noted)







Symbol	Parameter	Limits(DTC114E□)						Unit
		M	E	UA	KA	CA	SA	
V _{CC}	Supply Voltage	50						V
V _{IN}	Input Voltage	-10~+40						V
I _o	Output Current	50						mA
I _{CM}	Peak Collector Current	100						mA
P _D	Power Dissipation	100	150	200			300	mW
T _j	Junction Temperature	150						℃
T _{stg}	Storage Temperature	-55~+150						℃

DTC114EM/DTC114EE/DTC114EUA DTC114EKA /DTC114ECA/DTC114ESA


ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	$V_{I(off)}$	$V_{CC}=5V, I_O=100\mu A$	0.5			V
	$V_{I(on)}$	$V_O=0.3V, I_O=10mA$			3	V
Output voltage	$V_{O(on)}$	$I_O/I_I=10mA/0.5mA$			0.3	V
Input current	I_I	$V_I=5V$			0.88	mA
Output current	$I_{O(off)}$	$V_{CC}=50V, V_I=0$			0.5	μA
DC current gain	G_I	$V_O=5V, I_O=5mA$	30			
Input resistance	R_I		7	10	13	k Ω
Resistance ratio	R_2/R_1		0.8	1	1.2	
Transition frequency	f_T	$V_O=10V, I_O=5mA, f=100MHz$		250		MHz

RATING AND CHARACTERISTIC CURVES (DTC114EM/DTC114EE/DTC114EYA/DTC114EKA/DTC114ECA/DTC114ESA)

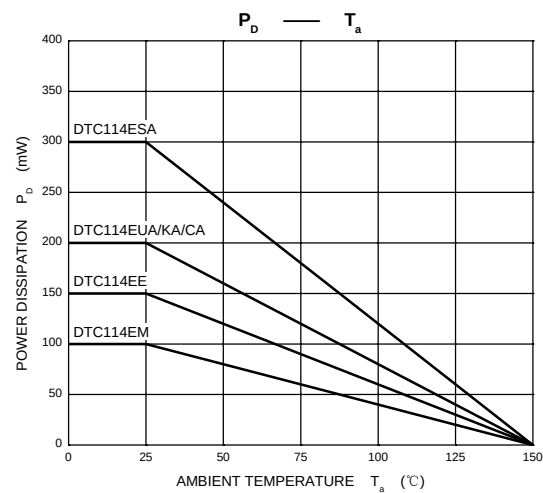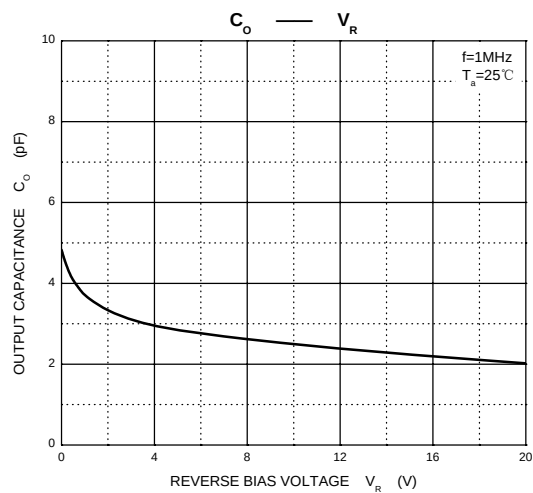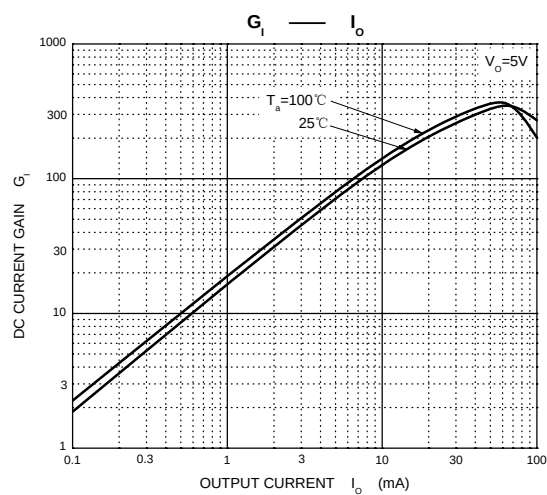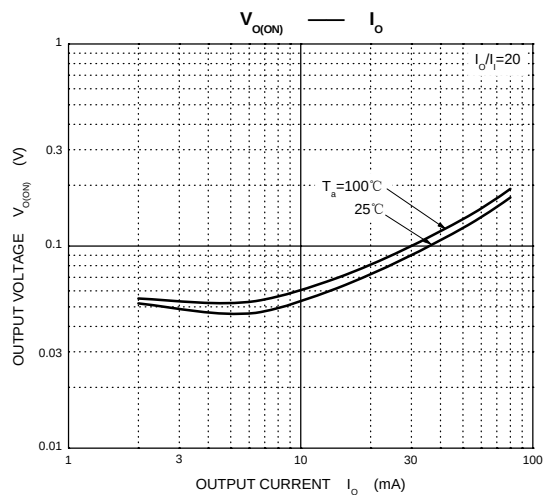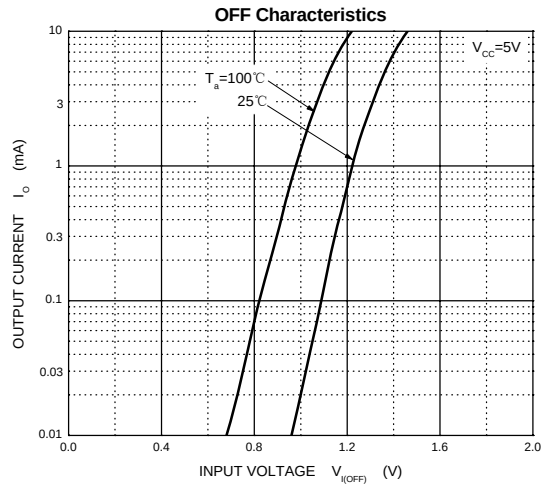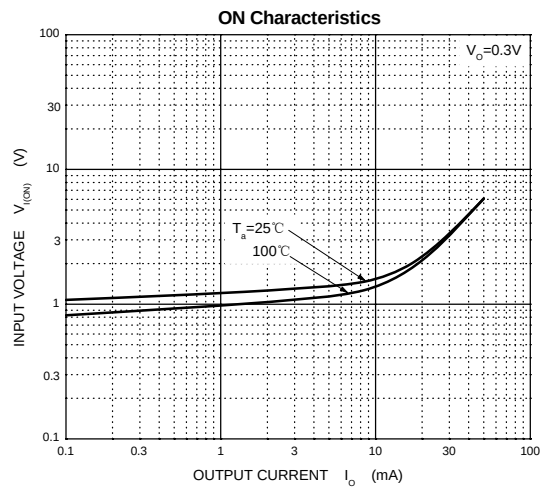


SOT-723 Package Outline Dimensions

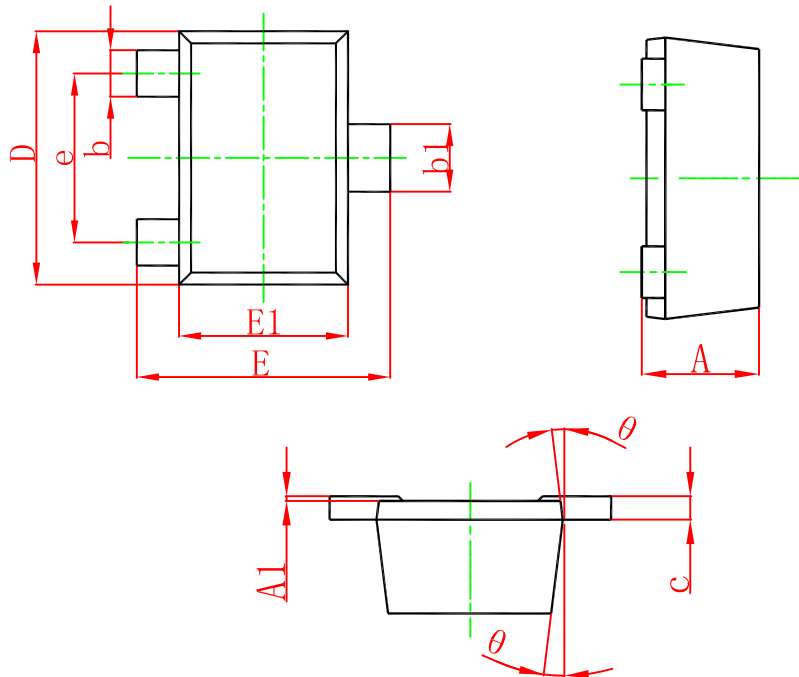



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.430	0.500	0.017	0.020
A1	0.000	0.050	0.000	0.002
b	0.170	0.270	0.007	0.011
b1	0.270	0.370	0.011	0.015
c	0.080	0.150	0.003	0.006
D	1.150	1.250	0.045	0.049
E	1.150	1.250	0.045	0.049
E1	0.750	0.850	0.030	0.033
e	0.800TYP.		0.031TYP.	
θ	7° REF.		7° REF.	

SOT-523

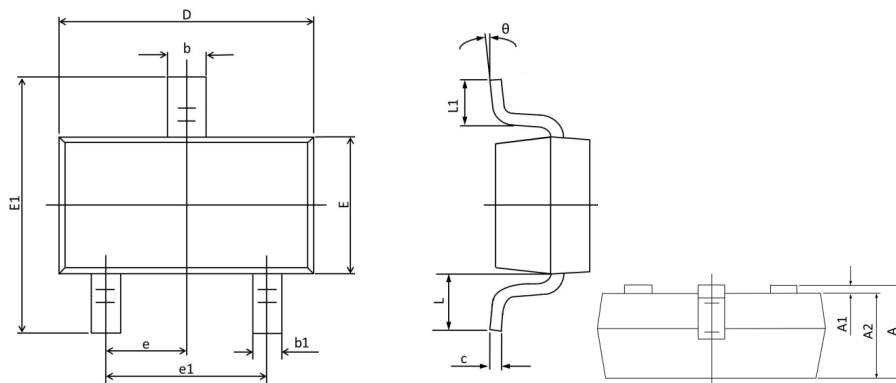

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	0.900	0.700	0.035	0.028
A1	0.100	0.000	0.004	0.000
A2	0.800	0.700	0.031	0.028
b	0.350	0.250	0.014	0.010
b1	0.250	0.150	0.010	0.006
c	0.200	0.100	0.008	0.004
D	1.750	1.500	0.069	0.059
E	0.900	0.700	0.035	0.028
E1	1.750	1.400	0.069	0.055
e	0.5TYP.		0.02TYP.	
e1	1.100	0.900	0.043	0.035
L	0.460	0.300	0.018	0.012
L1	0.460	0.260	0.018	0.010
θ	8°	0°	8°	0°


SOT-323

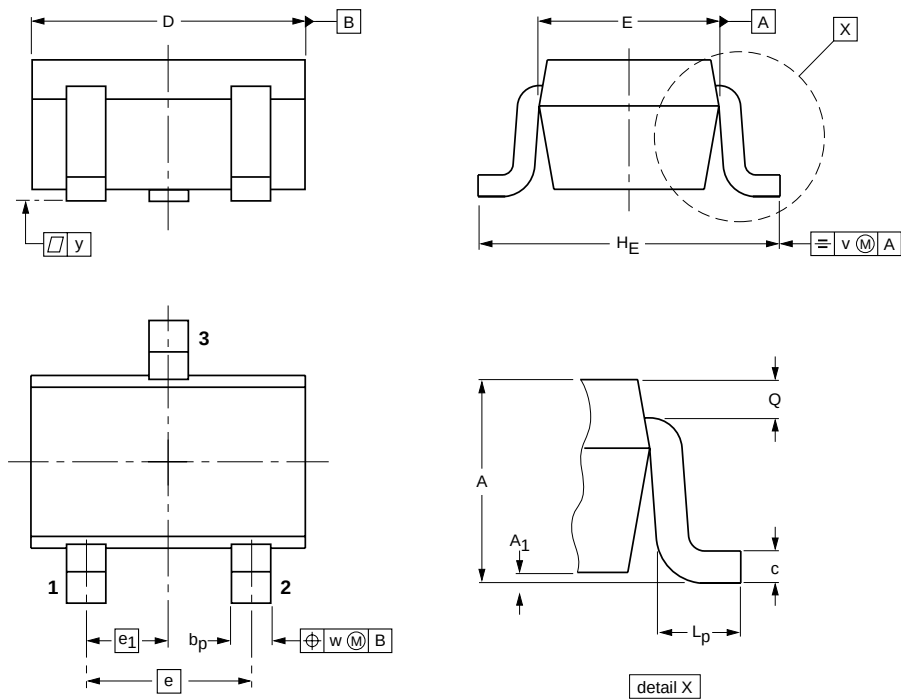


DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁ max	b _p	c	D	E	e	e ₁	H _E	L _p	Q	v	w
mm	1.1 0.8	0.1	0.4 0.3	0.25 0.10	2.2 1.8	1.35 1.15	1.3	0.65	2.2 2.0	0.45 0.15	0.23 0.13	0.2	0.2

SOT23-3L

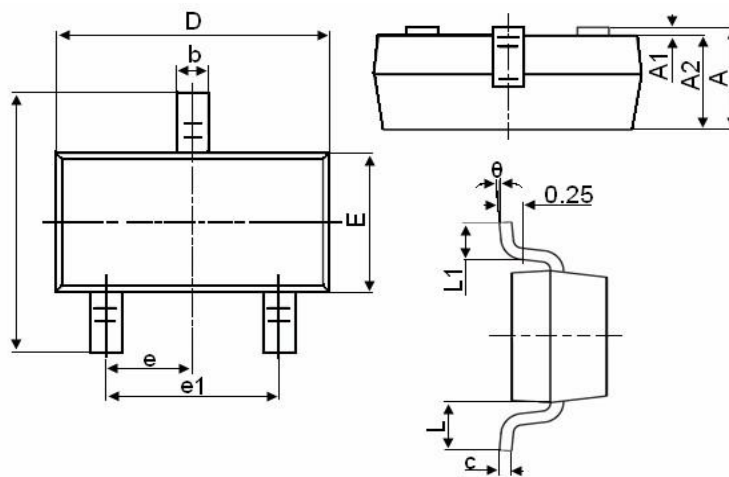


Symbol	Dimensions in Millimeters	
	MIN.	MAX.
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.300	0.500
c	0.100	0.200
D	2.800	3.000
E	1.500	1.700
E1	2.650	2.950
e	0.950TYP	
e1	1.800	2.000
L	0.550REF	
L1	0.300	0.600
θ	0°	8°

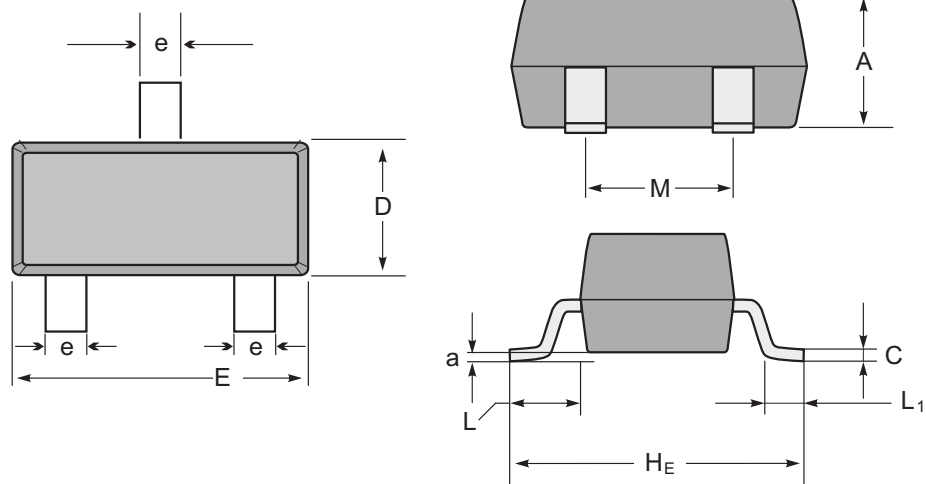

SOT-23 mechanical data

UNIT		A	C	D	E	H _E	e	M	L	L ₁	a
mm	max	1.1	0.15	1.4	3.0	2.6	0.5	1.95	0.55 (ref)	0.36 (ref)	0.0
	min	0.9	0.08	1.2	2.8	2.2	0.3	1.7			0.15
mil	max	43	6	55	118	102	20	77	22 (ref)	14 (ref)	0.0
	min	35	3	47	110	87	12	67			6

TO-92

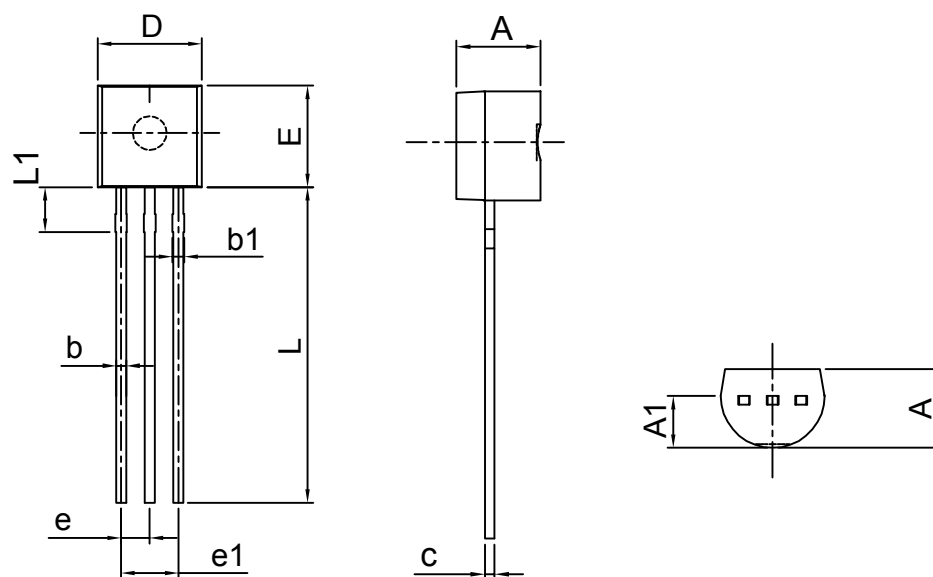

SYMBOL	MIN.	TYP	MAX.
A	3.30	3.50	3.70
A1	2.30	2.60	2.90
b	0.40	0.45	0.50
b1	0.50	0.60	0.70
c	0.28	0.38	0.48
D	4.50	4.60	4.70
E	4.40	4.60	4.80
e	1.24	1.27	1.30
e1	2.44	2.54	2.64
L	13.50	14.00	14.50
L1	1.80	2.00	2.20

Dimensions in inches and (millimeters)