

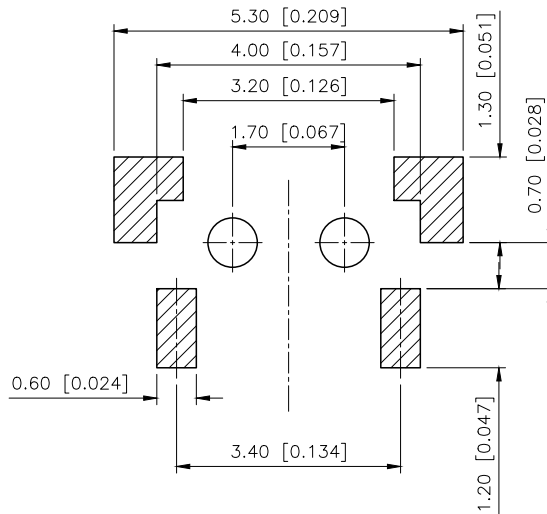
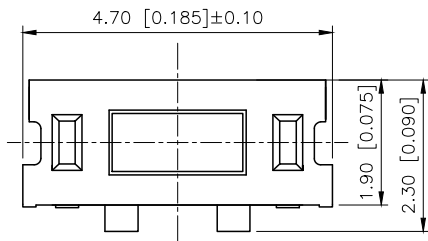
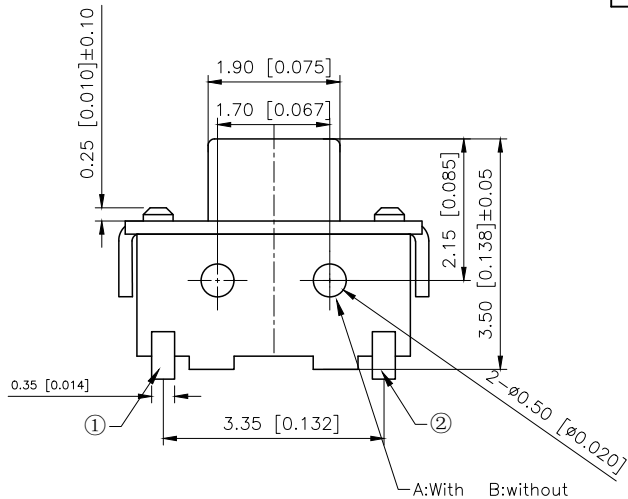


| REVISIONS |         |          |                 |            |        |
|-----------|---------|----------|-----------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION     | DATE       | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE | /          | /      |
| A1        | N/A     |          | 图面升级整理图面        | 2025.05.28 | 阿树     |

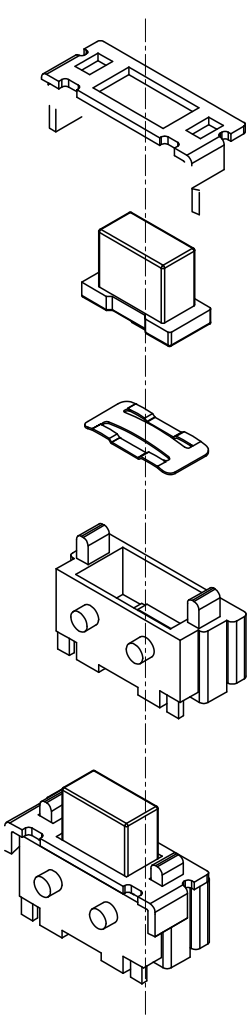

SPECIFICATION  
Contact Rating: 50mA,12V DC  
Contact Resistance: 100mΩ max  
Insulation Resistance: 100MΩ min.500V DC  
Dielectric Strength: 250V AC/1minute  
Travel: 0.15mm  
Operating Temp: -30℃~+85℃  
Storage Temp: -30℃~+80℃

|                 |                         |
|-----------------|-------------------------|
| PAPT NO         | TS-1010-X-X             |
| Operating Force | A:100gf B:160gf C:260gf |
| Height          | H:3.5                   |
| Position Foot   | A:With B:without        |

|      |           |     |               |                   |
|------|-----------|-----|---------------|-------------------|
| ⑤    | Terminal  | 2   | Brass (0.30t) | Plating silvering |
| ④    | Contact   | 1   | F.ag/SUS      | Natural           |
| ③    | Base      | 1   | LCP           |                   |
| ②    | Cover     | 1   | Brass         | Plating Nickel    |
| ①    | Keystake  | 1   | Pa46          |                   |
| ITEM | PAPT NAMF | QTY | MATERIAL      | FINISHING         |

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERAUCES |       |



|          |    |             |                         |
|----------|----|-------------|-------------------------|
| DESIGN   | 阿树 | VIEW:       | MODEL TYPE: TACT SWITCH |
| CHECKED  |    | UNIT: mm/in | PART NO.: TS-1010-X-X   |
| APPROVED |    | SIZE: A4    | DWG NO.:                |