

10134160-YXXLF


NOTES

2- MATERIAL
2- CHRYSOCAL
3- CUPRONICKEL (High current version)

3- APPLICABLE AWG
1- AWG #16-20 : INSULATOR DIAMETER 2.
2- AWG #20-24 : INSULATOR DIAMETER 1.
3- AWG #26-30 : INSULATOR DIAMETER 1.


4- LUBRICANT :
0- NONE

5-PRODUCT SPECIFICATION : GS-12-1374



spec ref		-		dr		2017/07/11		projection		mm		size		scale	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		J Dailbard		2018/02/13				A3		10:1	
ISO 406				chr		J Dailbard		2018/02/13				ecn no		ELX-F-29367-1	
ISO 1101				appr		Aymeric Souday		2018/02/13		product family		-		Released	
surface		- 		linear		0.X		±0.4		RECEPTACLE CRIMP TERMINAL		10134160		rev	
						0.XX		±0.30							
						0.XXX		±-							
ISO 1302		angular		0°		±2°		±2°		cat. no.		-		Product - Customer Drw	
						Amphenol FCI		MINITEK POWER 3.0		dwg no		10134160		sheet 1 of 2	

SECTION B - B
(AWG #20-24)

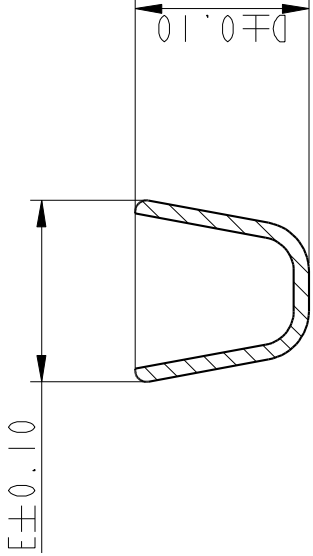

SECTION A - A
(AWG #20-24)

	RECEPTACLE CRIMP TERMINAL						dwg no.	10134160	rev
-	MINITEK POWER 3.0								B
cat. no.									sheet 2 of 2
							Product - Customer Drw		