




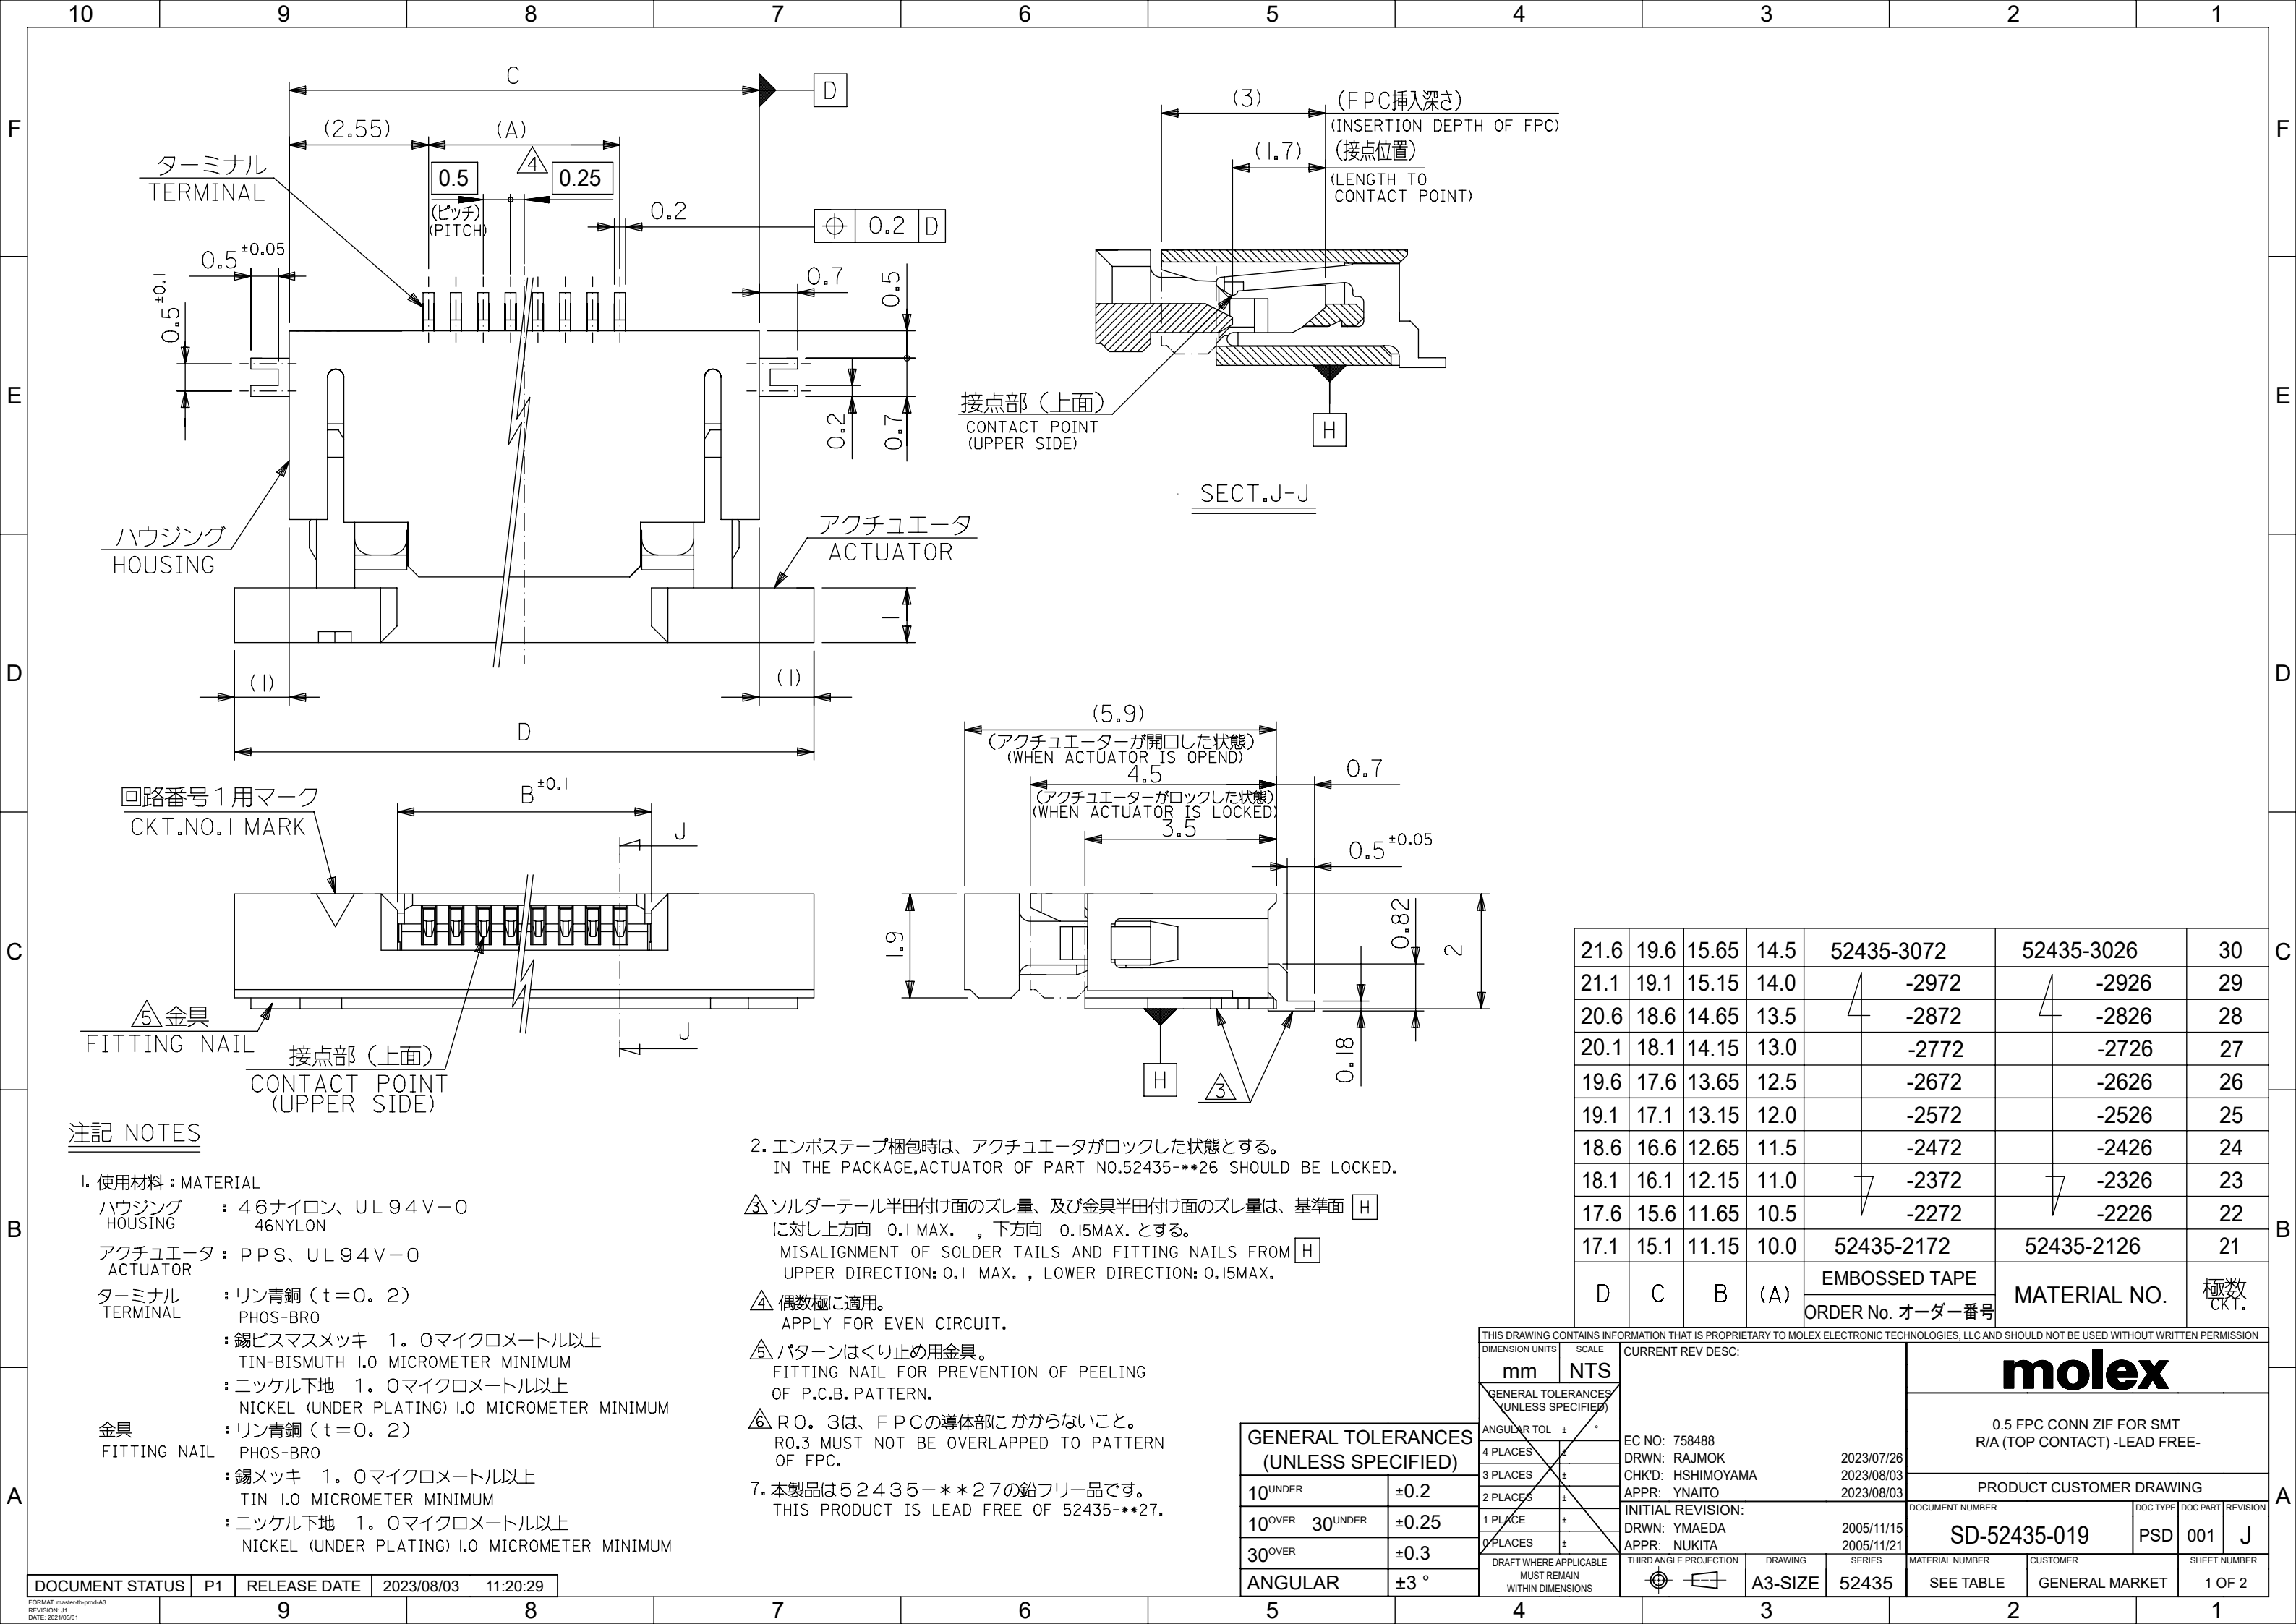


A

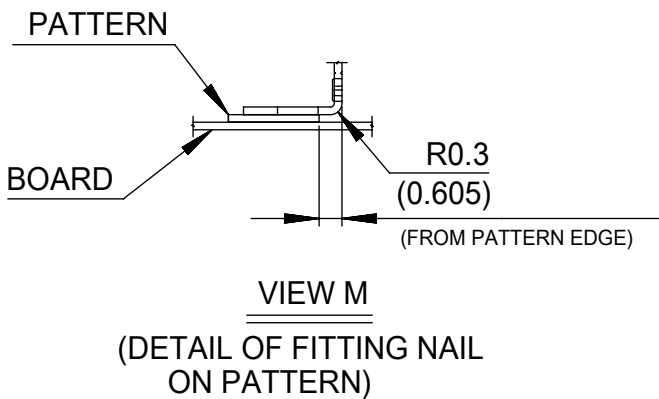

B

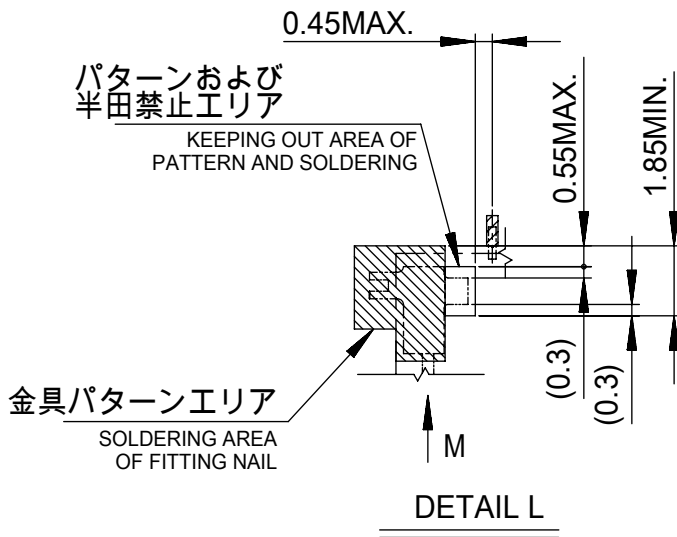


C

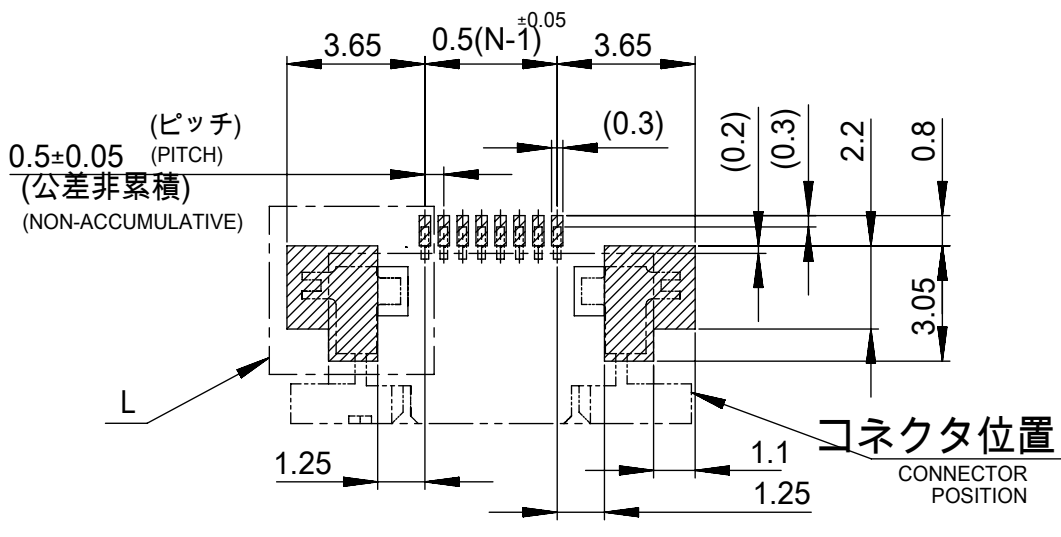


参考基板レイアウト (マウント面)

RECOMMENDED P.C.BOARD
PATTERN DIMENSION (REF.)
(MOUNTING SIDE)

適合FPC推奨寸法
APPLICABLE FPC
RECOMMENDED DIMENSION.
(仕上がり厚さ: 0.3 $\pm$ 0.05)
(THICKNESS: 0.3 $\pm$ 0.05)

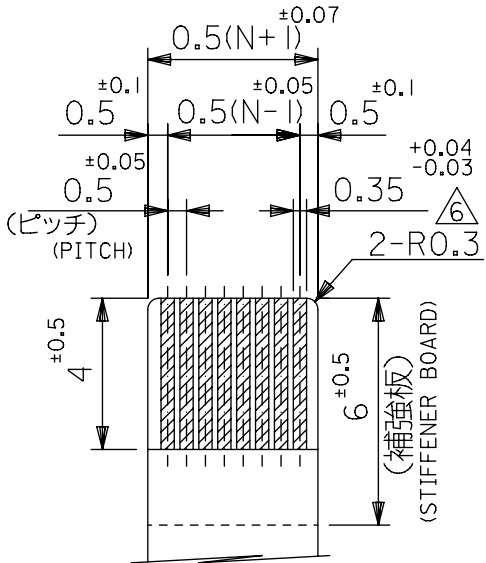

適合FFC推奨寸法
APPLICABLE FFC
RECOMMENDED DIMENSION.
(仕上がり厚さ: 0.3 $\pm$ 0.05)
(THICKNESS: 0.3 $\pm$ 0.05)

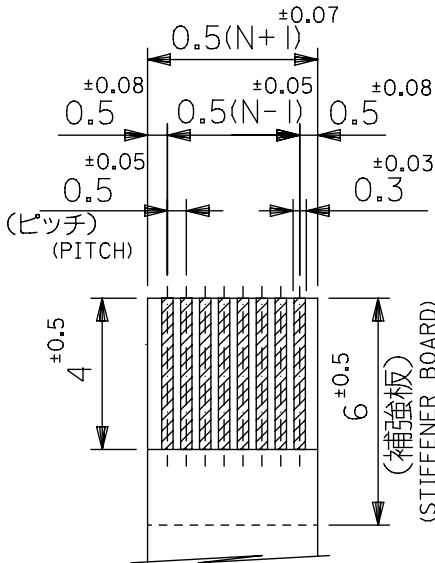


FPC構成推奨仕様

RECOMMENDED STRUCTURE OF FPC


FPCについて:
打抜き方向は導体側から補強板側を推奨致します。
補強フィルム材質はポリイミドを推奨致します。
接着剤は熱硬化接着剤を推奨致します。

ABOUT FPC:
RECOMMENDED PUNCHER DIRECTION : FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.
RECOMMENDED MATERIAL :
STIFFENER FILM : POLYIMIDE
BONDING AGENT : THERMOSETTING BONDING AGENT

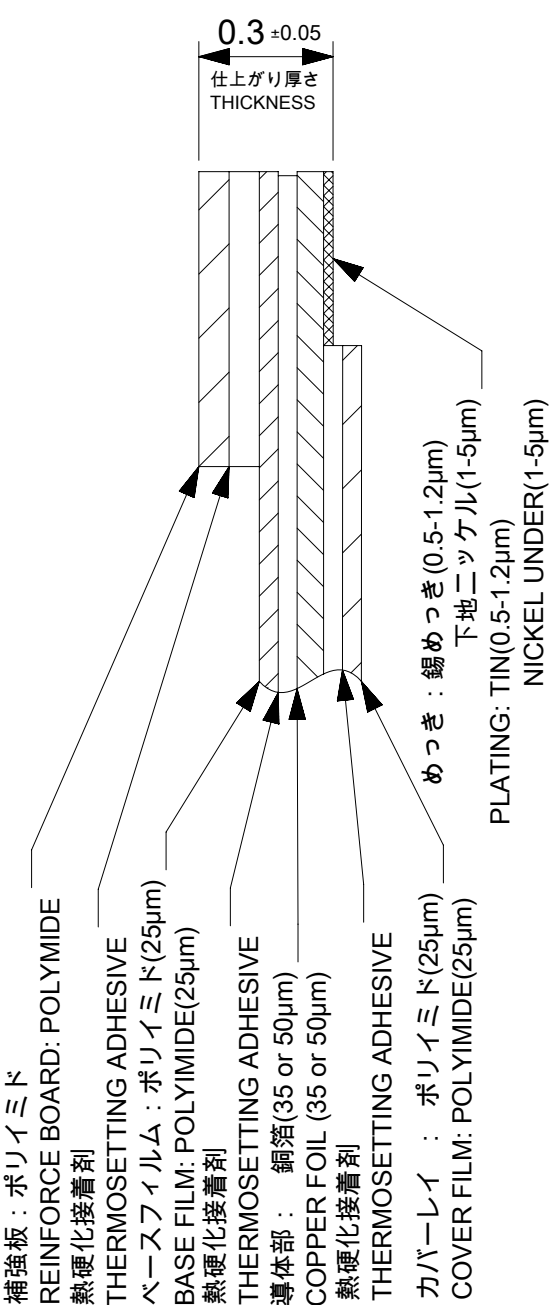

FFC構成推奨仕様

RECOMMENDED STRUCTURE OF FFC

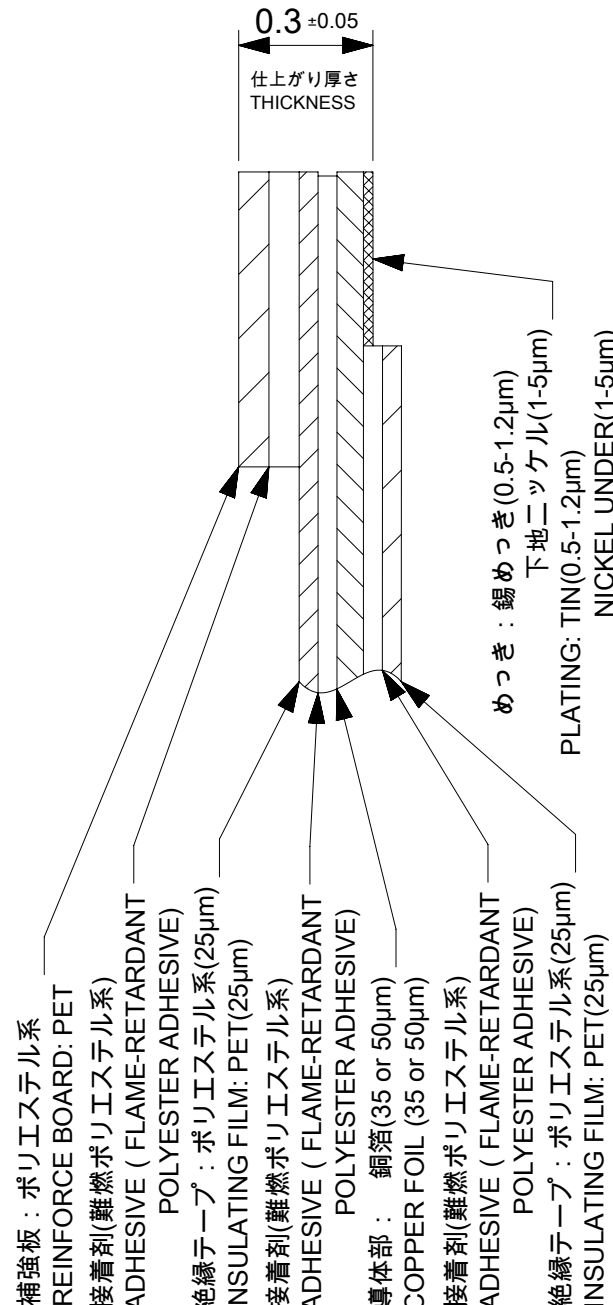

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC:							
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±				molex 0.5 FPC CONN ZIF FOR SMT R/A (TOP CONTACT) -LEAD FREE- PRODUCT CUSTOMER DRAWING							
				DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
				SD-52435-019		PSD		001		J	
				MATERIAL NUMBER		CUSTOMER				SHEET NUMBER	
				SEE SHEET-1		GENERAL MARKET				2 OF 2	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES	
				A3-SIZE		52435					

A


B

C

D

E

F

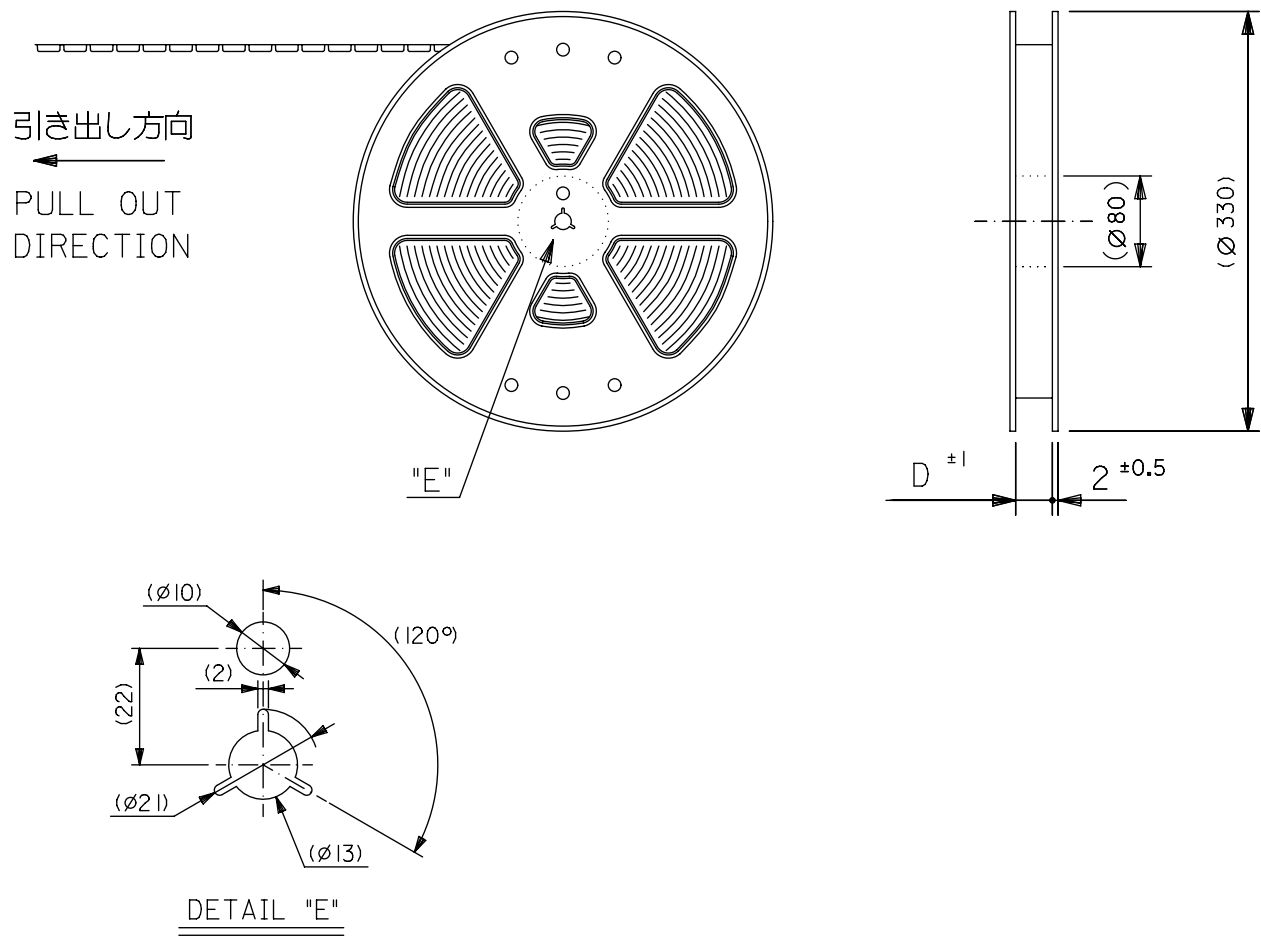


5. 材料 (MATERIAL)
- キャリアテープ (CARRIER TAPE) : ポリプロピレン (POLYPROPYLENE)
- トップテープ (TOPTAPE) : PET, PE, PEF
- リール (REEL) : ポリスチレン (PS) <リサイクル材を含む>
- POLYSTYREN (PS) <RECYCLE MATERIAL CONTAINED>

6. 本製品は52435-**-91の鉛フリー品です。
- THIS PRODUCT IS LEAD FREE OF 52435-**-91.


注記 NOTES

1. 製品番号 52435-**-26 の梱包状態はアクチュエータがロックした状態とする。
詳細寸法については図面 SD-52435- 019 を参照下さい。
IN THE PACKAGE, ACTUATOR OF PART NO.52435-**-26 SHOULD BE LOCKED
RE DETAILED DIMENSIONS, SEE SD-52435- 019
2. 梱包数量 : 1000個/リール
NUMBER OF CONNECTORS: 1000PCS/REEL
3. リードテープ長さ LEAD TAPE LENGTH

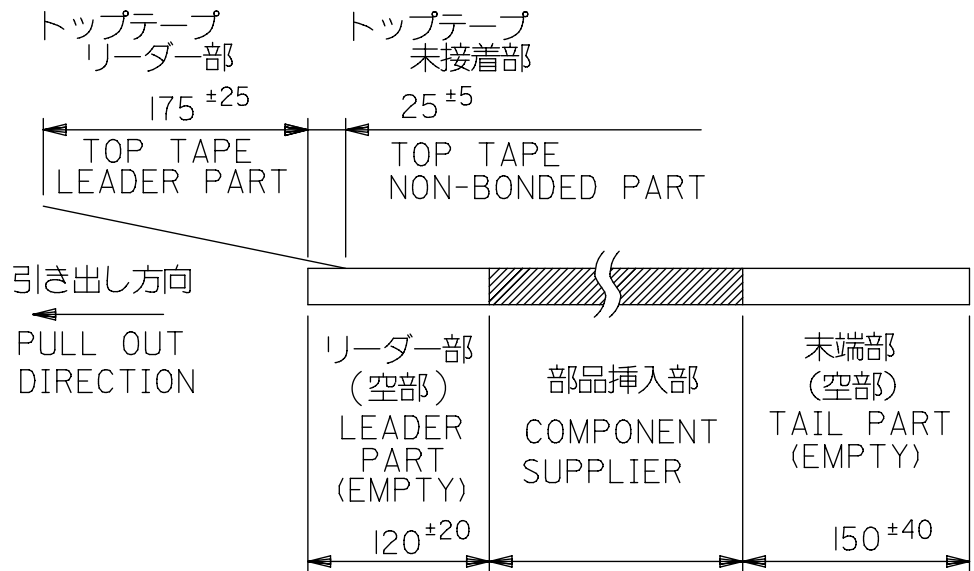

4. トップテープの剥離強度 : (剥離方向は下図参照)
- 0.1N ~ 1.3N (10gf ~ 130gf) 尚、本規格値は、出荷時に適用。
(但し、輸送時に剥離が発生しない事。)

PEELING OFF FORCE OF TOP TAPE
0.1N ~ 1.3N (10gf ~ 130gf) (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT
PEEL OFF SHOULD NOT BE ALLOWED,
DURING TRANSPORTATION

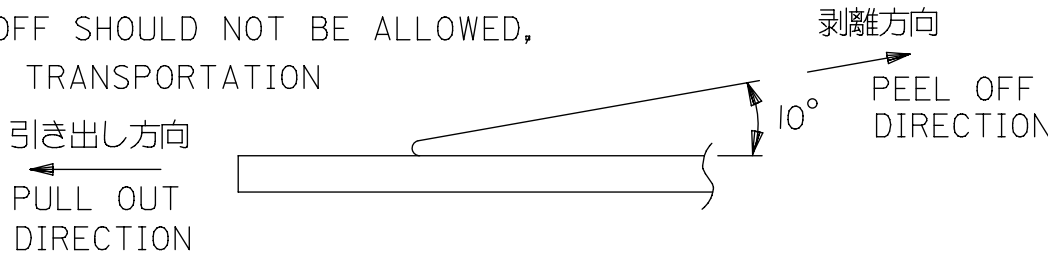

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex					
mm	NTS												
GENERAL TOLERANCES (UNLESS SPECIFIED)								EC NO: 719890 DRWN: NARENC CHK'D: SMARUYAMA APPR: YNAITO INITIAL REVISION: DRWN: YMAEDA APPR: NUKITA					
ANGULAR TOL		±	3.0 °										
4 PLACES		±											
3 PLACES		±											
2 PLACES		±											
1 PLACE		±											
0 PLACES		±											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER	
						A3-SIZE		52435		SEE TABLE		GENERAL MARKET	
GENERAL TOLERANCES (UNLESS SPECIFIED)													
10 ^{UNDER}		±0.2								DOCUMENT NUMBER		DOC TYPE	
10 ^{OVER} 30 ^{UNDER}		±0.25								SD-52435-020		PSD	
30 ^{OVER}		±0.3										DOC PART	
ANGULAR		±3 °										REVISION	
												E	
												SHEET NUMBER	
												1 OF 3	

