
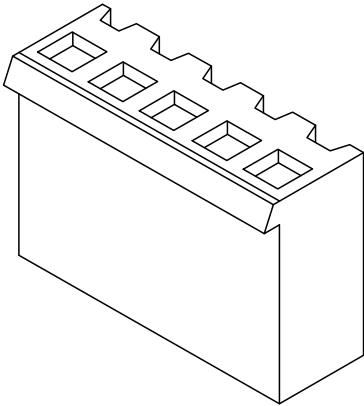
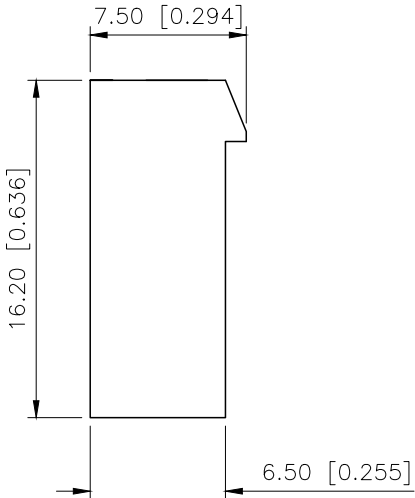
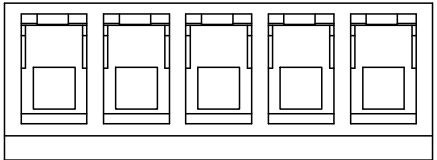
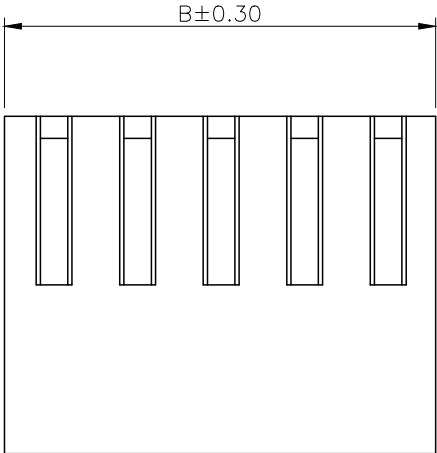


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.08.29	阿树

Circuit 1

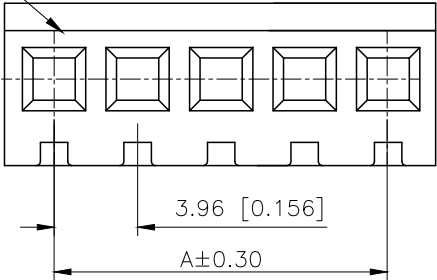

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:7A AC/DC
 - Withstanding Voltage:1500V AC/minute
 - Temperature range:−40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing:≤20mΩ

PART NO.:

X8672 H-XX N2 XX
① ② ③ ④ ⑤

- ①Series No
②Category:H-HSG
③Row No.Pin No:XX-02~20Pin
④Material:N2-PA66 94V-2
⑤Color:Blank-Natural Color

Poles	Dimensions/mm		Poles	Dimensions/mm	
	A	B		A	B
02	3.96	8.62	12	43.56	48.23
03	7.92	12.59	13	47.52	52.19
04	11.88	16.55	14	51.48	56.15
05	15.84	20.51	15	55.44	60.11
06	19.80	24.47	16	59.40	64.07
07	23.76	28.43	17	63.36	68.03
08	27.72	32.39	18	67.32	71.99
09	31.68	36.35	19	71.28	75.95
10	35.64	40.31	20	75.24	79.91
11	39.60	44.27			

X8672H-XX-N2	Nylon 66 UL 94V-2	X8672T	X8672W
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE:	3.96mm Crimp Style Connectors
PART NO.:	X8672H-XX-N2
DWG NO.:	