

MATERIALS AND FINISHES:

SMA JACK RP BULKHEAD IP68 CONNECTOR:

BODY, CRIMP TUBE, JAM NUT: BRASS
PLATED GOLD

CENTER CONTACT: BERYLLIUM COPPER
PLATED GOLD

INSULATOR: PTFE

LOCK WASHER: PHOSPHOR BRONZE
PLATED GOLD

GASKET: SILICONE RUBBER

PERFORMANCE REQUIREMENTS

FREQUENCY RANGE: 0~6GHz




IMPEDANCE: 50 Ω

WITHSTAND VOLTAGE(AC): 350V @0.5mA

CONTINUITY: 100% TEST

PANEL LEAKAGE: IP68

PACKAGING BY PLASTIC BAG

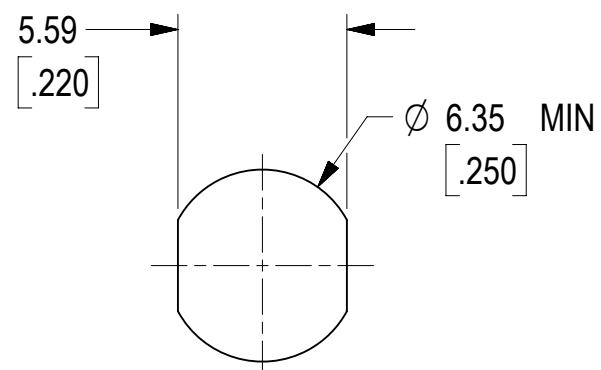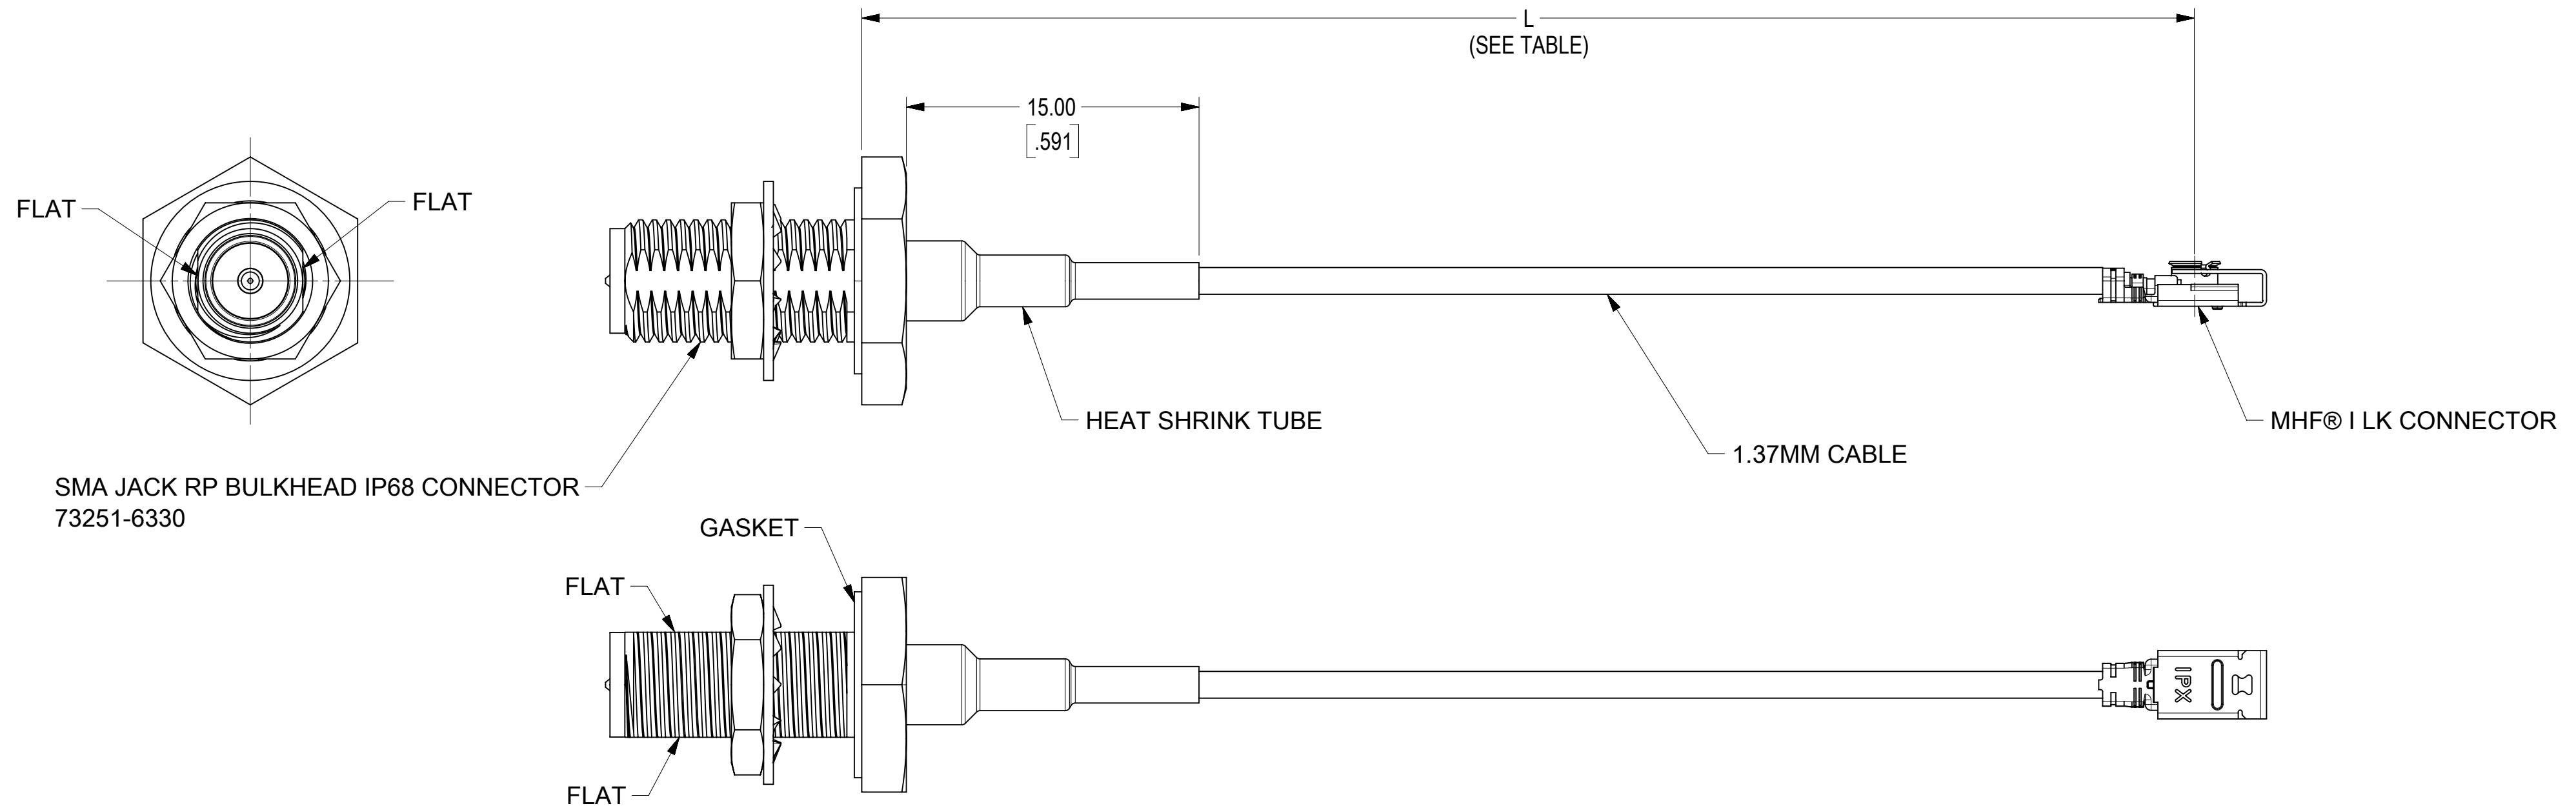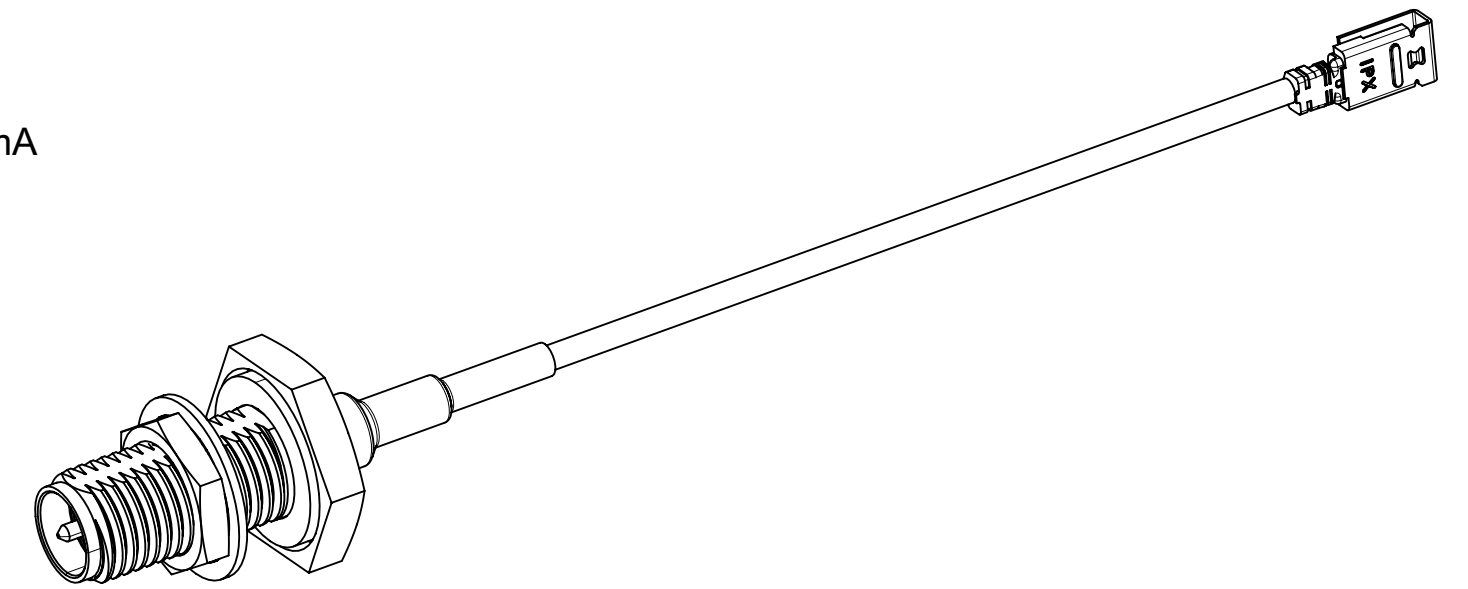

RECOMMENDED MOUNTING HOLE

73230-6145	2.000±.118	50.80±3.00
73230-6144	4.000±.197	101.60±5.00
73230-6143	6.000±.197	152.40±5.00
73230-6142	8.000±.197	203.20±5.00
73230-6141	10.000±.197	254.00±5.00
73230-6140	12.008±.197	305.00±5.00
PART NO.	IN	MM
	L	

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
= 0 = 0 = 0	DIMENSION UNITS	SCALE	CURRENT REV DESC: ADD NEW PN.73230-6141,-6142,-6143,-6144,-6145 PER EWR#: 15301-D.				molex							
	MM/INCH	4:1												
	GENERAL TOLERANCES (UNLESS SPECIFIED)						EC NO: 756278 DRWN: YHUANG112023/07/07 CHK'D: JCHEN1082023/07/12 APPR: LCHEN032023/07/13 INITIAL REVISION: DRWN: YHUANG112022/07/19 APPR: LCHEN032022/11/04				CA,SMA JACK RP BULKHEAD IP68 TO MHF®I LK WITH DIA 1.37MM CABLE,50 OHMS,EWR#: 15301-A			
ANGULAR TOL ± °														
4 PLACES	±	PRODUCT CUSTOMER DRAWING												
3 PLACES	±					DOCUMENT NUMBER					DOC TYPE	DOC PART	REVISION	
2 PLACES	±													
1 PLACE	±					732306140		PSD	000	A2				
0 PLACES	±													
DIVISIONAL SYMBOLS	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER		SHEET NUMBER					
				C-SIZE	73230	SEE TABLE	GENERAL MARKET		1 OF 1					