

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH — BASIC

CATALOG LISTING

V7-5D17E9



CW-C4575

CATALOG LISTING
V7-5D17E9
PAGE 1 OF 1
RELEASE NO. PR-22719
REPLACES
CHECK
ISSUE
4

REVISIONS

A	REL	PR22719
	DCS	10 APR 97
B	CO-	93311
	TSM	26 OCT 98
C	0005782	
	RJ	04 JUN 04

CHECK
04 JUN 04
AK
CHECK
10 APR 97
DCS
FORMTEK
DRAWN

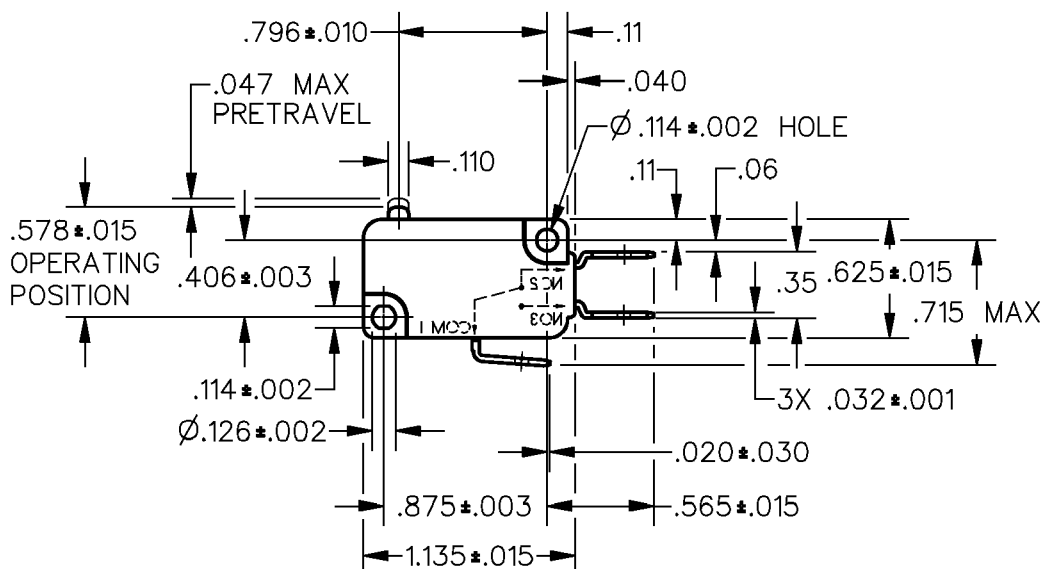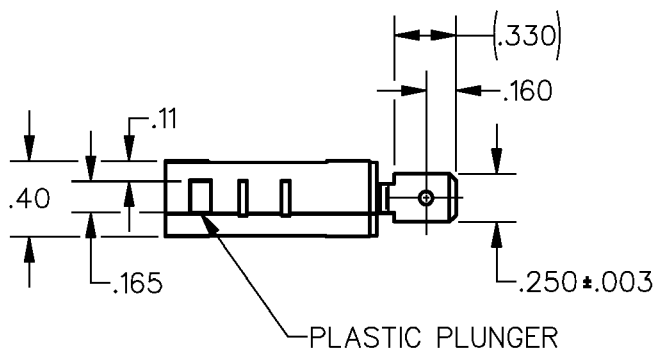


NOTES

- 1 — IN INSPECTION, DO NOT BURN OUT — GOLD CONTACTS
- 2 — IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD
- 3 — INSPECT SWITCH RESISTANCE PER CONTROL PLAN

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 15 GRAMS MAX	CONTACT ARRANGEMENT	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
DIFFERENTIAL TRAVEL — — — .002-.010	S P D T		
OVERTRAVEL — — — — — .050 MIN	L22 1A 125 VAC	ONE PLACE (.0)	±.030
FREE POSITION — — — — — .625 MAX		TWO PLACE (.00)	±.015
RELEASE TRAVEL — — — — — .010 MIN		THREE PLACE (.000)	±.005
		ANGLES	±
		WEIGHT	

