



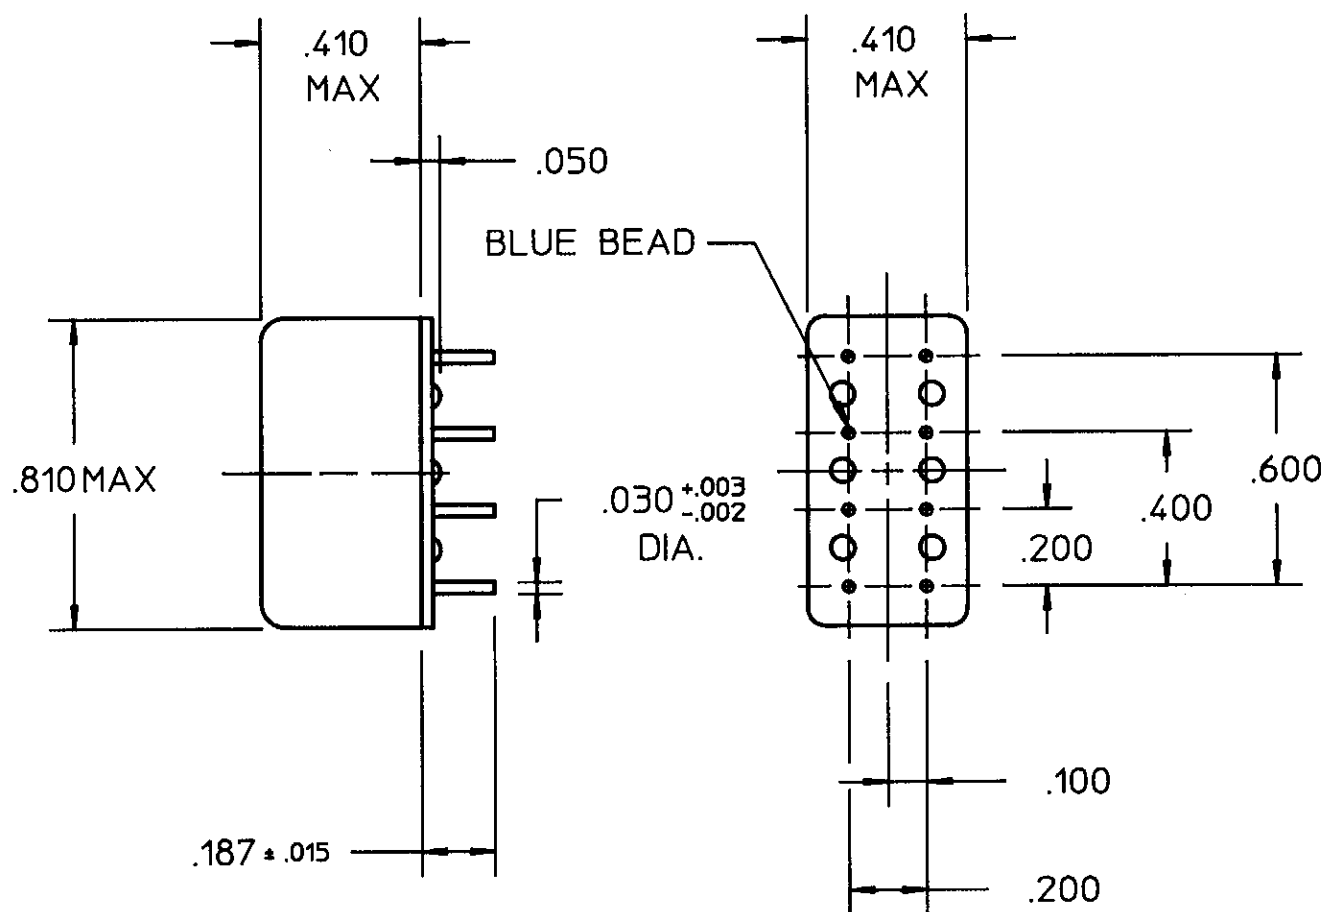

COIL: @ +25 °C
 RESISTANCE 870 OHMS $\pm$ 10%
 NOMINAL VOLTAGE 24.0 VDC
 MUST OPERATE 17.5 VDC
 MUST RELEASE 1.4 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 500 CPS @ 10 g's
 SHOCK 30 g's 6 MS. DURATION
 TEMPERATURE -55 °C TO +85 °C
 NOTES: 352 MILLIWATTS OPERATE SENSITIVITY

CUSTOMER DATA SHEET

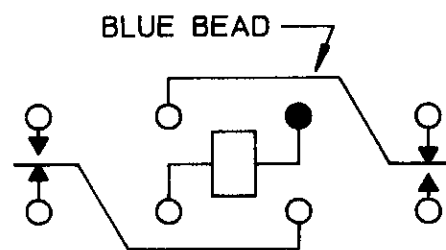

DR. R.B. 10/16/91 CK. 10/16/91 JMB

**COMMUNICATIONS
 INSTRUMENTS, INC.**

CUST. EQUIVALENT TO HI-G
 CUST. NO. FS2-2A-124P

TYPE "HFW" RELAY

HFW1201X201