

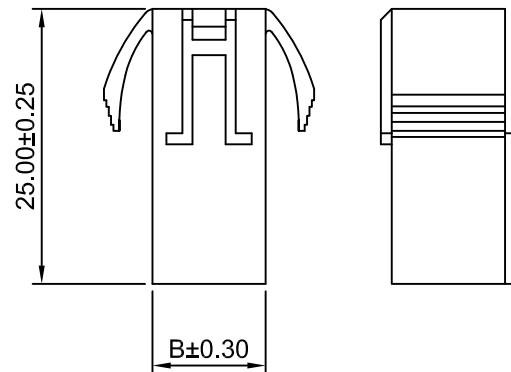
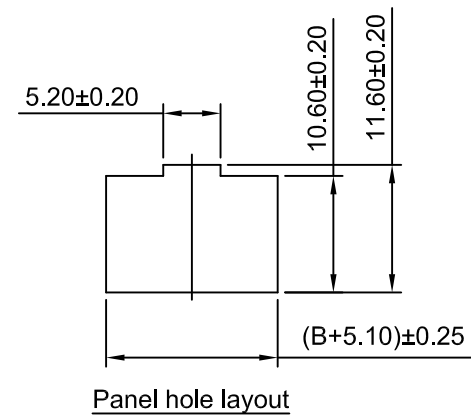
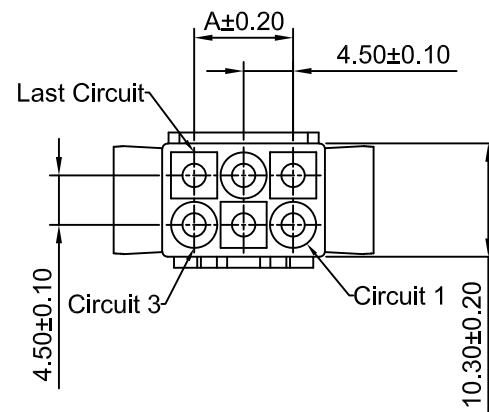


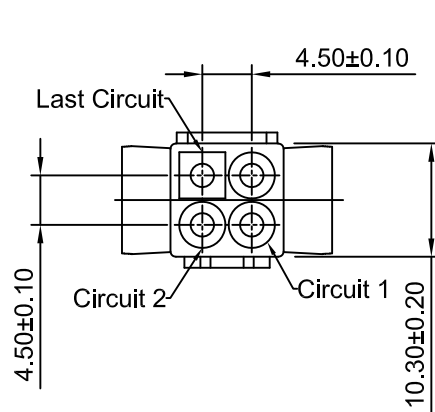

2x2P

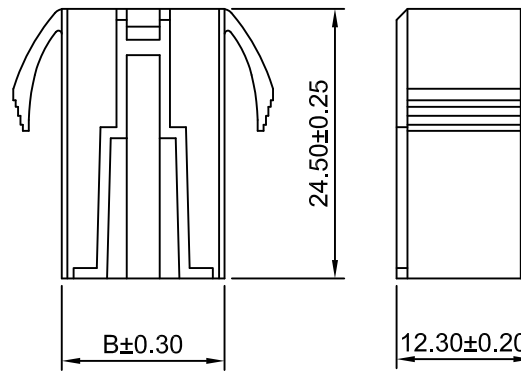

2x3P

SPECIFICATIONS:

Current Rating: 10A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 7mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
C1301HM-2x2P	4.50	10.40	C1301HM-2x3P	9.00	15.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 4.50mm Pitch Housing	
mm		1.5:1		1 of 1			
DRWN		CHK'D		APPR			
Wenmin Luo		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
0							
DRAWING NO.				C1301HM-2xXP		REV A0	
REV				DESCRIPTION			
DATE							