

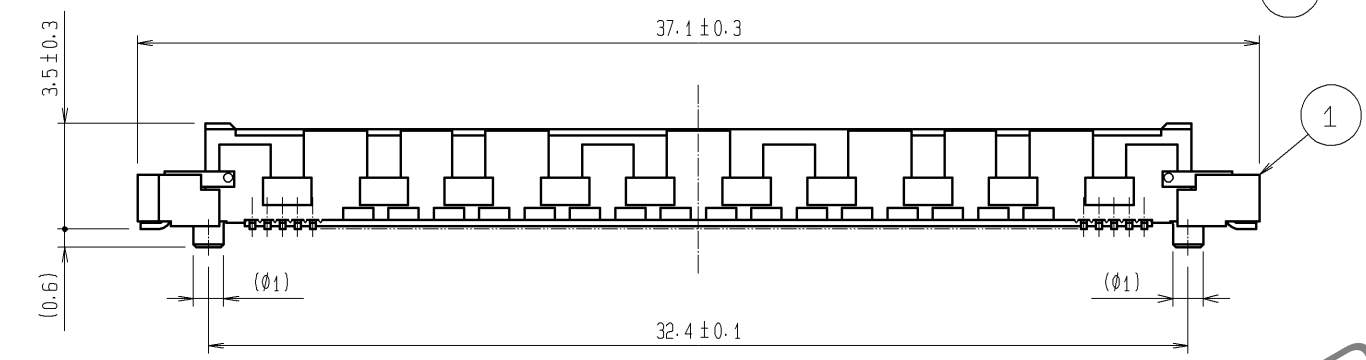
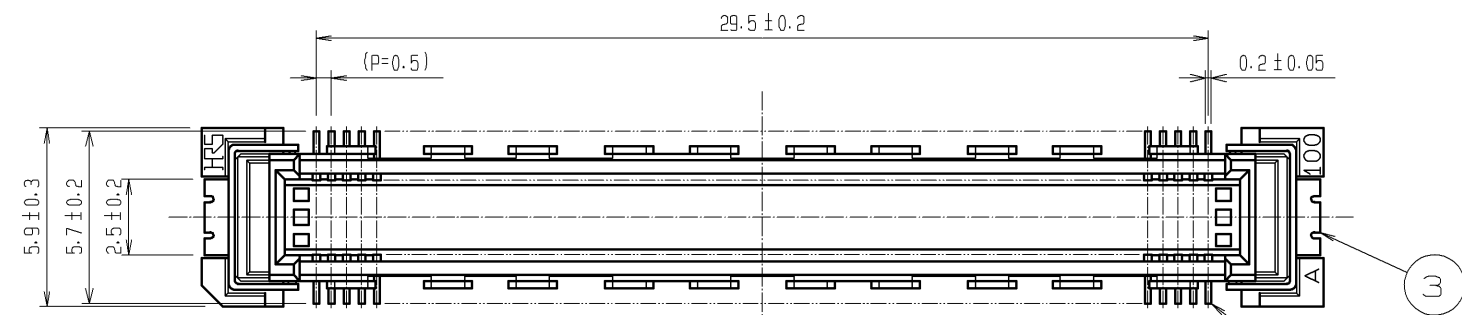



Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

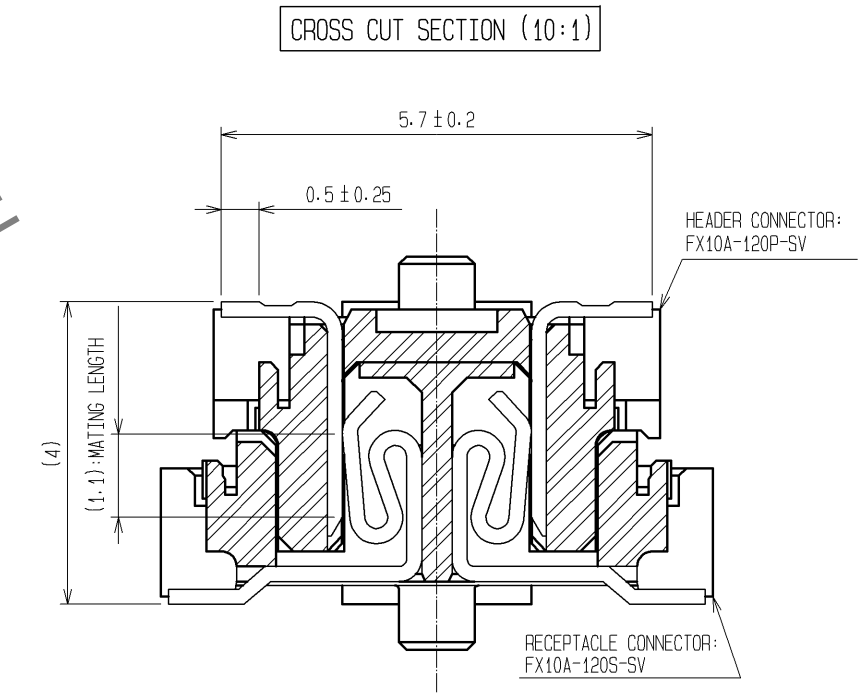

RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

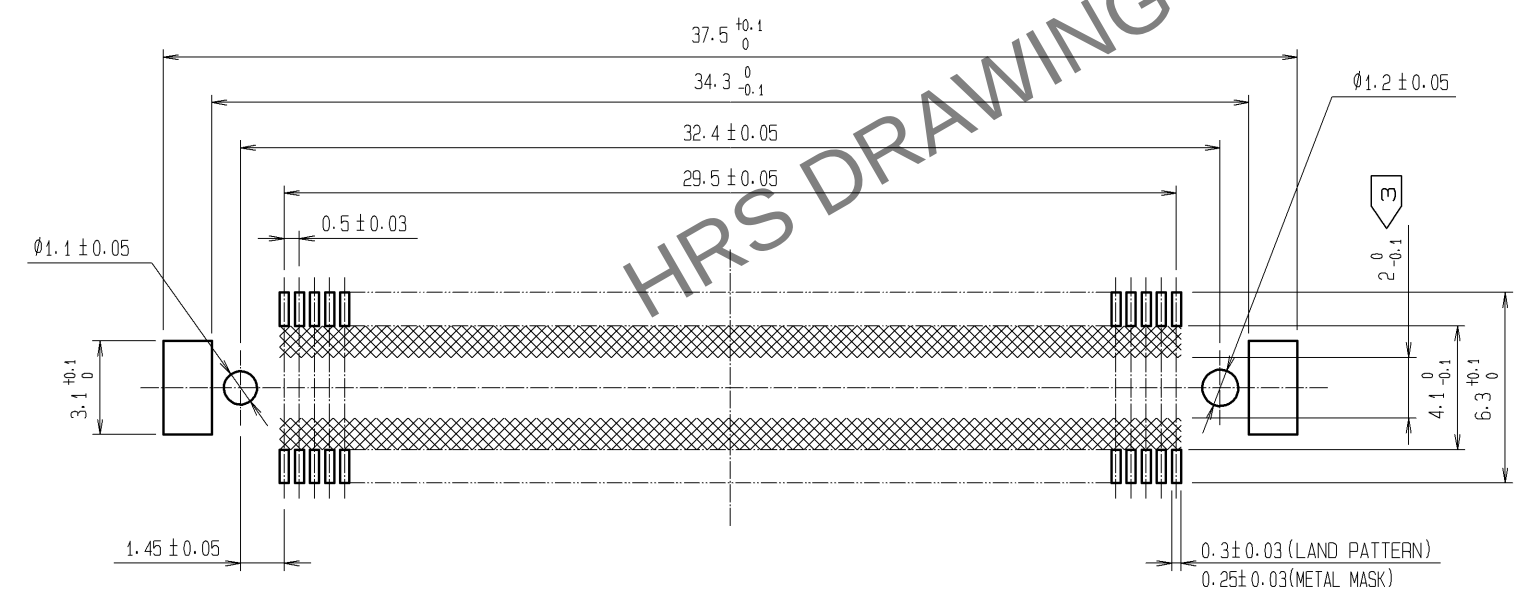

- NOTES
- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

				3	PHOSPHOR BRONZE	TIN-PLATING					
				2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.					
						LEAD AREA:TIN-PLATING 1μm min.					
							UNDER PLATING:NICKEL 1μm min.				
1	LCP	BEIGE			UL94V-0						
NO.	MATERIAL	FINISH ,			REMARKS			NO.	MATERIAL	FINISH ,	REMARKS
UNITS mm		SCALE 4 : 1		COUNT	DESCRIPTION OF REVISIONS			DESIGNED	CHECKED	DATE	
 HIROSE ELECTRIC CO., LTD.				APPROVED : HS. OKAWA	09. 04. 14			DRAWING NO. EDC3-151953-25			
				CHECED : HT. YAMAGUCHI	09. 04. 14			PART NO. FX10A-120P-SV (71)			
				DESIGNED : SY. KAMIGA	09. 04. 14			CODE NO. CL570-0042-2-71			
				DRAWN : HK. SUNADORI	09. 04. 13			 1/1			