


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

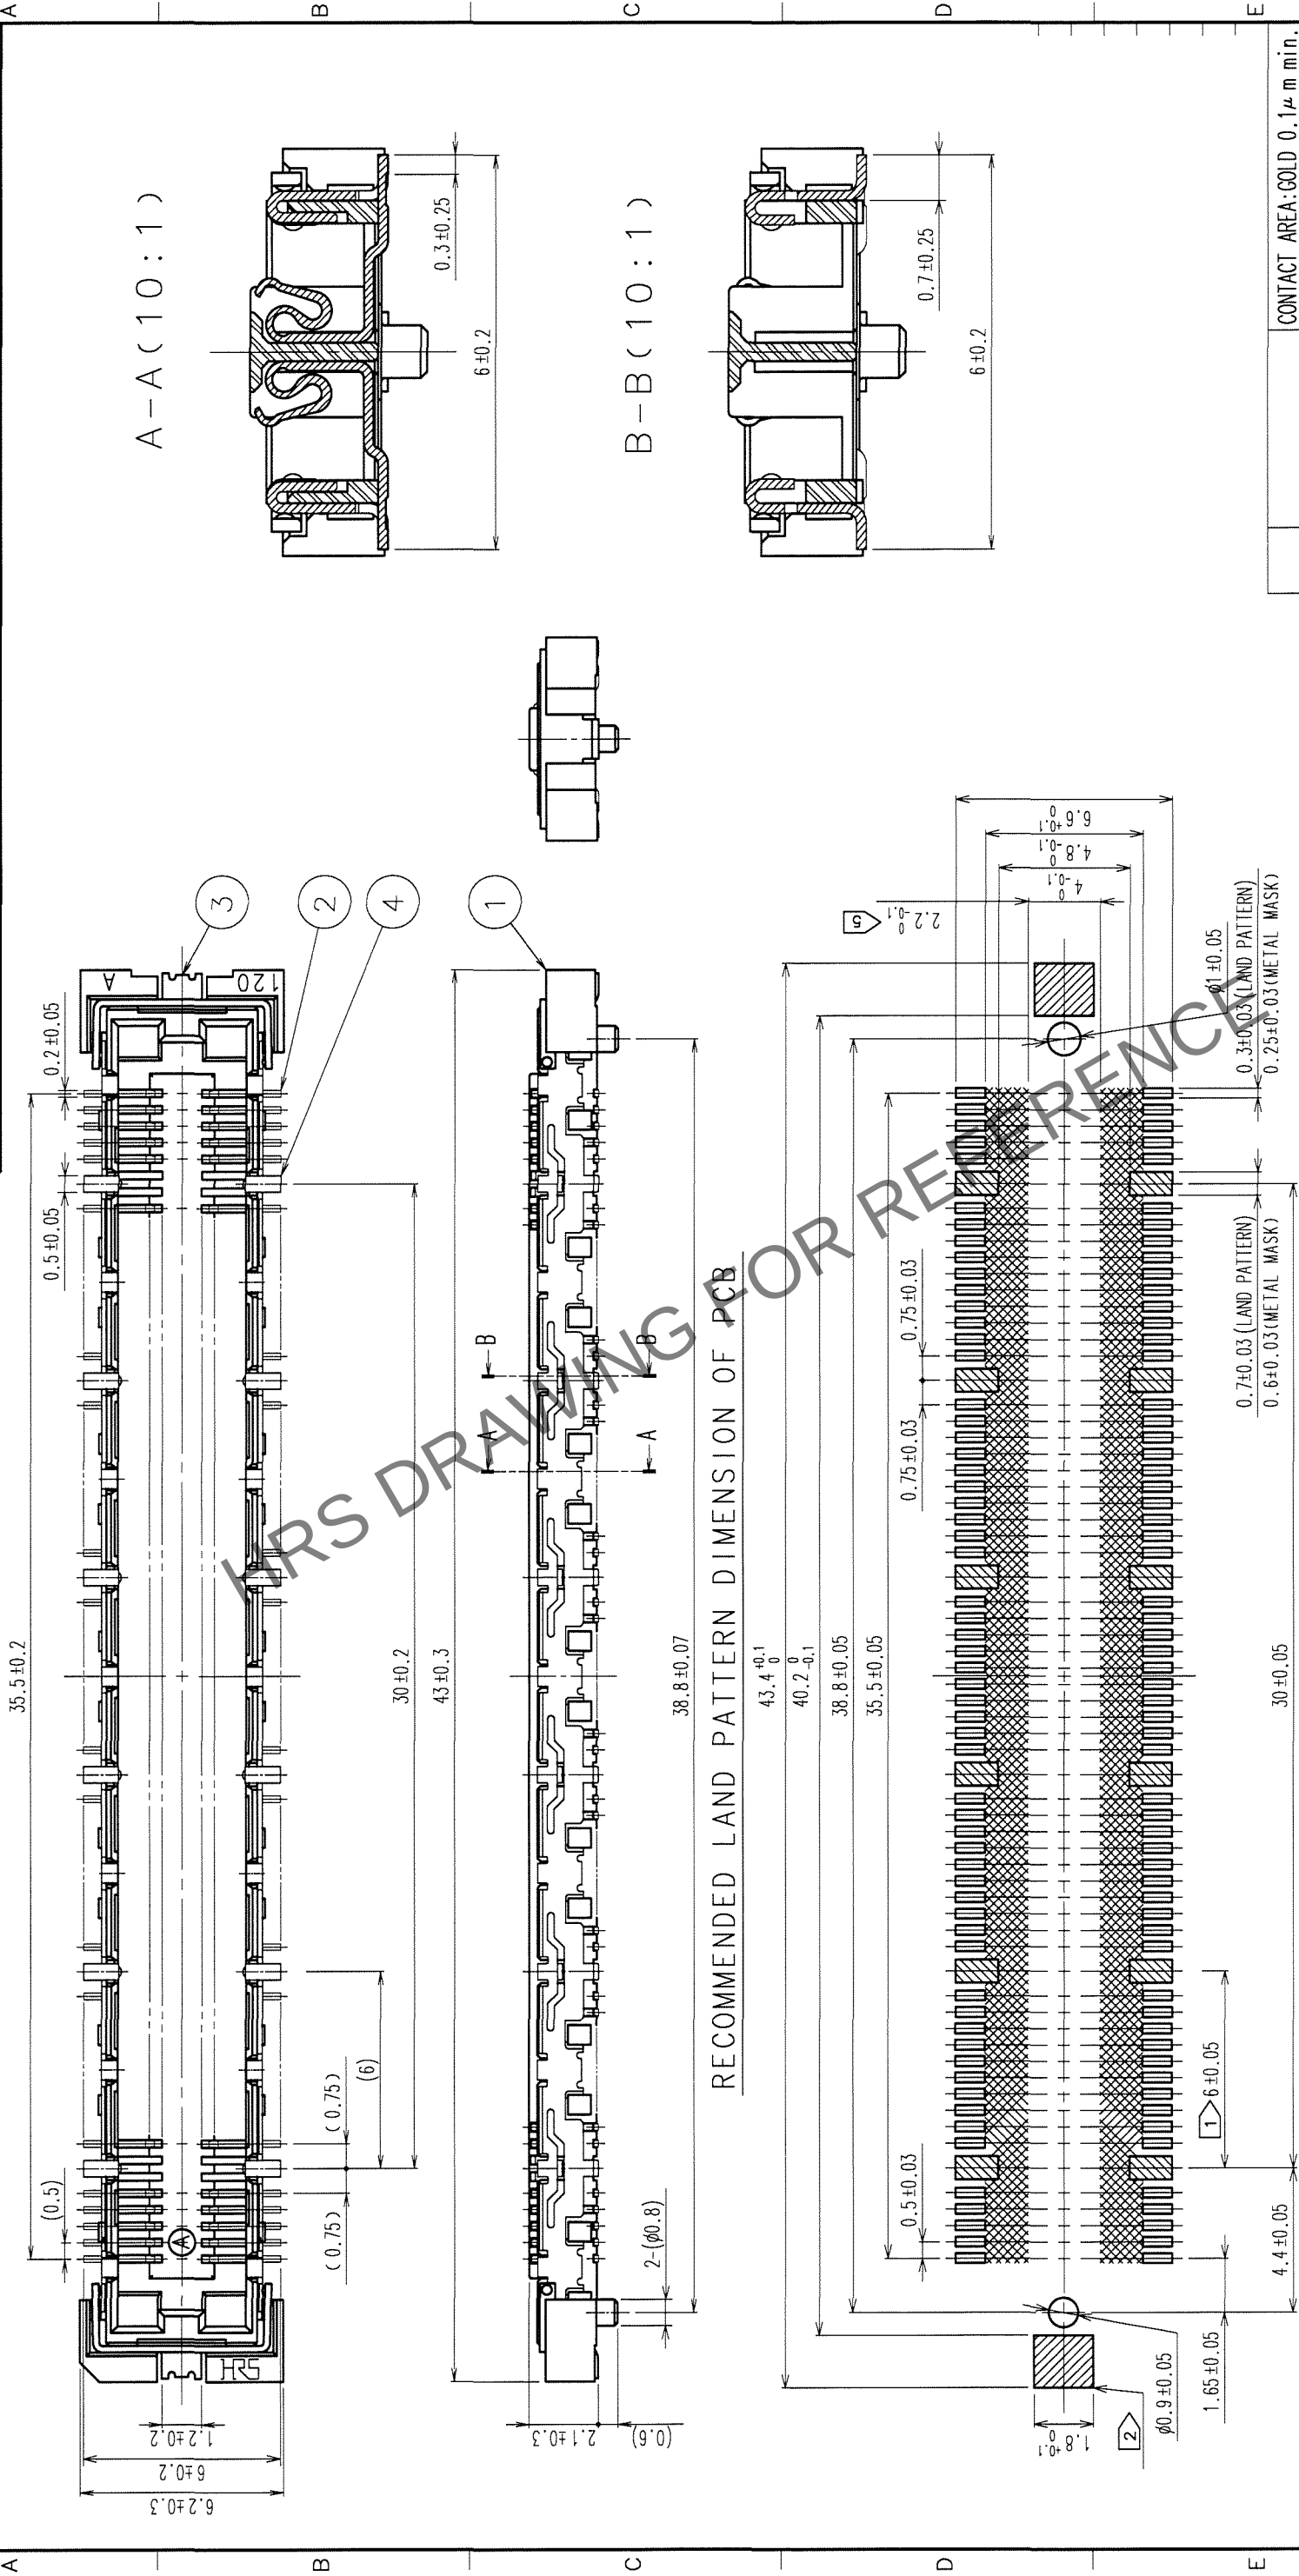

NOTES 1 12 HATCHED PARTS: GROUND CIRCUIT.
2 2 HATCHED PARTS: GROUND CIRCUIT.
3 SMT LEAD-COPLANARITY: 0.1 MAX.
4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
5 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
6 DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3, 4	PHOSPHOR BRONZE	TIN-PLATING	2	PHOSPHOR BRONZE	CONTACT AREA: COLD 0.1μm min.
1	LCP	BEIGE UL94V-0			LEAD AREA: COLD FLASH
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	UNDER PLATING: NICKEL 1μm min.
CODE NO. (COLD)	CL		DESIGNED	CHECKED	APPROVED
			K. NAKAMURA	K. NAKAMURA	H. KAWA
			06.02.20	06.02.20	06.02.20
DRAWING NO.	EDC3-152635-25	PART NO.	FX11A-120S/12-SV(71)		
SCALE	5 : 1	CODE NO.	CL573-0705-7-71		
UNITS	mm				