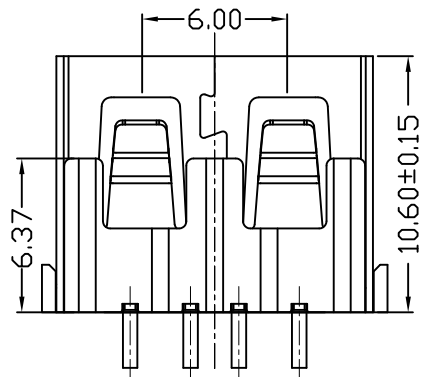
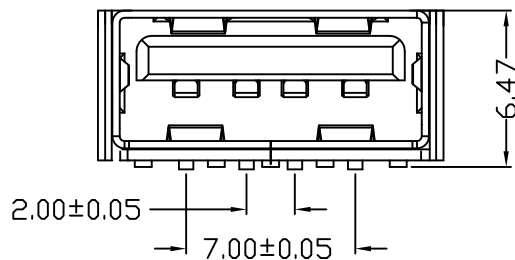
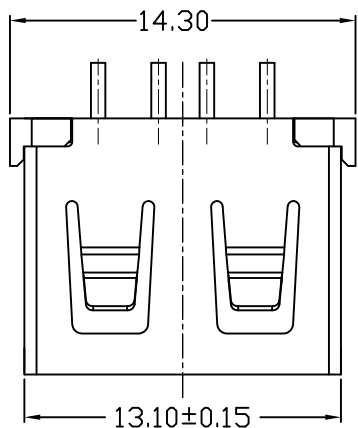


#### NOTES:

- 1.HOUSING: SEE NOTES,  
TERMINAL: SEE NOTES.  
SHELL: SEE NOTES.

#### SPECIFICATION:

- 1.ELECTRICAL CHARACTERISTIC:  
CONTACT RESISTANCE: 30M $\Omega$  MAX  
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN  
INSULATION RESISTANCE: 1000M $\Omega$  MIN  
2.MECHANICAL CHARACTERISTIC:  
INSERTION FORCE: 35N(3.57KGF) MAX  
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN  
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N  
5000 CYCLES MIN  
5000 CYCLES EXTRACTION FORCE:3~35N

#### 3.ENVIRONMENTAL:

OPERATING TEMPERATURE: -55℃+85℃

#### 4.Contact finish:

- 01:Selective Gold Flash  
02:Selective Gold 3U"  
03:Selective Gold 5U"  
04:Selective Gold 15U"  
05:Selective Gold 30U"

#### 产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

|      |       |      |       |
|------|-------|------|-------|
| X.   | ±0.15 | X.   | ±5.°  |
| .X   | ±0.10 | .X   | ±2.°  |
| .XX  | ±0.05 | .XX  | ±1.°  |
| .XXX | ±0.03 | .XXX | ±0.5° |

## 深圳市精拓金电子有限公司

|             |            |               |       |                         |                                                                                                 |
|-------------|------------|---------------|-------|-------------------------|-------------------------------------------------------------------------------------------------|
| 单位<br>UNITS | MM         | 制图<br>DRAWING | Z-Y-B | 制图料号<br>PRODUCT PART NO | 912-421A2032Y10100                                                                              |
| 比例<br>SCALE | 1:1        | 审核<br>CHKD    |       | 产品名称<br>PRODUCT NAME    | AF10. 6D款180度无脚无边方弹铁壳<br>LCP本色6.5                                                               |
| 日期<br>DATE  | 2012.09.24 | 核准<br>APPD    |       | 角法<br>VIEW              |  版本<br>VER |
|             |            |               |       |                         | AD                                                                                              |