



Connectors > PCB Connectors > PCB Headers & Receptacles > Header Assembly: Wire-to-Board, 15A, gold or tin plated



Connector System: **Wire-to-Board**

Number of Positions: **5**

Number of Rows: **1**

Centerline (Pitch): **5.08 mm [.2 in ]**

PCB Mount Orientation: **Vertical**

[All Header Assembly: Wire-to-Board, 15A, gold or tin plated \(134\)](#)

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| Connector System                  | Wire-to-Board         |
| Header Type                       | Fully Shrouded        |
| Sealable                          | No                    |
| Connector & Contact Terminates To | Printed Circuit Board |
| PCB Connector Assembly Type       | PCB Mount Header      |

Configuration Features

|                       |          |
|-----------------------|----------|
| Number of Positions   | 5        |
| Number of Rows        | 1        |
| PCB Mount Orientation | Vertical |

Body Features

|                       |       |
|-----------------------|-------|
| Primary Product Color | Black |
|-----------------------|-------|

Contact Features

|  |  |
|--|--|
|  |  |
|--|--|



|                                                |                |
|------------------------------------------------|----------------|
| Contact Mating Area Plating Material Thickness | .76 µm[30 µin] |
| Contact Mating Area Plating Material           | Gold           |
| Contact Type                                   | Pin            |
| Contact Current Rating (Max)                   | 15 A           |

Termination Features

|                           |                       |
|---------------------------|-----------------------|
| Termination Method to PCB | Through Hole - Solder |
|---------------------------|-----------------------|

Mechanical Attachment

|                          |               |
|--------------------------|---------------|
| Mating Alignment Type    | Keyed         |
| Mating Retention         | With          |
| PCB Mount Retention Type | Retention Leg |
| Connector Mounting Type  | Board Mount   |
| Mating Alignment         | With          |
| PCB Mount Alignment      | Without       |
| PCB Mount Retention      | With          |

Housing Features

|                    |                |
|--------------------|----------------|
| Housing Material   | Polyester GF   |
| Centerline (Pitch) | 5.08 mm[.2 in] |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |                |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

|                  |           |
|------------------|-----------|
| Packaging Method | Box, Tube |
|------------------|-----------|

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                         |
|-----------------------------------------------|-----------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                               |
| EU ELV Directive 2000/53/EC                   | Compliant                               |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006        |                                         |



Current ECHA Candidate List: JUNE 2024 (241)  
Candidate List Declared Against: JUNE 2024 (241)  
Does not contain REACH SVHC

|                 |                                                |
|-----------------|------------------------------------------------|
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
|-----------------|------------------------------------------------|

Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 2-178128-5  
DYNAMIC 3200 REC HSG 5P Y


Also in the Series | Dynamic 3000 Series

Connector Contacts(94)

Connector Hardware(8)

Insertion & Extraction Tools(2)

PCB Headers & Receptacles(283)

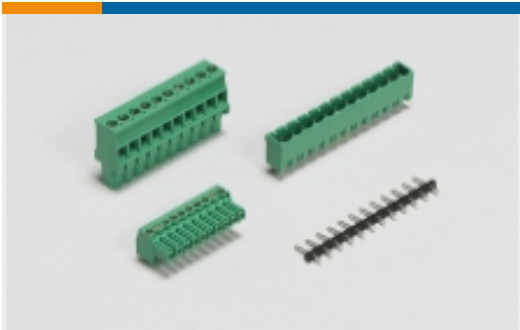

PCB Terminal Blocks(37)




Standard Rectangular Connectors(2)




Wire-to-Board Connector Assemblies & Housings(152)

Customers Also Bought

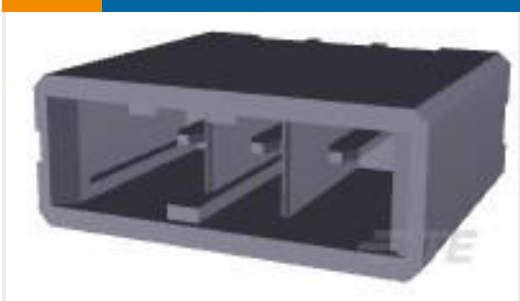

TE Part #1-178136-3  
DYNAMIC D3200 HDR V ASSY 3P

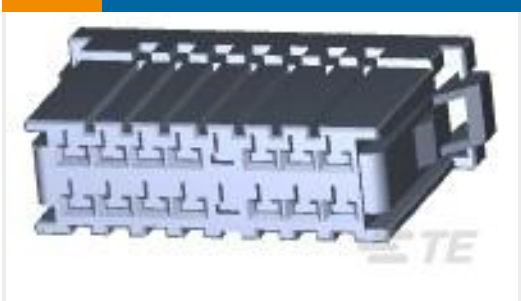

TE Part #178289-7  
DYNAMIC D3100 REC HSG 16P



TE Part #1318124-1  
DYNAMIC D2100 HDR V ASSY 6P




TE Part #520988-2  
ULTRA-POD 250 ASSY REC 22-18 AWG TPBR



TE Part #3-582118-2  
TEST PROBE REC130 BI RED GPBR



TE Part #6376610-2  
MICRO STACK HDR ASSY 80P H=9 WITH TAPE

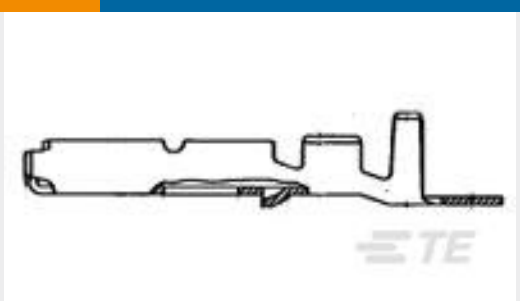

TE Part #172774-2  
MIC MK-2 REC CONTACT LP

Documents

Product Drawings

DYNAMIC D-3200 HDR ASSY 5P V

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2-316132-3\_B.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2-316132-3\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2-316132-3\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



---

Product Specifications

Product Specification

English

---

Agency Approvals

TUV Certificate

English