

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.


SPC—F005.DWG

REVISIONS



DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			MRD	18-08-10	JAG	20-08-10	XXX	30-08-10

DOC. NO. SPC—F005 * Effective: 7/8/02 * DCP No: 1398


Ø1.5 (Ø0.059")

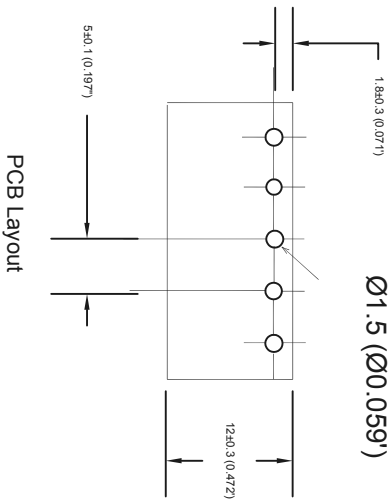

PCB Layout

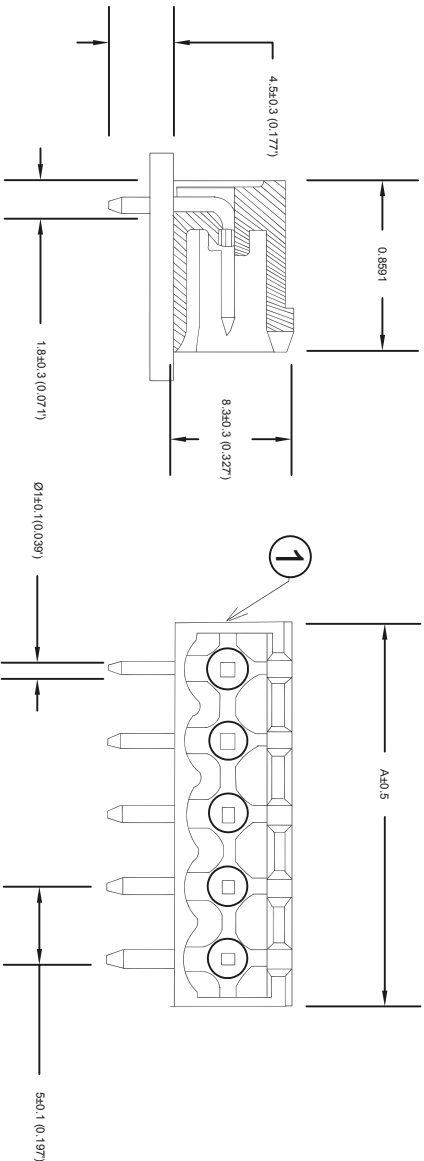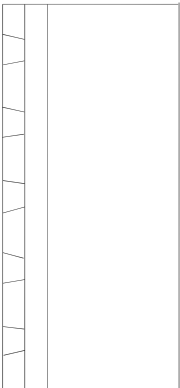

Dimensions : Millimeters



Specifications

Current rating : 6amp AC 300V
Insulation withstands volt : AC2000V min
Insulation resistance : >2000M Ω DC 500 V
Operation temperature : -40°c to +105°c

CONFIRMED & ACCEPTED BY:				
Material		Polyamide 66(UL94V-0)	Plating/Finish	Remarks
1 Insulating body			Tin plated	Green
2 Solder pin		Brass		

Pitch : 3.81mm(0.150inch)					
Poles	A(mm)	A(in)	Poles	A(mm)	A(in)
2	11.60	0.457	15	76.60	3.016
3	16.60	0.654	16	81.60	3.213
4	21.60	0.850	17	86.60	3.409
5	26.60	1.047	18	91.60	3.606
6	31.60	1.244	19	96.60	3.803
7	36.60	1.441	20	101.60	4.000
8	41.60	1.638	21	106.60	4.197
9	46.60	1.835	22	111.60	4.394
10	51.60	2.031	23	116.60	4.591
11	56.60	2.228	24	121.60	4.787
12	61.60	2.245	25	126.60	4.984
13	66.60	2.622			
14	71.60	2.819			

Dimensions : Inches (mm)

Part Number Table

Description	Part Number
Plugable Header	ME030-50003

DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWING TITLE:

Plugable Header

DRAWN BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
MRD	18-08-10	A	XXX	04R7054 ME030-500XX	
CHECKED BY:	DATE:	SCALE:	NTS	U.O.M.: Millimeters	SHEET: 1 OF 1
JAG	20-08-10				
APPROVED BY:	DATE:				
XXX	30-08-10				