


LOC	DIST	REVISIONS					
AI	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	INITIAL REVISION	21AUG17	LS	GS

CRIMPAC II

FRONT VIEW

SIDE VIEW

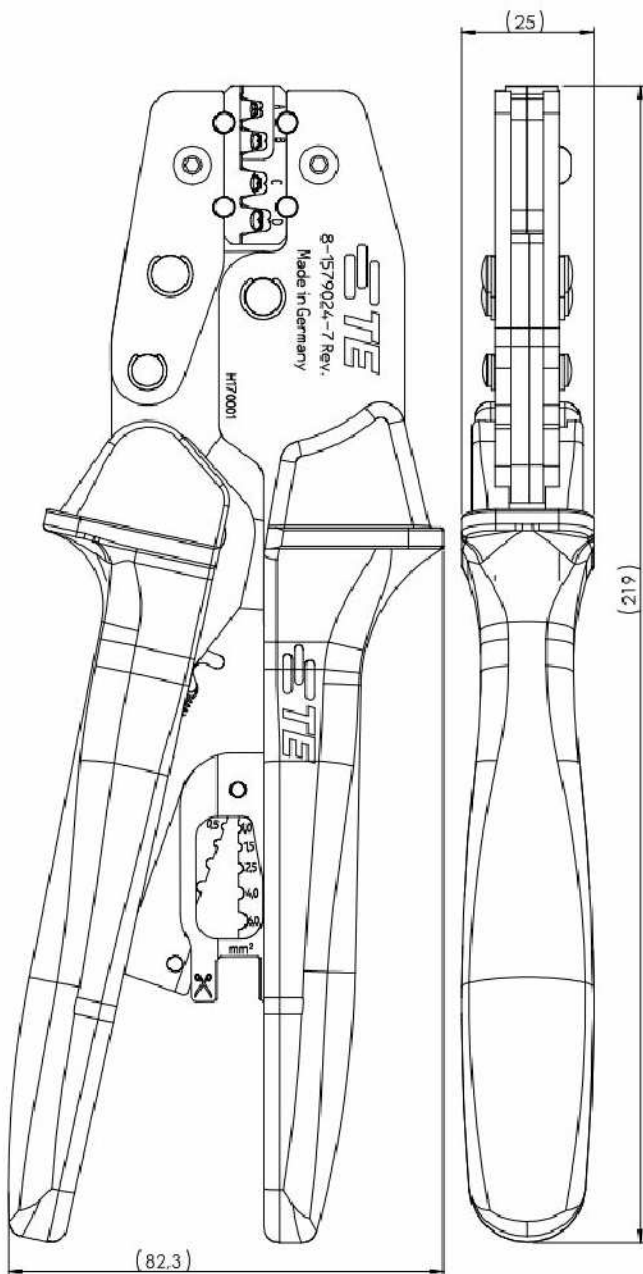

Eigenschaften / Features

Ausgerichtet auf die industrielle Anwendung können unterschiedliche Querschnitte präzise verarbeitet werden.

Das Doppelführungssystem garantiert eine gleichmäßige Schließkraft und präzise verwindungssteife Führung in allen Profilen und ermöglicht so die Einhaltung kleinster Toleranzen.

These crimp tools are especially designed for industrial applications to precisely crimp cross-sections.

The double-guidance-system guarantees an even closing force and precise twist resistant guidance for every profile and thus ensures the compliance to the smallest tolerances.

Abmessungen / Dimension

Länge/Length: 220 mm

Breite/Width: 80 mm

Tiefe/depth: 25mm

Bedienungsanleitung /

Operating instructions


411-18629 / TE P/N 7-744017-6

THIS DRAWING IS UNPUBLISHED.

ALL INTERNATIONAL RIGHTS RESERVED.

BY TYCO ELECTRONICS CORPORATION.

© COPYRIGHT

DIMENSIONS:		DWN L. Sandhu	21AUG2017	MATERIAL		FINISH	
mm		CHK C. Witt	21AUG2017	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. Stegmayer	21AUG2017				
		PRODUCT SPEC					
0 PLC	± -	APPLICATION SPEC		-		RESTRICTED TO -	
1 PLC	± -			SIZE	CAGE CODE		
2 PLC	± -	WEIGHT 0.52kg		A4	00779	C-8-1579024-7	
3 PLC	± -			CUSTOMER DRAWING		SCALE	SHEET
4 PLC	± -						
ANGLES	± -						