



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F008.DWG



REVISIONS

DOC. NO. SPC-F008 * Effective: 7/8/02 * DCP No: 1398



DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1876	A	RELEASED	EO	07/25/06	JN	2/13/08	JN	2/13/08
1959	B	Shell Plate was Zinc	JN	2/13/08	JN	2/13/08	JN	2/13/08



RoHS
Compliant

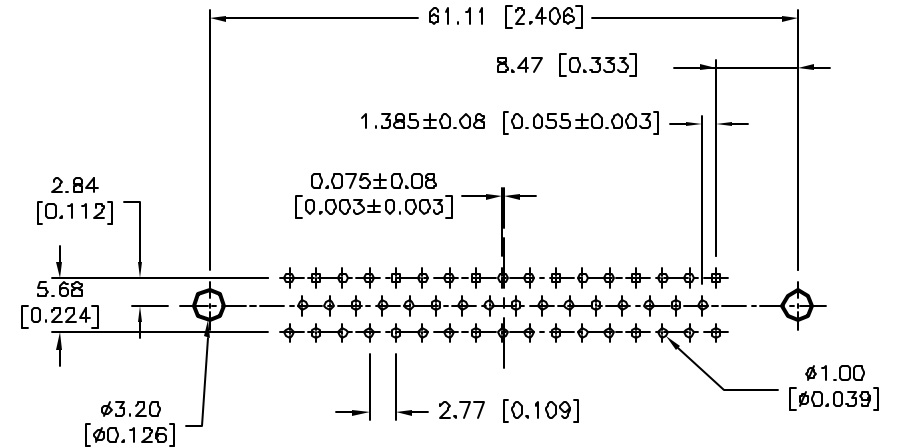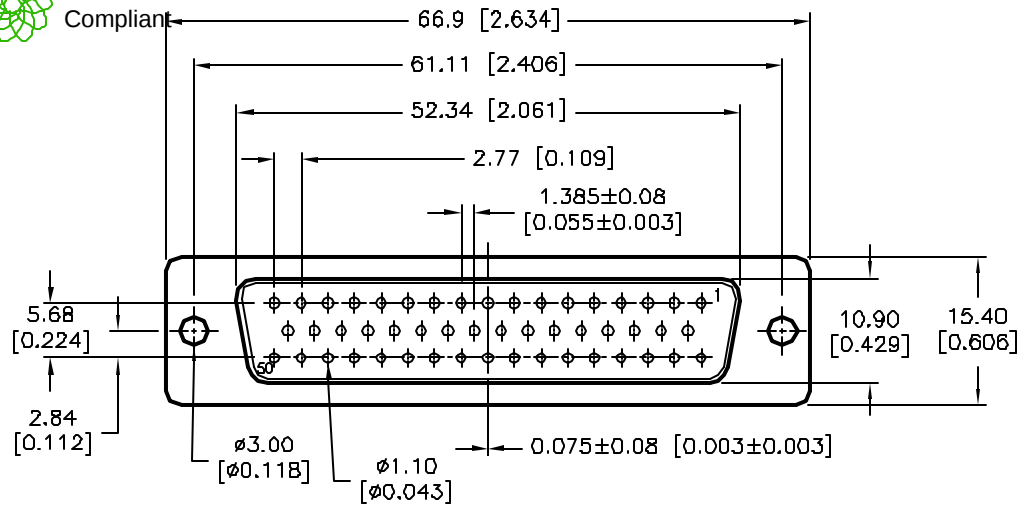

P.C.B. LAYOUT

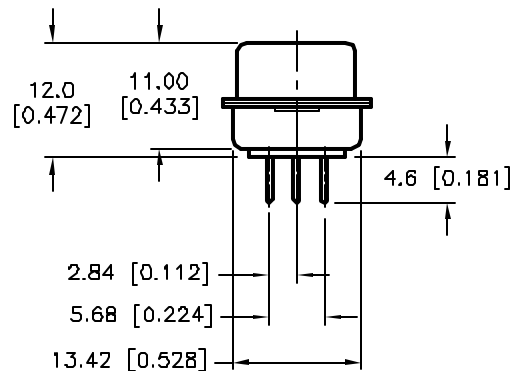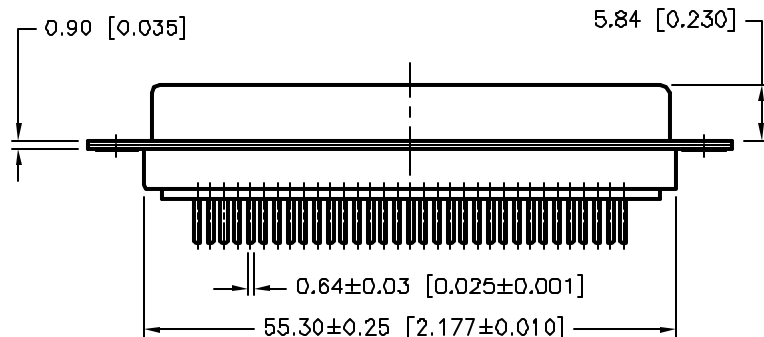

SPECIFICATIONS:

1. Shell: Steel, Tin-Plate
2. Contact: Brass, Machine Pin Gold-Plated over Nickel
3. Insulator: PBT & Fiber-Glass Reinforced, Blue Color
4. Current Rating: 5 Amps
5. Dielectric Strength: 1000 V for One Minute
6. Insulator Resistance: 1000 Megohms Min. at 500 VDC
7. Temperature: -50°C to +105°C

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

Unless Otherwise
Specified

.X ±0.35 [0.014]

.XX ±0.2 [0.008]

DRAWN BY:

EKLAS ODISH

CHECKED BY:

Jason Nash

APPROVED BY:

Jason Nash

DATE:

07/25/06

DATE:

2/13/08

DATE:

2/13/08

DRAWING TITLE:

50 Pin Straight PCB D-Sub Socket

SIZE

A

DWG. NO.

SPC15379

ELECTRONIC FILE

79K4963.DWG

REV

B

SCALE:

NTS

U.O.M.: mm [INCHES]

SHEET: 1 OF 1