

NOTES:

1.MATERIAL:

1.1 Housing:thermoplastic plastics

1.2 terminals:Copper Alloy

Gold plated in contact area:

Tin plated in termination

Nickel Plated overall

1.3 Shell:Steel&Copper Alloy

Nickel Plated overall

2.ELECTRICAL CHARACTERISTICS:

2.1 Rating Current :1.5 Ampere

2.2 Rating Voltage :30 V Max

2.3 Contact Resistance:30 Milli ohms

2.4 Insulation Resistance:1000 Mega ohms Min.

3.MECHANICAL CHARACTERISTICS:

3.1 Connector Mating force:35N MAX(3.57Kgf)

3.2 Connector Unmating force:10N min(1.02Kgf)

3.3 Durability:1500Cycles.







4.ENVIRONMENT CHARACTERISTICS:

4.1 Operating temperature:0℃ to +50℃

4.2 Storage temperature:-20℃ to +60℃

Contact Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND
5	VBUS
6	D-
7	D+
8	GND

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:USB AF 90度双层半包脚宽15.5 弯脚
DECIMALS:	ANGLES:		PAR USB-268-BRY
X.X±0.30	X.*±5°		DWN
X.XX±0.25	X.X*±1°		CHKD
X.XXX±0.15		CUSTOMER COPY	APVD
		SCALE N:A	UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A

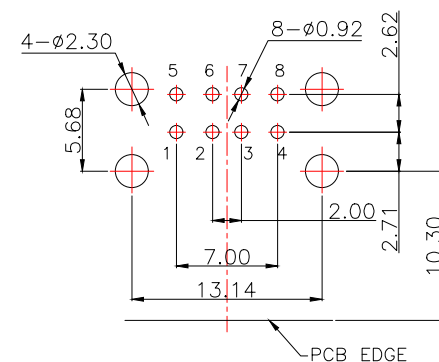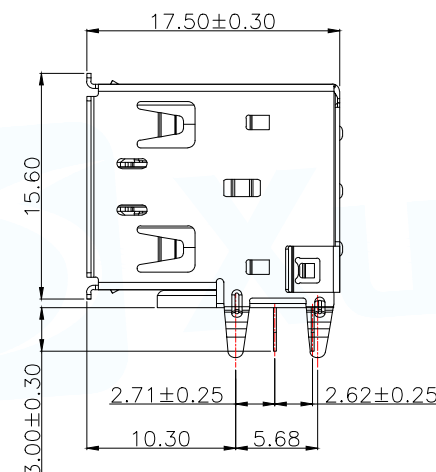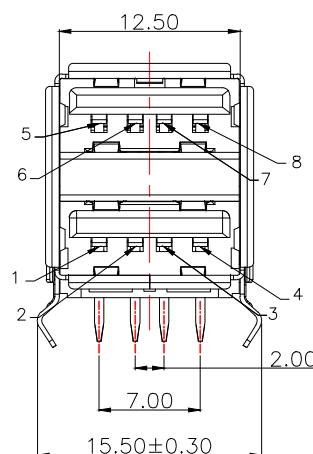

RECOMMEND P.C.B LAYOUT
TOLERANCE:±0.05(TOP VIEW)