


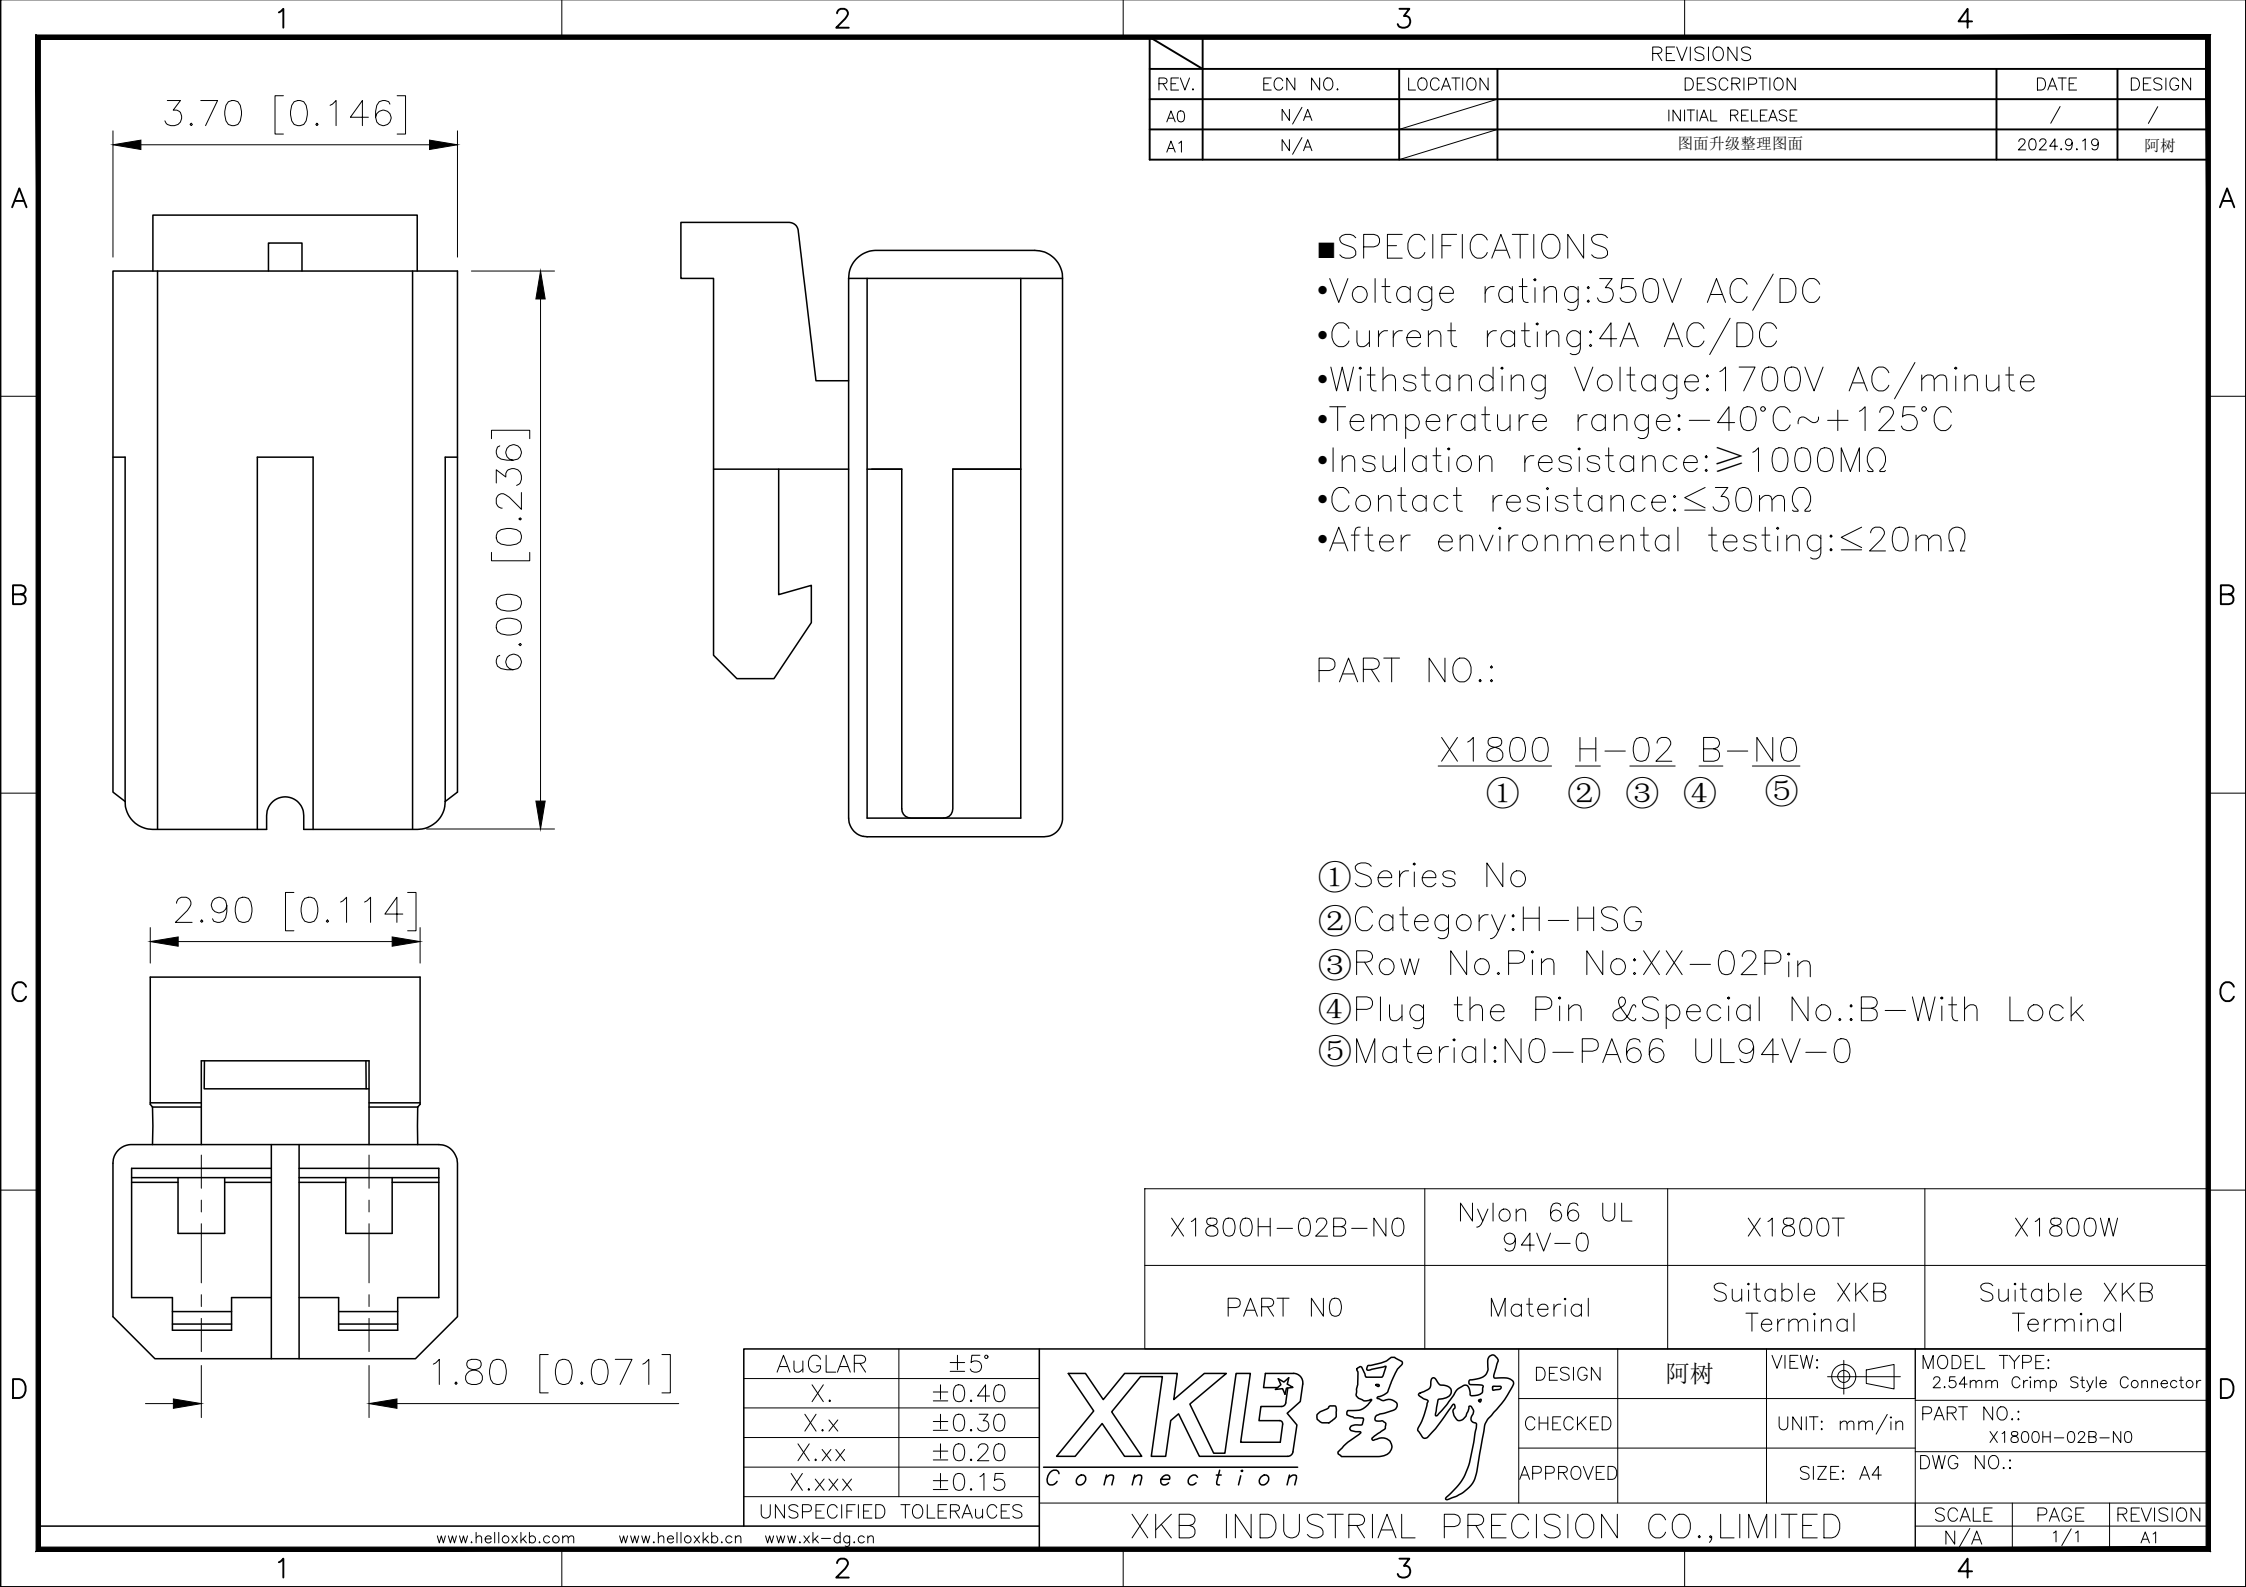

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.19	阿树

- SPECIFICATIONS
- Voltage rating:350V AC/DC
 - Current rating:4A AC/DC
 - Withstanding Voltage:1700V AC/minute
 - Temperature range:−40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤30mΩ
 - After environmental testing:≤20mΩ

PART NO.:

X1800 H-02 B-N0
① ② ③ ④ ⑤

- ①Series No
②Category:H-HSG
③Row No.Pin No:XX-02Pin
④Plug the Pin &Special No.:B-With Lock
⑤Material:N0-PA66 UL94V-0

X1800H-02B-N0	Nylon 66 UL 94V-0	X1800T	X1800W
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.54mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X1800H-02B-N0
APPROVED		SIZE: A4	DWG NO.: