


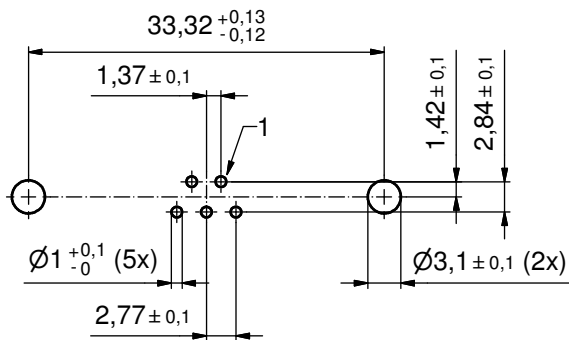
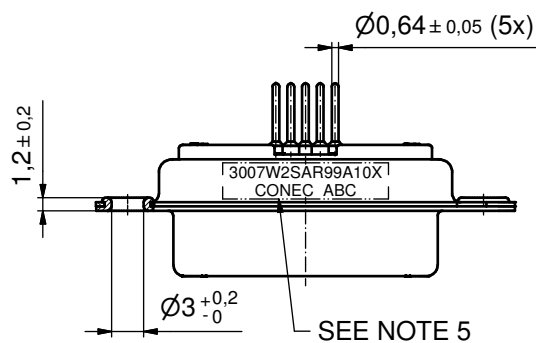
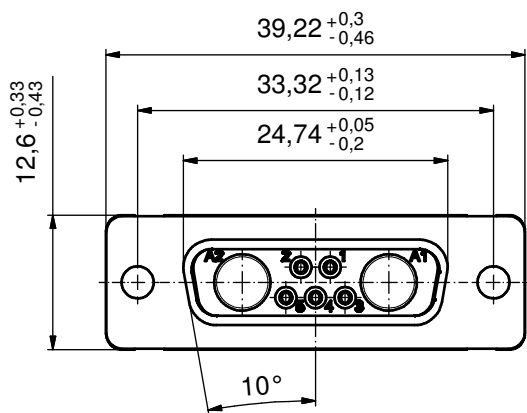




P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

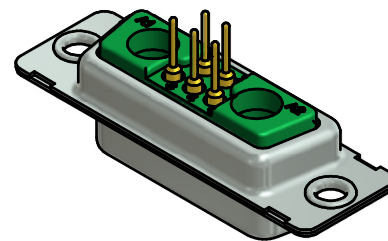

SEE NOTE 5

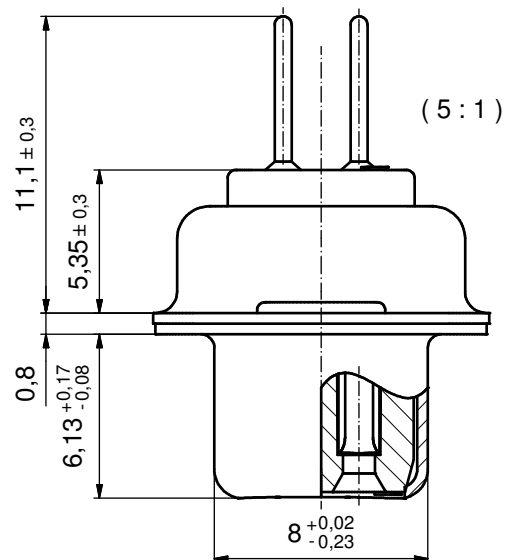

NOTES:

- METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
- INSULATORS: PBT GF UL 94 V-0; GREEN
- SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
- NO CONTACTS ON POS. A1 - A2
- CONNECTOR IS PART MARKED: 3007W2SAR99A10X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH										tolerance				 dim. in mm		scale: 2:1 (5:1)							
																		material: SEE NOTES					
														date				name					
														drawn 15.02.13				Henneboel					
														appd. 15.02.13				Koch					
DO NOT ALTER CAD DRAWING BY HAND														title: D-SUB COMBINATION FEMALE 7W2S SOLDER PIN									
																		norm					
																		d-old					
																		dwg no:				DIN-A3	
																						sh: 1	
a				Original								13K1A4187											
rev.				description				date				name				part no: 3007W2SAR99A10X							
																							

CONEC