

## Heyco® Threaded Vent Plugs


Open vent holes only

| THREAD<br>Type/Size                              | PART NO. |      | DESCRIPTION | PART DIMENSIONS                      |      |                                     |      |
|--------------------------------------------------|----------|------|-------------|--------------------------------------|------|-------------------------------------|------|
|                                                  | Black    | Gray |             | A<br>Wrenching Flats<br>in.      mm. |      | B<br>Overall Length<br>in.      mm. |      |
| NPT                                              |          |      |             |                                      |      |                                     |      |
| NPT 1/4                                          | 3551B    | 3551 | TVP NPT 1/4 | .63                                  | 16,0 | .66                                 | 16,8 |
| NPT 3/8                                          | 3552B    | 3552 | TVP NPT 3/8 | .83                                  | 21,0 | .69                                 | 17,5 |
| NPT 1/2                                          | 3553B    | 3553 | TVP NPT 1/2 | .98                                  | 24,9 | .81                                 | 20,6 |
| NPT 3/4                                          | 3554B    | 3554 | TVP NPT 3/4 | 1.29                                 | 32,8 | .86                                 | 21,8 |
| PG - for PG Thread specifications, see page 3-49 |          |      |             |                                      |      |                                     |      |
| Pg 7                                             | 3566B    | 3566 | TVP Pg 7    | .63                                  | 16,0 | .53                                 | 13,5 |
| Pg 9                                             | 3567B    | 3567 | TVP Pg 9    | .83                                  | 21,0 |                                     |      |
| Pg 13.5                                          | 3568B    | 3568 | TVP Pg 13.5 | .98                                  | 24,9 | .62                                 | 15,8 |
| Pg 21                                            | 3569B    | 3569 | TVP Pg 21   | 1.29                                 | 32,8 | .76                                 | 19,3 |
| Metric                                           |          |      |             |                                      |      |                                     |      |
| M12                                              | 3557B    | 3557 | TVP M12     | .63                                  | 16,0 | .53                                 | 13,5 |
| M16                                              | 3558B    | 3558 | TVP M16     | .83                                  | 21,0 |                                     |      |
| M20                                              | 3559B    | 3559 | TVP M20     | .98                                  | 24,9 | .62                                 | 15,8 |

Standard color Black. Consult Heyco for other colors.



- Permit the passage of air for ventilation and heat dissipation.
- Quick and easy installation into Threaded Holes.
- For multiple thread sizes and types.
- All sizes and types feature six (6) .094" (2,4 mm) diameter vent holes.
- Threaded plugs for hydraulic and pneumatic applications.
- Lower cost option over brass or steel plugs.
- Non-corrosive-resist salt water, weak acids, gasoline, alcohol, oil, grease and common solvents. Resist oil and heat up to 221°F (105°C).
- Approximate Head Thickness: .21" (5,3 mm). Thickness may vary.
- Hex shaped head for wrench installation.
- Electrically non-conductive Nylon 6/6.
- For **Liquid Tight** Threaded Vent Plugs, see page 5-5.

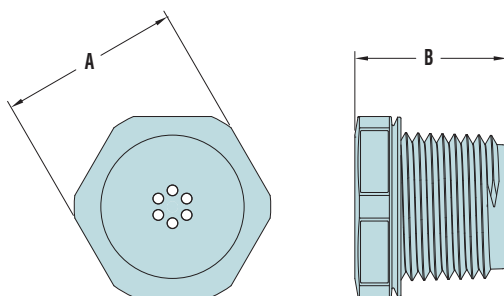

|                     |                                      |
|---------------------|--------------------------------------|
| Material            | Nylon 6/6 bodies with UL (f1) rating |
| Flammability Rating | 94V-2                                |
| Temperature Range   | -40°F (-40°C) to 221°F (105°C)       |

*Quick  
Specs*