



6		7		8	
REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2020. 06. 12



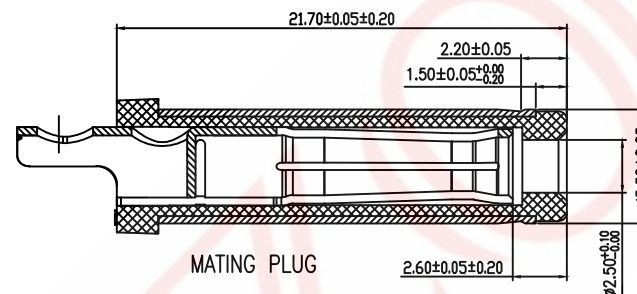


SCHEMATIC

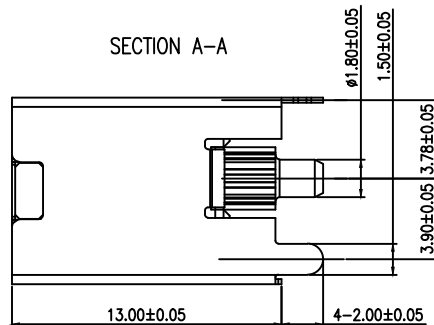

SPECIFICATION:


1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30mΩ MAX.(INITIAL)
50mΩ MAX.(FINAL)
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

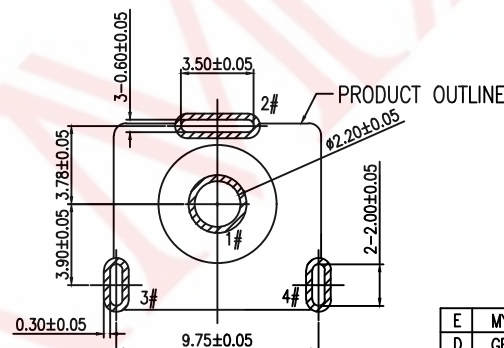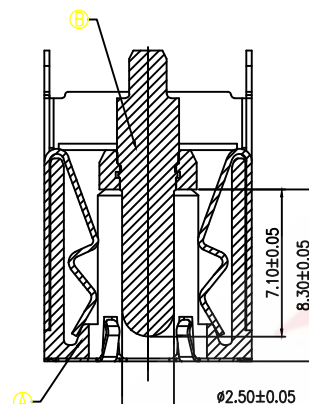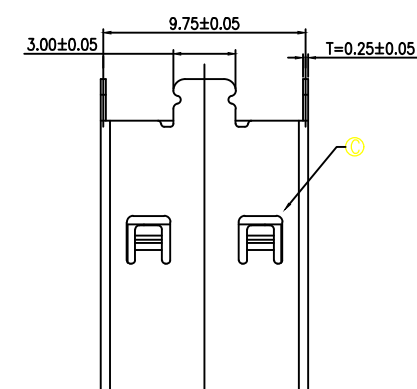

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

E	MYLAR			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY


- Model Definition
- Mould Number: MX1076
- Needle Diameter: 2.5mm
- Fixing Method: Without Fixed Column
- Interface Method: Conventional Flared Opening
- Overall Length: 13.0mm
- Pin Position: 4 Pins
- Mounting Method: Vertical (DIP)
- Product Series: DC Power Jacks



3D VIEW

			GENERAL TOLERANCE	
			$\geq 0 \sim 2 <$	± 0.15
DESIGN	WANGGUIFA	2018.06.12	$\geq 2 \sim 5 <$	± 0.25
CHECKED	ZHENGUILAN	2018.06.12	$\geq 0 \sim 2 <$	± 0.15
APPROVED	LILIANJIANG	2018.06.14	≥ 5	± 0.35

FIRST VIEW



The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

TITLE::

20A大电流 立式插件

of DWG NO: 9CL4130-A1076

PART NO: 9CL4-55251076

MODEL NO:	9CL4130BEGA
-----------	-------------

NAME: _____

DC JACK

SAMZO COMPONENTS
Electronic switch and connector manufacturer