






A

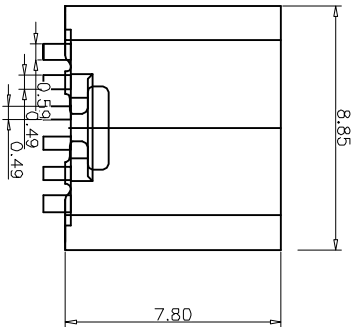

- 备注 (NOTE):
1. 材质:
- 1.1 胶芯: LCP UL94 V-0
 - 1.2 端子: C2680, T=0.2mm; 镀底, 镀金
 - 1.3 外壳: 不锈钢201-H 表面镀镍
2. 电气特性:
- 2.1. 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mV, 100mA下测量.
 - 2.2. 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.
 - 2.3. 额定电压: 5V.
 - 2.4. 耐电压: 100VAC.
 - 2.5. 绝缘电阻: 至少100兆欧.
3. 机械性能:
- 3.1. 插入力: 0.5-2.0Kg
 - 3.2. 拔出力: 0.6-2.04Kg
 - 3.3. 插拔次数: 5000次.
4. 工作环境: -20℃ to +85℃.

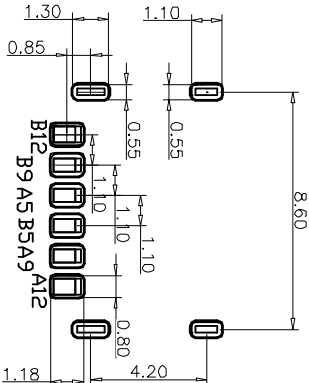

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

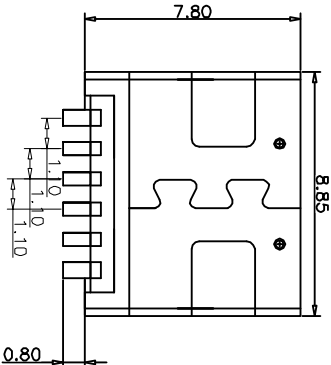


TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	ZINC ALLOY, NI30u"Min PLATED
2	CONTACT	6	C2680, TIN80u"/Au1u"/NI30u" PLATED
3	1MD HOUSING	1	LCP UL94 V-0 BLACK
4	CAP	1	LCP UL94 V-0 BLACK
5	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK



深圳市万骏达电子有限公司
http://www.wanjunda.com

品名 (ITEM NO)	TYPE-C 6P板上无弹7.8
料号 (PART NO)	TPC-6P-WT-7.8
型号 (MODEL NO)	

图号 (DWG NO)		单位 (UNIT): MM
版本 (REV)		比例 (SCALE) 1:1
日期 (DATE)		未注公差
设计 (DESIGN)		TOLERANCE UNSPECIFIED
审核 (CHECKED)		X.X ±0.30
核准 (APPROVED)		X.XX ±0.20
		X.XXX ±0.10
		X.X ±2°

D

D