

Style

M8 Plug, shielded
5 pin
B-coding

Ratings

Voltage: 30 V
Current: 3 A

Operating Temperature Range

-40 ~ 105 °C

Materials

- ① Insulator: PA66, UL 94 HB, black
- ② Pin: C3604 brass, gold flashing
- ③ Nut: C3604 brass, nickel plated
- ④ Shell: C3604 brass, nickel plated
- ⑤ O-ring: Nitrile rubber, black

Electrical Requirements

Dielectric strength: 1 min @ 500 Vac
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 10 mΩ or less

Mechanical Requirements



Life cycle: 1000 mating cycles minimum

Environmental Requirements




Salt spray test: 35 °C, relative humidity 90-95%, 5% NaCl mist for 24 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 10 mΩ.
Waterproof: IP67

Assembly Info

Wire gauge: 24 AWG max

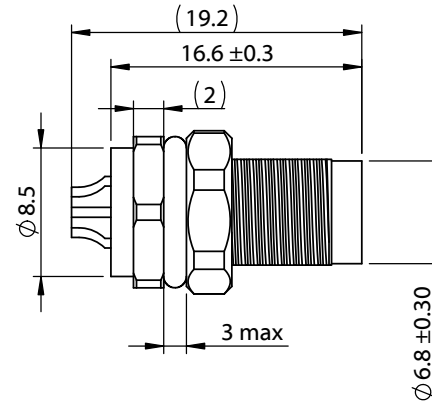

Front View
Not to Scale

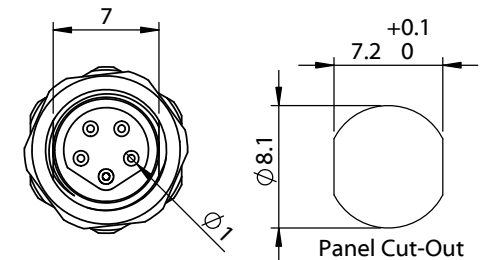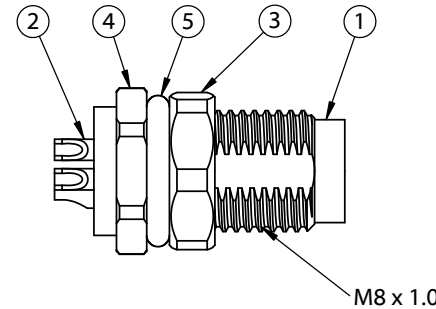

Revision:	Date:	Description:	Prepared:	Notes:	<div><h1>TENSILITY</h1><p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p><div>Size: Part number: A 54-00316</div><div>Scale: 2:1</div><div></div>Sheet 1 of 1</div>		
A	1/17/2023	Initial Release	Verified:	RoHS compliant			
			Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent			
			Tolerances: X: ± 0.3 mm X.X: ± 0.1 mm X.XX: ± 0.05 mm	Description: Connector, 5 pin M8 B-code plug, 8x19.2 mm, gold plated, panel mount, solder cup, IP67			