


Specification Sheet

CK-20

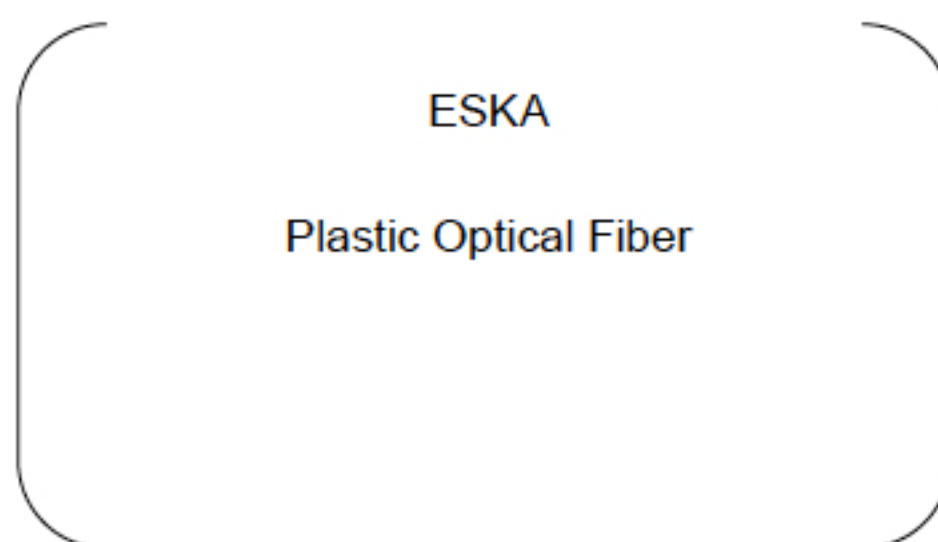

High-Performance Plastic Optical Fiber

E s k a™

MITSUBISHI RAYON CO.,LTD.

ESKA OPTICAL FIBER DIVISION

6-41 Konan 1-Chome,Minato-ku,Tokyo,JAPAN

Phone :+81-3-5495-3060

Facsimile:+81-3-5495-3212

1. Scope

The specification covers basic requirements for the structure and optical performances of CK-20.


2. Structure

Table 1

CK-20

Item		Specification			
		Unit	Min.	Typ.	Max.
Optical Fiber 1	Core Material	—	Polymethyl-Methacrylate Resin		
	Cladding Material	—	Fluorinated Polymer		
	Core Refractive Index	—	1.49		
	Refractive Index Profile	—	Step Index		
	Numerical Aperture	—	0.5		
	Core Diameter	μm	455	485	515
	Cladding Diameter	μm	470	500	530
Approximate Weight		g/m	0.24		

Sectional View

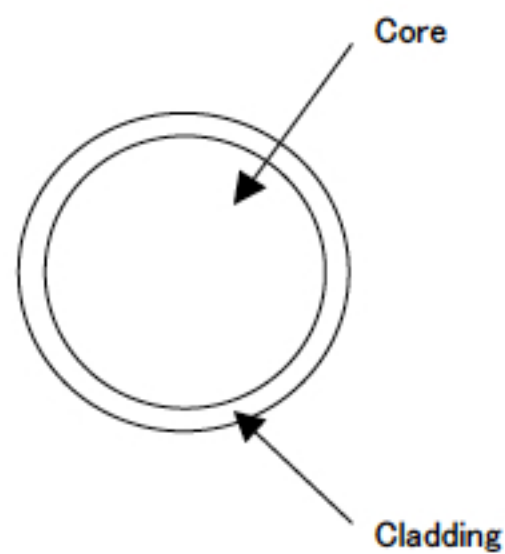

3. Performances

Table 2

CK-20

Item		Acceptance Criterion and/or [Test Condition]	Specification			
			Unit	Min.	Typ.	Max.
Maximum Rating	Storage Temperature	No Physical Deterioration [in a Dry Atmosphere]	℃	− 55	−	+70
	Operation Temperature	No Deterioration in Optical Properties* [in a Dry Atmosphere]	℃	− 55	−	+70
		No Deterioration in Optical Properties** [under 95%RH condition]	℃	−	−	+60
Optical Properties	Transmission Loss	[650nm Collimated Light] [Standard condition] [10m-1m cutback]	dB/km	−	−	250
Mechanical Characteristics	Minimum Bend Radius	Loss Increment $\leq 0.5\text{dB}$ [A Quarter Bend]	mm	10	−	−
	Tensile Strength	Tensile Force at 5% Elongation; in Conformity to the JIS C 6861]	N	14	−	−

All tests are carried out under temperature of 25℃ unless otherwise specified.

* Attenuation change shall be within +/- 10% after 1,000 hours.

** Attenuation change shall be within +/- 10% after 1,000 hours, except that due to absorbed water.