

SDS32F THRU SDS320F

Surface Mount Schottky Barrier Rectifier


Reverse Voltage - 20 to 200 V

Forward Current - 3 A

Features

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

SMAF

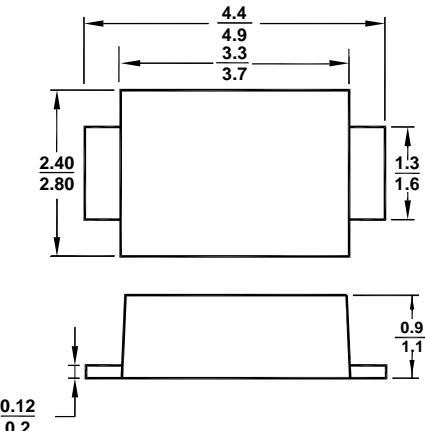

All Dimensions in mm


Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	Symbols	SDS32F	SDS34F	SDS36F	SDS38F	SDS310F	SDS312F	SDS315F	SDS320F	Unit				
	Marking	SS32	SS34	SS36	SS38	SS310	SS312	SS315	SS320	-				
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	120	150	200	V				
Maximum RMS Voltage	V_{RMS}	14	28	42	56	70	84	105	140	V				
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	120	150	200	V				
Maximum Average Forward Rectified Current	$I_{F(AV)}$	3							A					
Peak Forward Surge Current 8.3 ms Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	80				70				A				
Maximum Instantaneous Forward Voltage at 3 A	V_F	0.55		0.7	0.85		0.9	0.95		V				
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	$T_a = 25^\circ\text{C}$ $T_a = 100^\circ\text{C}$		0.5 10		0.3 5				mA				
Typical Junction Capacitance ¹⁾	C_j	250		160						pF				
Typical Thermal Resistance ²⁾	$R_{\theta JA}$	40							°C/W					
Operating Junction Temperature Range	T_j	- 55 to + 125							°C					
Storage Temperature Range	T_{stg}	- 55 to + 150							°C					

¹⁾ Measured at 1MHz and applied reverse voltage of 4 V D.C.

²⁾ P.C.B. mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.



SDS32F THRU SDS320F

Fig.1 Forward Current Derating Curve

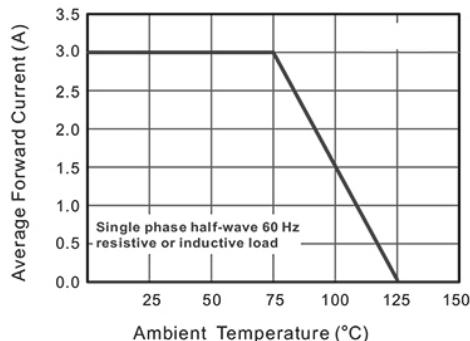


Fig.2 Typical Reverse Characteristics

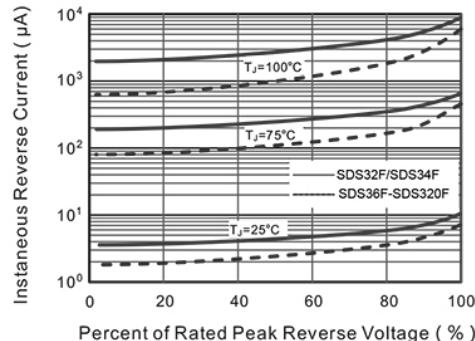


Fig.3 Typical Forward Characteristic

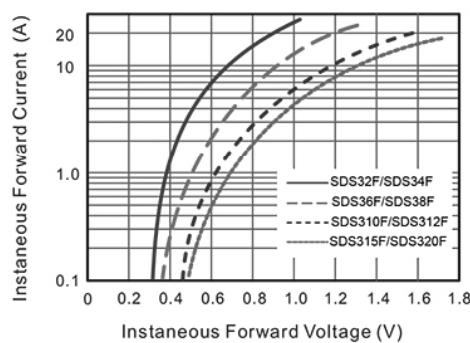


Fig.4 Typical Junction Capacitance

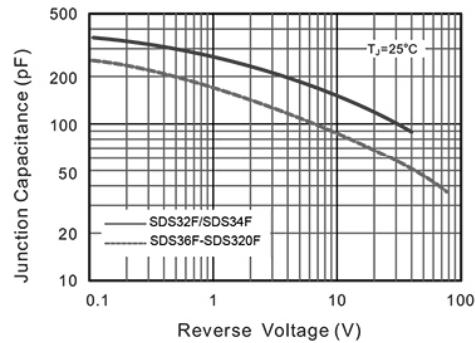


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

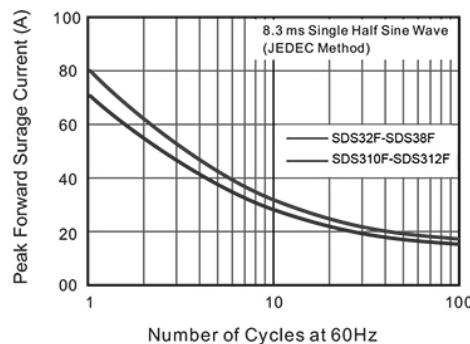


Fig.6- Typical Transient Thermal Impedance

