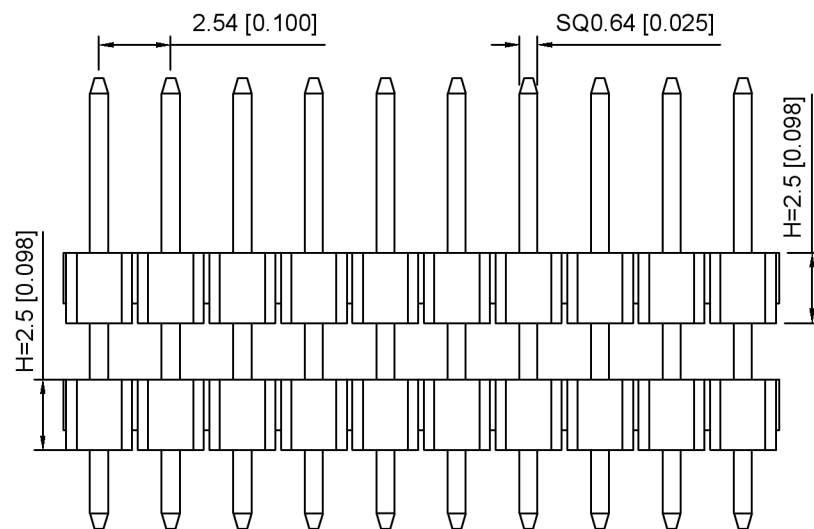
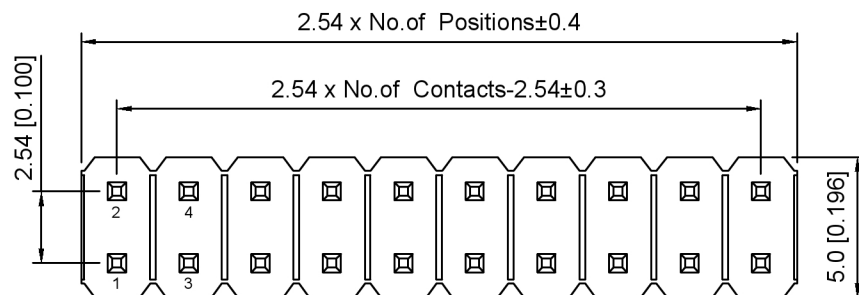


PCB LAYOUT

Specifications:
 规格:
 Voltage rating: 250V AC/DC
 额定电压: 250V AC/DC
 Current rating: 3A AC/DC
 额定电流: 3A AC/DC
 Withstanding voltage: 1000V AC/minute
 耐受电压: 1000V AC/分钟
 Temperature range: -40°C ~ +105°C
 温度范围: -40°C ~ +105°C
 Insulation resistance: ≥1000MΩ
 绝缘电阻: ≥1000MΩ
 Contact resistance: ≤20mΩ
 接触电阻: ≤20mΩ
 Material: PA6T UL94V-0
 材质: PA6T UL94V-0
 Plating Category: 1U" Gold
 镀层: 1U" Gold
 Wave soldering temperature: 255±5°C, 10S
 波峰焊温度: 255±5°C, 10S

X6522 W V - 2xXX H - C60 D30 - E80
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

1. Series No
2. Category: W-Wafer
3. Welding Board Angle: V-Stright 180°
4. Row No. Pin No: 2xXX-2x02~2x40P
5. Plastic Height: H=2.5mm
6. Pin Length: C=6.0mm
7. Pin Length: D=3.0mm
8. Pin Length: E=8.0mm

X6522WW-2xXXH-C60D30-E80	PA6T	Brass	X6521F
PART NO	Material	Material(Pin)	Suitable XKB Female

广东星坤科技股份有限公司

Δ 姓	日期
Δ 数	
Δ 章	
MARK	DESCRIPTION
文件工程章	

					ANGLAR	±5°
					L ≤ 4	±0.2
					4 < L ≤ 16	±0.3
					16 < L ≤ 63	±0.4
					L > 63	±0.5
REVISIONS						UNSPECIFIED TOLERANCES
DATE	REVISED	APPROVED				

XKLB

DSND		SCALE: N/A	MODEL TYPE: 2.54mm BTB Connector
DWN		VIEW:	PART NO.: X6522WW-2xXXH-C60D30-E80
CHKD		UNIT: mm/in	DWG NO.: X-X6522WW-2xXXH-C60D30-E80
APPD		SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT
			SHEET
			REVISION
			1/1
			A0