


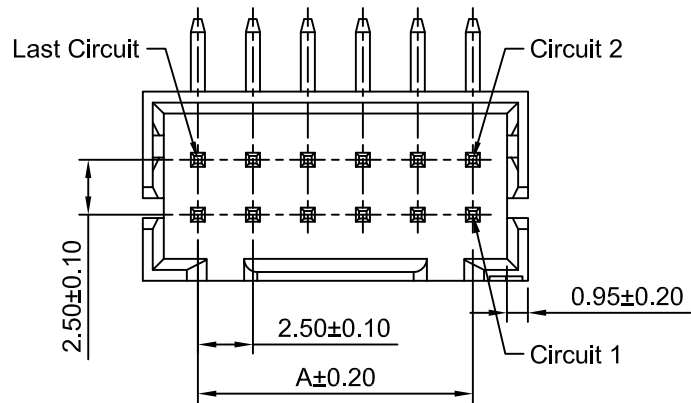

Ordering Information:

A2508WRA-2xXP - ***
1 2

1.Part NO.

2.Finish:

(Blank): Tin over Nickel


G: Gold over Nickel(Au:1u")

G3: Gold over Nickel(Au:3u")

3.Packing:

(Blank):Bag

TR:Tray



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.




Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel


Material: Nylon 66,UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2508WRA-2x2P	2.50	7.50
A2508WRA-2x3P	5.00	10.00
A2508WRA-2x4P	7.50	12.50
A2508WRA-2x5P	10.00	15.00
A2508WRA-2x6P	12.50	17.50
A2508WRA-2x7P	15.00	20.00
A2508WRA-2x8P	17.50	22.50
A2508WRA-2x9P	20.00	25.00
A2508WRA-2x10P	22.50	27.50
A2508WRA-2x11P	25.00	30.00
A2508WRA-2x12P	27.50	32.50
A2508WRA-2x13P	30.00	35.00
A2508WRA-2x14P	32.50	37.50
A2508WRA-2x15P	35.00	40.00
A2508WRA-2x16P	37.50	42.50
A2508WRA-2x17P	40.00	45.00
A2508WRA-2x18P	42.50	47.50
A2508WRA-2x19P	45.00	50.00
A2508WRA-2x20P	47.50	52.50

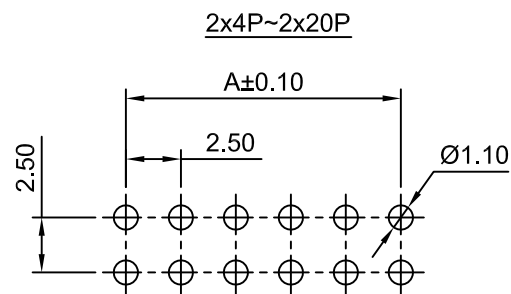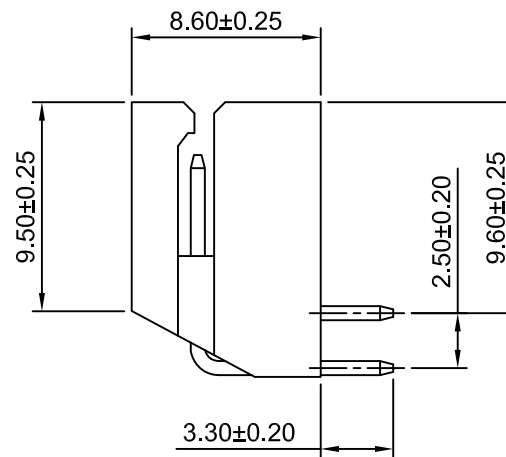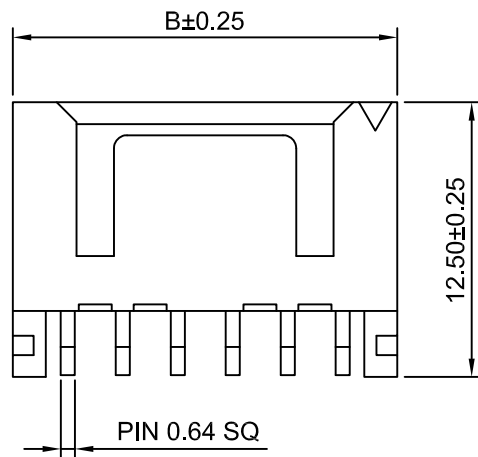

P.C.B LAYOUT
TOLERANCE:±0.05



2x2P~2x3P

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1	2.50mm Pitch Right angle Dual Row Wafer		
DRAWN	CHK'D	APPR			
Haisen Li	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2508WRA-2xXP		REV A1
x,x.x±0.25					
x,x.x±0.20					
x,xxx±0.15					
ANGLES ±1°					