

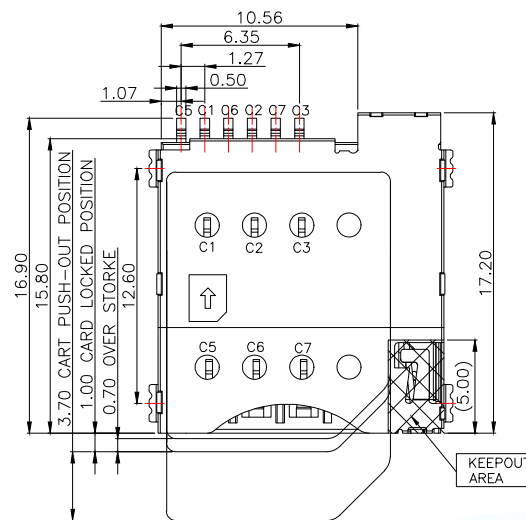
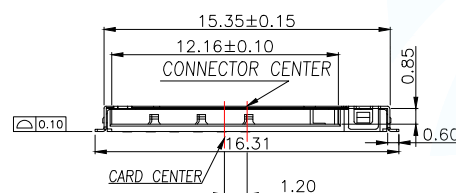
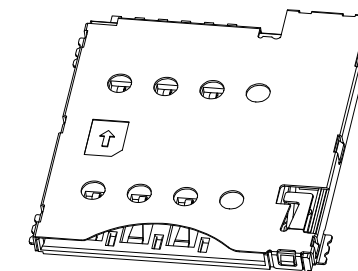


对插口处塑胶翘曲务必控制在0.15以内

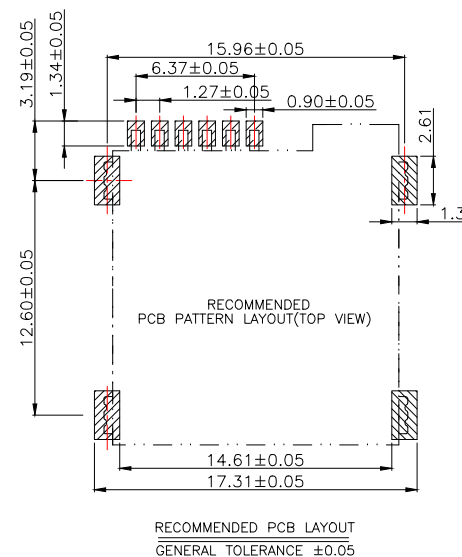

C8	RESERVED
C7	I/O
C6	VPP
C5	GND
C4	RESERVED
C3	CLK
C2	RST
C1	VCC
PIN NO.	PIN NAME


- NOTES:
- MATERIAL:
INSULATOR: HIGH TEMPERATURE THERMOPLASTIC, UL 94V-0
CONTACT: COPPER ALLOY
SHELL: SUS
 - ELECTRICAL CHARACTERISTICS:
2-1. CURRENT RATING: 0.5 Amp. MAX.
2-2. VOLTAGE: 100V DC. MAX.
2-3. LOW LEVEL CONTACT RESISTANCE: 100 mOhms MAX. INITIALLY.
2-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN. FOR 1 MINUTE.
2-5. INSULATION RESISTANCE: (INITIAL) 1000MOhms MIN., (FINAL) 100MOhms MIN.
BY APPLYING 500V DC ON MATED AND UNMATED CONNECTORS THROUGH MIL-STD-202, METHOD 302.
 - MECHANICAL CHARACTERISTICS:
3-1. DURABILITY: 5000 CYCLES.
3-2. OPERATING TEMP. RANGE: -25°C TO +85°C.
[INCLUDING TERMINAL TEMP. RISE]
3-3. STORAGE TEMP.: -40°C TO 85°C.
 - DIMENSIONS MARKED ∇ ARE MAJOR CHECKED DIMENSIONS.
 - HARMFUL MATERIAL CONTROL PLEASE FOLLOW DOC. NO. "EPI12".
 - QUANTITY OF PRODUCTS: 1000PCS/REEL
 - Salt spray time 24H

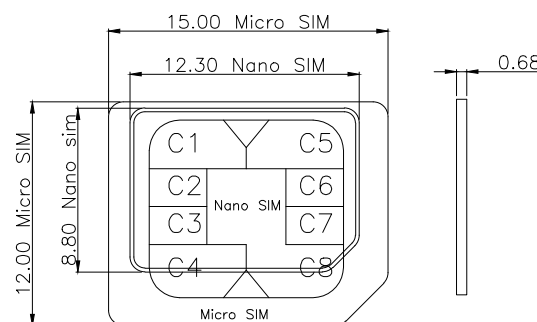


MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: MICRO SIM CARD PUSH 6PIN H1.35	
DECIMALS:		PAR	SMC-202S-ARP6
ANGLES:		DWN	
X: ±0.50	X': ±2°	CHKD	
.X: ±0.30	.X': ±1°	APVD	
.XX: ±0.20	.XX': ±0.5°	SCALE: 1:1	UNIT: MM
CUSTOMER COPY		SIZE: A4	SHEET: 1F1
			REV: A

NOTES

1. NUMBER OF CONNECTORS:1000PCS/REEL
2. LEAD TAPE LENGTH

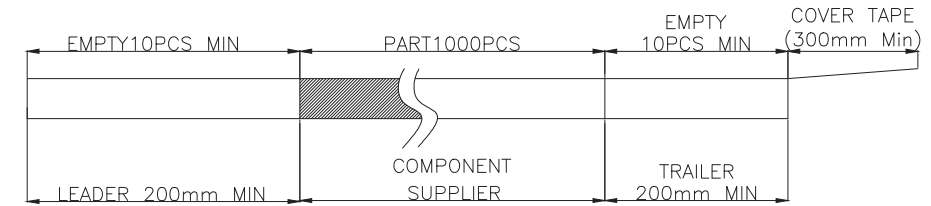

3. QUANTITY:10000PCS/CARTON

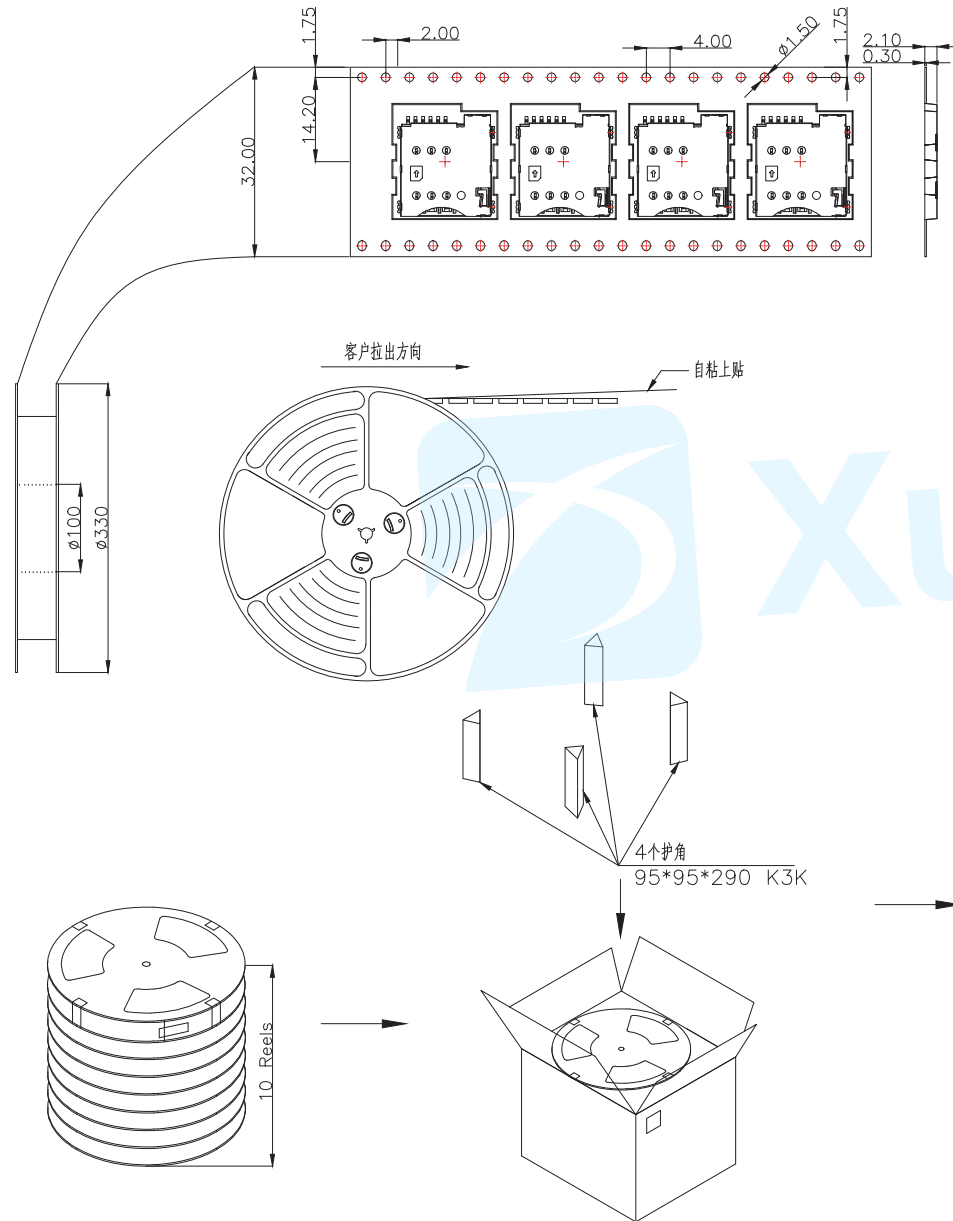

上下各1PCS珍珠棉

胶纸工字型封箱

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd			
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:MICRO SIM CARD PUSH PUSH 6PIN H1.35 包装		
			PAR	SMC-202S-ARP6	
DECIMALS:	ANGLES:		DWN		
X:±0.50	X':±2°		CHKD		
.X:±0.30	.X':±1°		APVD		
.XX:±0.20	.XX':±0.5°	CUSTOMER COPY	SCALE 1:1	UNIT:MM	
			SIZE:A4	SHEET:1F1	REV:A