

# SOFT-SHIELD® 4850

## Electrically Conductive Foam EMI Shielding Gaskets

Parker Chomerics SOFT-SHIELD® 4850 is a true multi-planar, Z-axis electrically conductive foam for indoor applications. It is based on the unique integration of electrically conductive silver-plated nylon fibers into a low-density urethane foam, providing for a performance-driven, cost-effective EMI shielding solution.

Through the optimization of conductive fiber construction, loading and dispersion within the foam matrix, SOFT-SHIELD 4850 provides excellent Z-axis electrical conductivity with extremely short ground paths.


SOFT-SHIELD 4850 has a UL 94 V-0 flammability rating and is available in configurations such as bulk rolls, cut sheets, strip gaskets or custom die cut shapes. A uniform silver-plated copper particle filled, electrically conductive acrylic pressure sensitive adhesive (PSA) is available on one side for ease of assembly.

### Product Features

- 95 dB typical shielding effectiveness from 20 MHz to 10 GHz
- Z-axis electrical conductivity
- Excellent through resistance (<60 milliohms at 30% gasket deflection with pressure-sensitive adhesive)
- Low closure force
- Stable electrical performance (through resistance) after multiple closure cycles
- Low compression set <15%
- Available in bulk rolls, cut sheets or custom die cut shapes
- Non-nickel bearing material

### Typical Applications

- Telecom Infrastructure rack and enclosure components
- Servers and desktop PCs
- I/O panels, backplanes, connectors, access panels and rectangular/square strip gasket seals
- LCD/PDP large screen TVs
- Indoor electronics applications requiring UL94 V-0 flammability rating

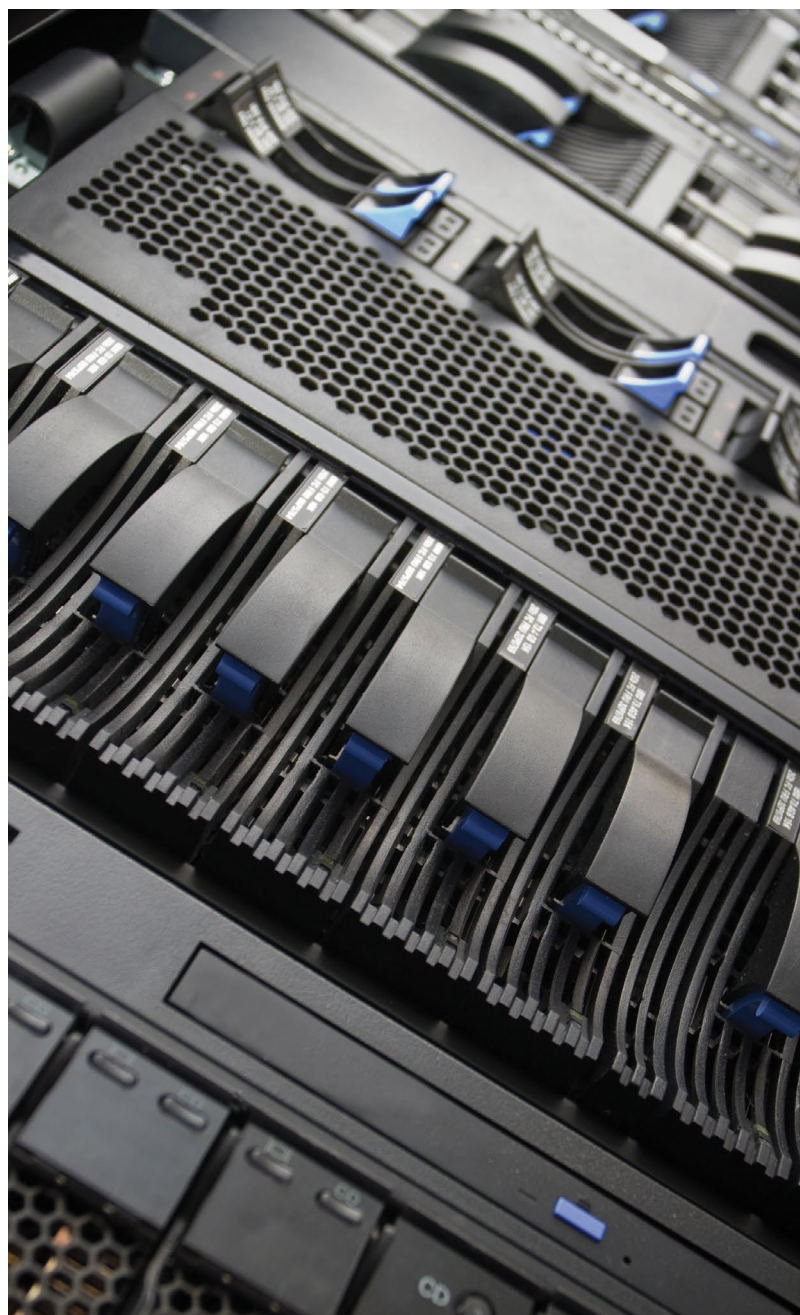

# SOFT-SHIELD® 4850 PRODUCT INFORMATION

Typical Properties	SOFT-SHIELD® 4850	Test Method
Shielding Effectiveness – 20 MHz to 10 GHz, dB	95	CHO-TM-TP08
Compression-Deflection – 3 mm thick sample, psi (kPa)	25% - 2.5 (17.2) 50% - 4.3 (29.6)	ASTM C165 (Modified)
Through-Resistance	(See Figure 1)	ASTM D991
Gasket Compression Set, %	<15	ASTM D3574
Tensile Strength – 3 mm thick sample, psi (MPa)	306 (2.1)	ASTM D412 (Modified)
Electrically Conductive Acrylic PSA Peel Strength, oz/in	15	ASTM D1000 (Modified to 90° peel)
Recommended % Deflection Range, %	15 - 50	--
Flammability (See UL File Number E140244)	V-0	UL 94
NASA Outgassing, % TML (% CVCM)	7.20 (4.35)	ASTM E595
Operating Temperature °F (°C)	-40 to <b>158</b> (-40 to <b>70</b> )	--
Recommended Storage Conditions @ 50% Relative Humidity °F (°C)	21 ± 10 (70 ± 20)	--
Shelf Life with PSA, months from date of shipment	24*	--
Shelf Life (no adhesive)	Indefinite	--

\* Possible extension of additional twelve (12) months. [See Parker Chomerics Shelf Life Re-certification for Laminated Solutions document for procedure.](#)

## Dimensional Tolerances

### Minimum Wall Width for Steel-Rule Die cut parts, inches (mm), 0.100 (2.54)

Overall Die-Cut inches (mm)



Up to 10.00 (up to 254) ±0.020 (0.51)

10.01 to 20.00 (254.3 to 508) ±0.030 (0.76)

20.01 to 30.00 (508.3 to 762) ±0.040 (1.02)


Over 30.00 (over 762) ±0.060 (1.52)

All thicknesses are toleranced at ± 0.5mm (± .020")

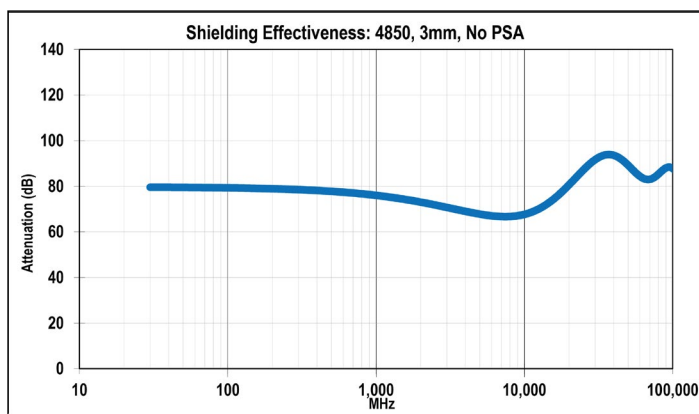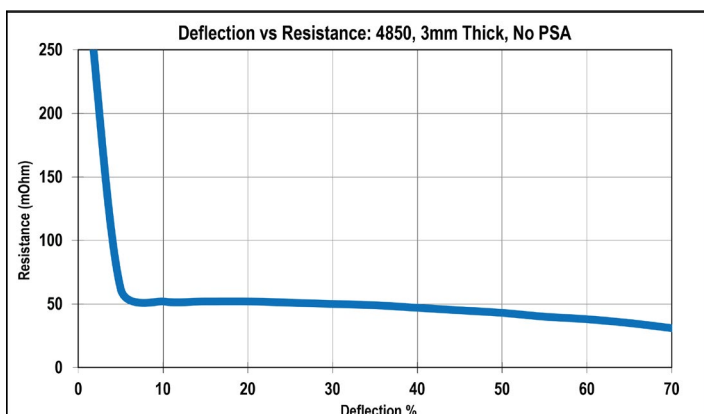


# SOFT-SHIELD® 4850 ORDERING INFORMATION

## Part Numbering – 50 ft long bulk rolls and sheets

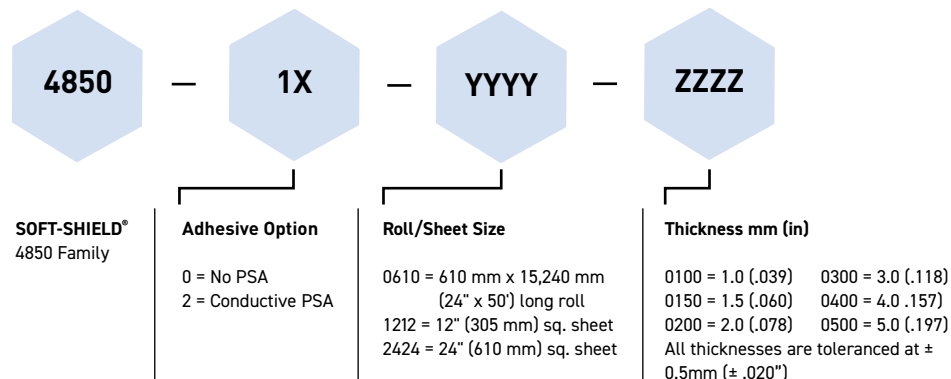


For custom die-cut parts, contact Parker Chomerics Inside Sales.

## Part Numbering – Strip Gaskets

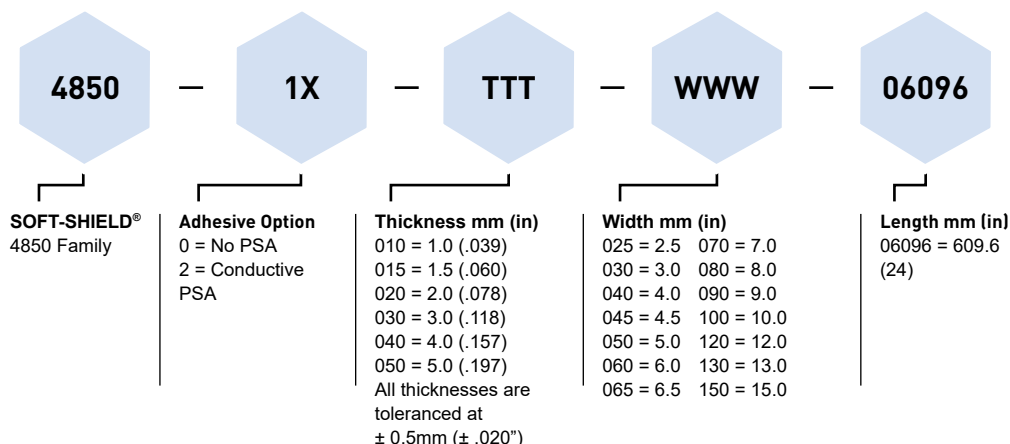

## Custom Part Numbering

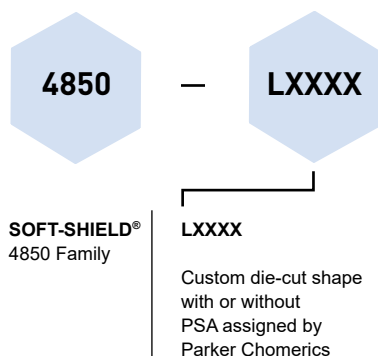

Parker Hannifin Corporation  
**Chomerics Division**  
77 Dragon Court  
Woburn, MA 01801  
Phone 781 935 4850  
Fax 781 933 4318  
chomailbox@parker.com  
[parker.com/chomerics](http://parker.com/chomerics)



## We're Here to Help

Scan QR code or visit [parker.com/chomerics](http://parker.com/chomerics) to:

- [Request a Free Sample](#)
- [Talk to an Expert](#)
- [Get a Quote](#)
- [Find Where to Buy](#)

CHODS1056 July 2024

©2024 Parker Hannifin Corporation

