




- excellent power handling
- small size
- 7 sections
- temperature stable
- LTCC construction , and has good moisture resistance, corrosion resistance, high reliability.

- harmonic rejection
- VHF/UHF transmitters/receivers
- Base Station of Mobile Communication, lab use.

Parameter		Frequency(MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	DC-2800	-	-	1.2	dB
	Freq. Cut-Off	3230	-	3.0	-	dB
	VSWR	DC-2800	-	1.2	-	:1
Stop Band	Rejection Loss	4000	25	-	-	dB
		4200-7400	-	30	-	dB
		9000	-	25	-	dB
		4000-9000	-	20	-	:1

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1	0.02	1.00
500	0.12	1.05
1300	0.24	1.12
2100	0.40	1.12
2800	0.82	1.21
3150	1.89	1.49
3775	37.14	26.51
3900	43.66	30.54
4400	41.49	41.61
5600	37.83	58.97
6400	25.25	58.88
6800	35.69	57.21
7800	40.21	52.07
8400	44.70	49.62
9000	48.60	46.50

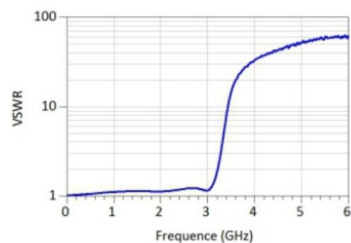

NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350 WITH THICKNESS $0.008" \pm .0015"$.
COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.



2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	10W max. at 25°C

RF IN	1
RF OUT	3
GROUND	2,4



A	3.20	B	1.60	C	0.95
D	0.51	E	0.81	F	0.23
G	4.29	H	2.21	J	0.61
K	3.10	L	0.61	M	2.21
N	0.30	P	1.80	wt	0.02g

Tel : +86 0755-27881106
Fax : +86 0755-27597069
Add : 806 Building B7, Tianrui Industrial Park, Fuyong Street, Baoan District, Shenzhen

JY-LFCN-2850+