


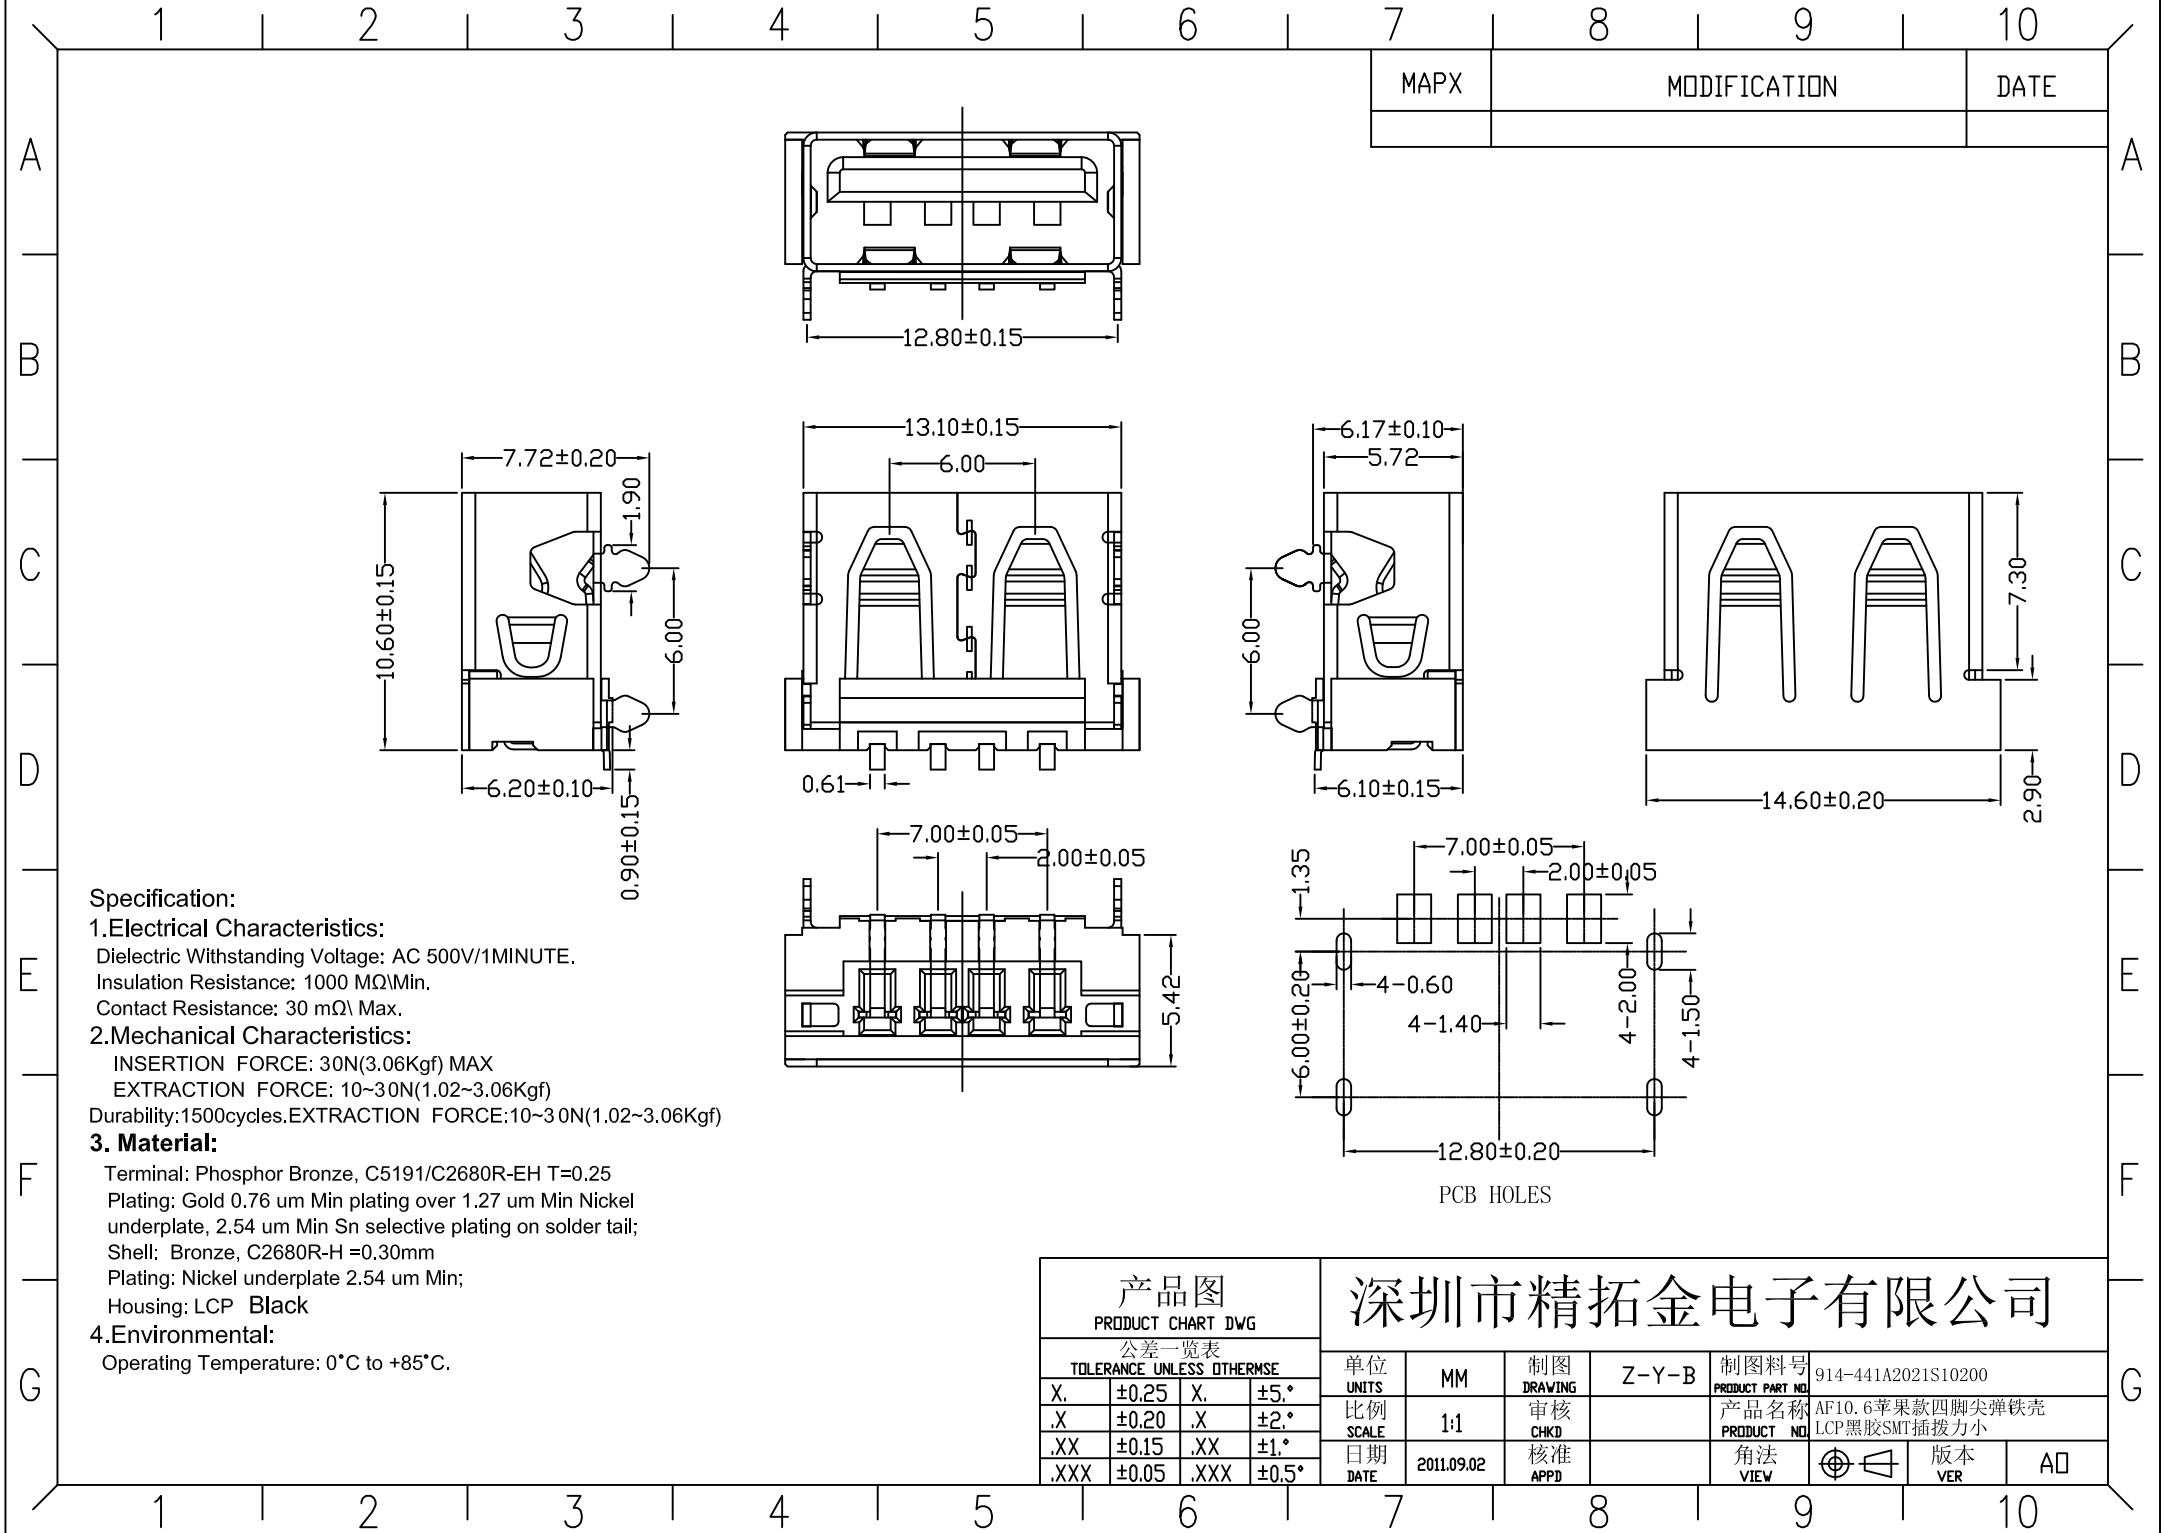

Specification:

1.Electrical Characteristics:

Dielectric Withstanding Voltage: AC 500V/1MINUTE.

Insulation Resistance: 1000 MΩ/Min.

Contact Resistance: 30 mΩ Max.

2.Mechanical Characteristics:

INSERTION FORCE: 30N(3.06Kgf) MAX

EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)

Durability:1500cycles.EXTRACTION FORCE:10~30N(1.02~3.06Kgf)

3. Material:

Terminal: Phosphor Bronze, C5191/C2680R-EH T=0.25

Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;

Shell: Bronze, C2680R-H =0.30mm

Plating: Nickel underplate 2.54 um Min;

Housing: LCP Black

4.Environmental:

Operating Temperature: 0°C to +85°C.

产品图				深圳市精拓金电子有限公司					
PRODUCT CHART DWG									
公差一览表				单位	MM	制图	Z-Y-B	制图料号	914-441A2021S10200
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING		PRODUCT PART NO.	
X.	±0.25	X.	±5.°	比例	1:1	审核		产品名称	AF10.6苹果款四脚尖弹铁壳
.X	±0.20	.X	±2.°	SCALE		CHKD		PRODUCT NO.	LCP黑胶SMT插拔力小
.XX	±0.15	.XX	±1.°	日期	2011.09.02	核准		角法	
.XXX	±0.05	.XXX	±0.5°	DATE		APPD		VIEW	
								版本	AD
								VER	