



Power Key 5.0

TE Internal #: 3-1376382-4


Header, Receptacle, Wire-to-Board, 2 Position, 5 mm [.197 in]

Centerline, Printed Circuit Board, UL 94V-0, Power Key 5.0,

Rectangular Power Connectors

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > STD Temp Power Key Header

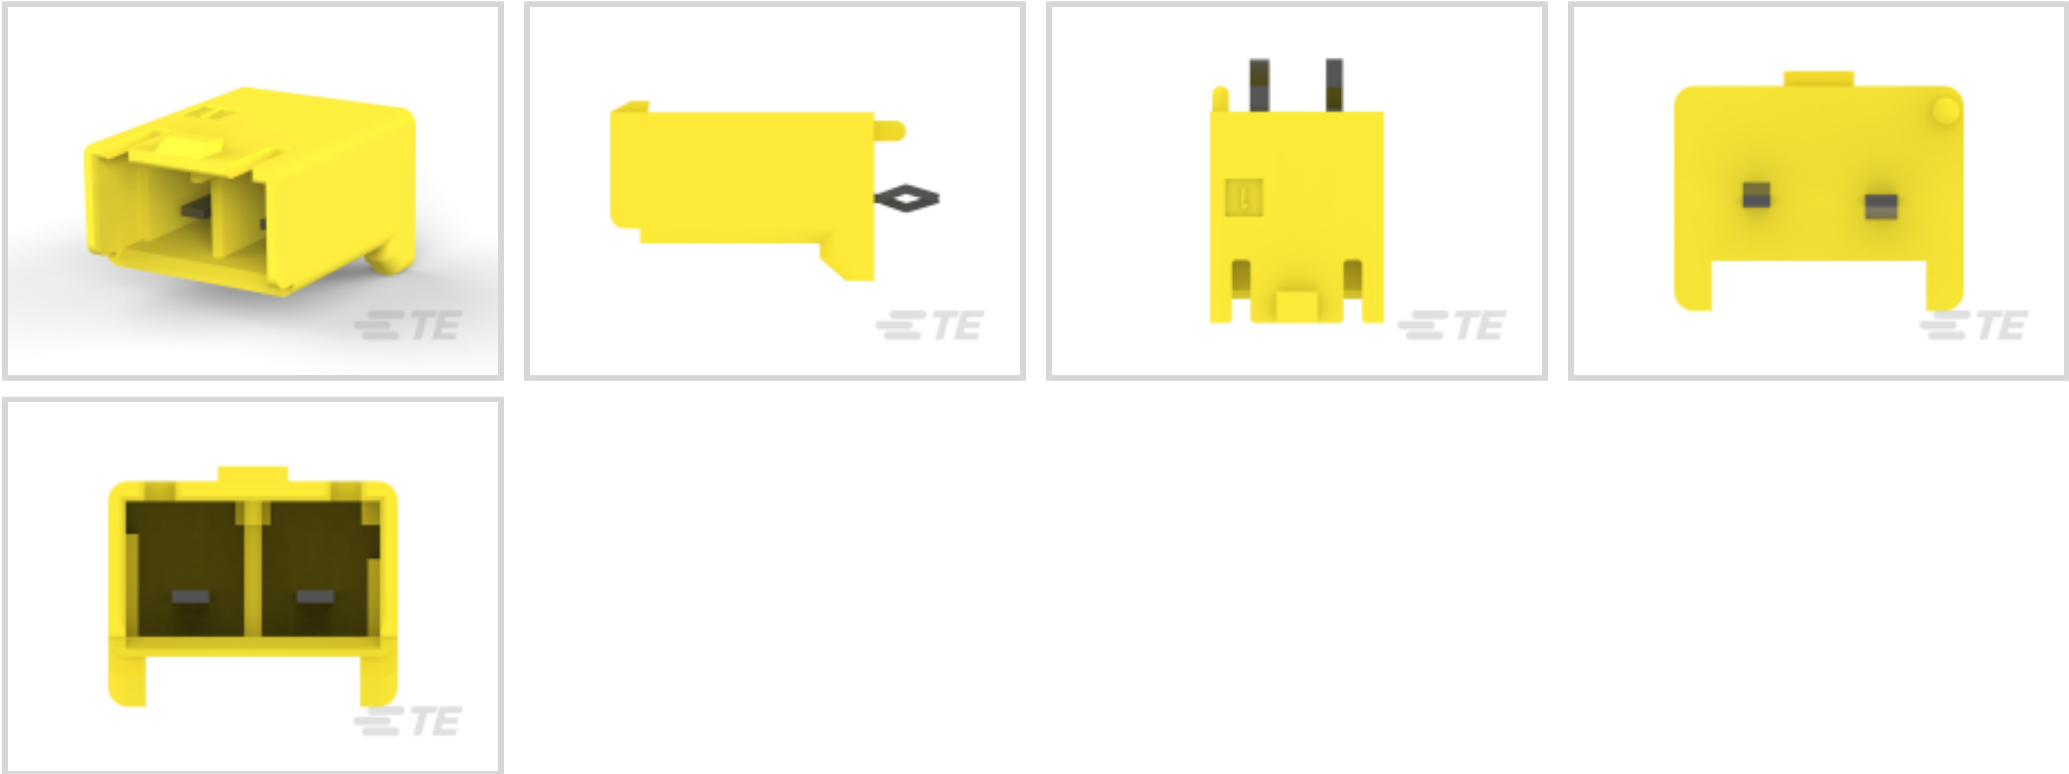

Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Board**

Number of Positions: **2**

Centerline (Pitch): **5 mm [.197 in]**

[All STD Temp Power Key Header \(18\)](#)

Features

Product Type Features

Header Type	Fully Shrouded
Rectangular Power Connector Type	Header
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	2
PCB Mount Orientation	Vertical
Number of Power Positions	2
Number of Rows	1

Electrical Characteristics

--	--



Operating Voltage	300 VAC
-------------------	---------

Contact Features

Mating Post Length	6.3 mm[.248 in]
PCB Contact Termination Area Plating Material Thickness	2 µm[78.74 µin]
Contact Layout	Inline
Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	10 A
Contact Retention Within Housing	Without
Contact Type	Tab
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	39.36 µm[1 µin]

Termination Features

Termination Post & Tail Length	3.05 mm[.12 in]
Termination Method to PCB	Through Hole - Press-Fit

Mechanical Attachment

Mating Retention	With
Mating Alignment	Without
PCB Mount Alignment	Without
PCB Mount Retention	With
PCB Mount Retention Type	Mounting Post/Kinked Legs
Mating Retention Type	Latch
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	5 mm[.197 in]
Housing Color	Yellow
Housing Material	Nylon 6/6 GF

Dimensions

Connector Height	14.1 mm[.55 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
Product Width	14.1 mm[.555 in]



Product Length	11.6 mm[.456 in]
----------------	------------------

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

CSA Rating	LR 7189
UL Rating	Recognized
Compatible With Agency/Standards Products	CSA, UL
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity	100
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 1376394-1
5MM POWER KEY D/L PLATE GREEN



TE Part # 3-1376388-4
5MM POWER KEY 2P PLUG HSG YELL

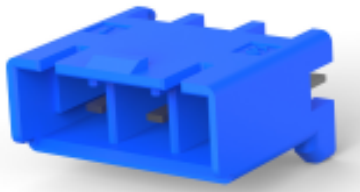


TE Part # 7-1376383-3
5mm B-T-W Conn, HDR HSG BLUE W



TE Part # 1376382-5
5mm B-T-W Conn. 2P HDR ASSEMBLY (GWT)



TE Part # 5-1376386-1
5.0 POWER KEY CONNECTOR 4P (2R)

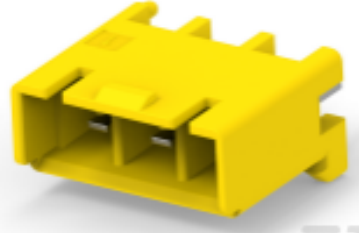

TE Part # 8-1376383-4
5mm POWER KEY 3P HDR ASSY YELL

Also in the Series | Power Key 5.0




Connector Contacts(4)



Connector Hardware(4)



Insertion & Extraction Tools(1)

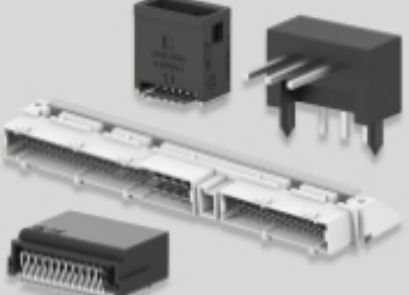

PCB Headers & Receptacles(20)



Rectangular Power Connectors(119)

Customers Also Bought



TE Part #1376382-1 5mm B-T-W Conn. 2P HDR ASSEMBL	TE Part #179839-1 AMP POWER D/LOCK T/HDR ASSY 3P	TE Part #917728-1 2.5 SIGNAL D/LOCK HDR ASSY 8P	TE Part #1-1123724-2 3.96EP HDR ASSY 2(3)P NATURAL
TE Part #1376385-1 5mm B-T-W Conn. 6P HDR ASSEMBL	TE Part #917725-1 2.5 SIGNAL D/LOCK HDR ASSY 5P	TE Part #917722-1 2.5 SIGNAL D/LOCK HDR ASSY 2P	TE Part #2-1623930-1 CFR25 5% 15R
TE Part #2358709-1 250 FASTON,TAB,TAPING AND REEL ASSY	TE Part #3-1971798-4 NEW GI CONN2.5 HDR ASMBLY 3P YLW D1.0		

Documents

Product Drawings

5mm B-T-W Conn. 2P HDR ASSEMBL

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-1376382-4_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-1376382-4_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-1376382-4_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



SOFT_SHELL_PIN_SOCKET_CONNECTORS_STANDARD_DENSITY

English

1-1773881-9 Power Key Connector Quick Reference Guide

English

Product Specifications

Application Specification

English

Agency Approvals

VDE Certificate

English

VDE Certificate

English