
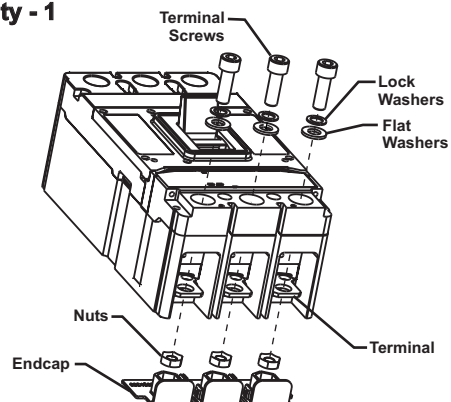


EAT•N

Cutler-Hammer

**Circuit Breaker
Accessory****For L-Frame**Cutler-Hammer Business
Pittsburgh, PA.

IC01207001EH01

3 Pole End Cap Kit**Cat. Number - L3RTWK****Style No. - 66A4562G05****Quantity - 1**

1 07 82116 15741 6

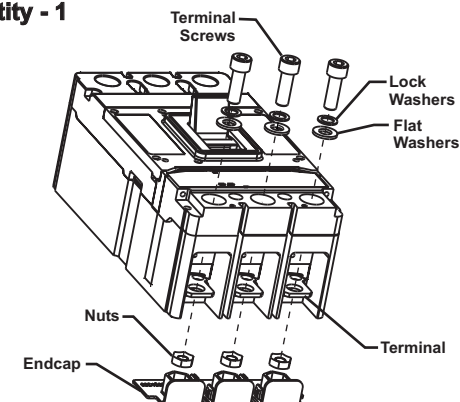
Disconnect Voltage and Trip breaker.

To Install, slide Endcap and Nuts onto breaker base.
Mount breaker to panel.Place Wire Terminations on top of breaker Terminals.
Insert Terminal Screws through washers in order
shown, and torque screws to 275 Lbs-in (31 N-m).**EAT•N**

Cutler-Hammer

**Circuit Breaker
Accessory****For L-Frame**Cutler-Hammer Business
Pittsburgh, PA.

IC01207001EH01

3 Pole End Cap Kit**Cat. Number - L3RTWK****Style No. - 66A4562G05****Quantity - 1**

1 07 82116 15741 6

Disconnect Voltage and Trip breaker.

To Install, slide Endcap and Nuts onto breaker base.
Mount breaker to panel.Place Wire Terminations on top of breaker Terminals.
Insert Terminal Screws through washers in order
shown, and torque screws to 275 Lbs-in (31 N-m).


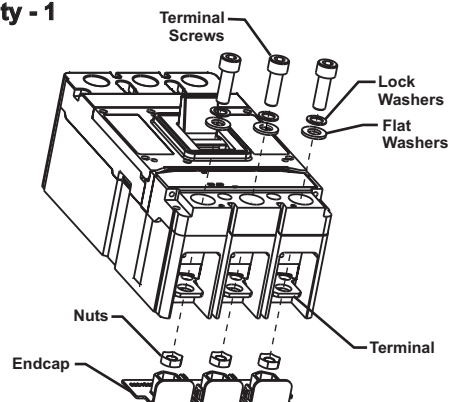
ECN # KL-1158 IC01207001EH01

EAT•N

Cutler-Hammer

**Circuit Breaker
Accessory****For L-Frame**Cutler-Hammer Business
Pittsburgh, PA.

IC01207001EH01

3 Pole End Cap Kit**Cat. Number - L3RTWK****Style No. - 66A4562G05****Quantity - 1**

1 07 82116 15741 6

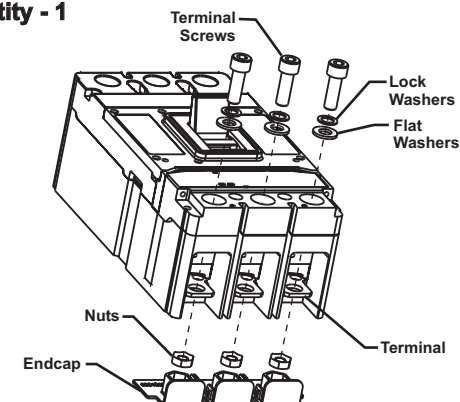
Disconnect Voltage and Trip breaker.

To Install, slide Endcap and Nuts onto breaker base.
Mount breaker to panel.Place Wire Terminations on top of breaker Terminals.
Insert Terminal Screws through washers in order
shown, and torque screws to 275 Lbs-in (31 N-m).**EAT•N**

Cutler-Hammer

**Circuit Breaker
Accessory****For L-Frame**Cutler-Hammer Business
Pittsburgh, PA.

IC01207001EH01

3 Pole End Cap Kit**Cat. Number - L3RTWK****Style No. - 66A4562G05****Quantity - 1**

1 07 82116 15741 6

Disconnect Voltage and Trip breaker.

To Install, slide Endcap and Nuts onto breaker base.
Mount breaker to panel.Place Wire Terminations on top of breaker Terminals.
Insert Terminal Screws through washers in order
shown, and torque screws to 275 Lbs-in (31 N-m).