

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

1 Electrical


1.1 Impedence	50 Ω
1.2 Frequency	DC~6GHz
1.3 Dielectric withstanding voltage	1000V(volts RMS)
1.4 Center contact resistance	$\leq 3M\Omega$
1.5 Outer contact resistance	$\leq 2M\Omega$
1.6 Insulation resistance:	$\geq 5000M\Omega$

2 Environmental&Mechanical

2.1 Temperature range	-40℃~+85℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

3 Materials&plating

3.1 Body:	Brass; gold plated
3.2 Insulator:	Teflon
3.3 Contact Pin:	Brass, Gold plated
3.4 Nut:	Brass, gold plated
3.5 Gasket:	Silicon Rubber (red color)
3.6 Ferrule:	Copper, Nickel plated

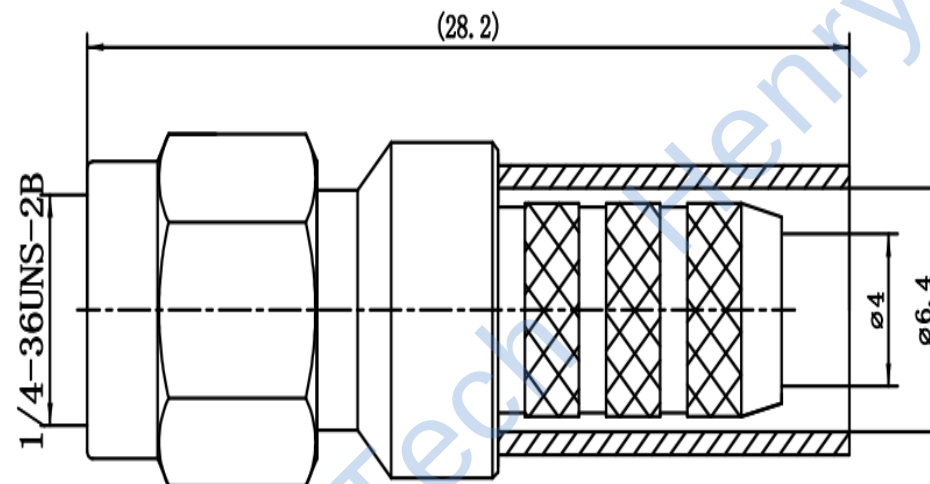

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ± 0.50
.X ± 0.20
.XX ± 0.10
ANGLES $\pm 1^\circ$

TITLE:
RF Coaxial Connector
SMA Male Conn. for
LMR240 Cable

PART NO: HL-SMA-J240B



SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------