


Mini-SAS External HD Cable - SFF-8644 to SFF-8644, 12 Gbps, 1M (3.28 ft.)

MODEL NUMBER: **S528-01M**

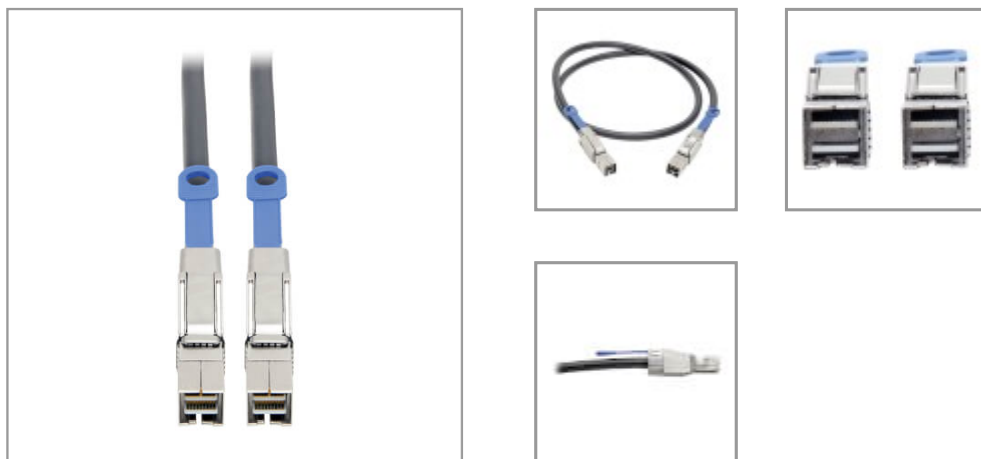

High-performance mini-SAS external HD cable connects two storage devices with external SFF-8644 connectors.

Features

High-Performance Mini-SAS External HD Cable for Connecting SAN Devices This four-channel InfiniBand cable connects two storage devices with external mini-SAS HD SFF-8644 connectors, such as 12G RAID controllers, SATA hard drives, enclosures and JBOD devices. It supports data transfer rates up to 12 Gbps, which is faster than eSATA, USB 3.0 and Thunderbolt cables. The high-density connectors are surrounded by durable die-cast zinc that is compatible with shielded external connectors. Protective caps defend the connectors against dust and damage. Convenient pull-tabs make it easy to disconnect the cable in crowded racks and other applications. The S528-01M is backward compatible with previous SAS versions to ensure compatibility with your devices.

Highlights

- Ideal for connecting storage area network (SAN) devices or hard drives
- Protective caps over die-cast zinc housings shield ends from dust and damage
- Convenient pull tabs make it easier to disconnect cable in crowded racks
- Supports data transfer speeds up to 12 Gbps—faster than eSATA, USB 3.0 and Thunderbolt
- Backward compatible with previous SAS versions for sure compatibility with your device

Applications

- Connect two high-performance JBOD storage devices for the purpose of consolidating and sharing data in a small-to-medium company or organization

System Requirements

- Works with SAN devices, SAS/SATA hard drives and other SAS interface devices with SFF-8644 external connectors

Package Includes

- S528-01M Mini-SAS External HD Cable - SFF-8644 to SFF-8644, 1 m

Specifications

| OVERVIEW | |
|----------------------|--------------|
| UPC Code | 037332222305 |
| Technology | SAS |
| CONNECTIONS | |
| Side A - Connector 1 | SFF-8644 |
| Side B - Connector 1 | SFF-8644 |
| Contact Plating | Gold |
| PHYSICAL | |
| Color | Black |



Powering Business Worldwide

TRIPP LITE
SERIES

| | |
|--------------------------------------|-----------------------------|
| Cable Jacket Color | Black |
| Cable Length (ft.) | 3.28 |
| Cable Length (m) | 1.00 |
| Unit Dimensions (hwd / in.) | 5.315 x 3.937 x 0.500 |
| ENVIRONMENTAL | |
| Operating Temperature Range | 32° to 104°F (0° to 40°C) |
| Storage Temperature Range | -4° to 149°F (-20° to 65°C) |
| Operating Humidity Range | 20 ~ 80% |
| Storage Humidity Range | 10 ~ 90% |
| FEATURES & SPECIFICATIONS | |
| IP68 Rated | No |
| IP20 Rated | No |
| STANDARDS & COMPLIANCE | |
| Product Compliance | RoHS |
| WARRANTY & SUPPORT | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |

1000 Eaton Boulevard
Cleveland, OH 44122
United States
<https://tripplite.eaton.com>

© 2024 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.