


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.2.28	阿树

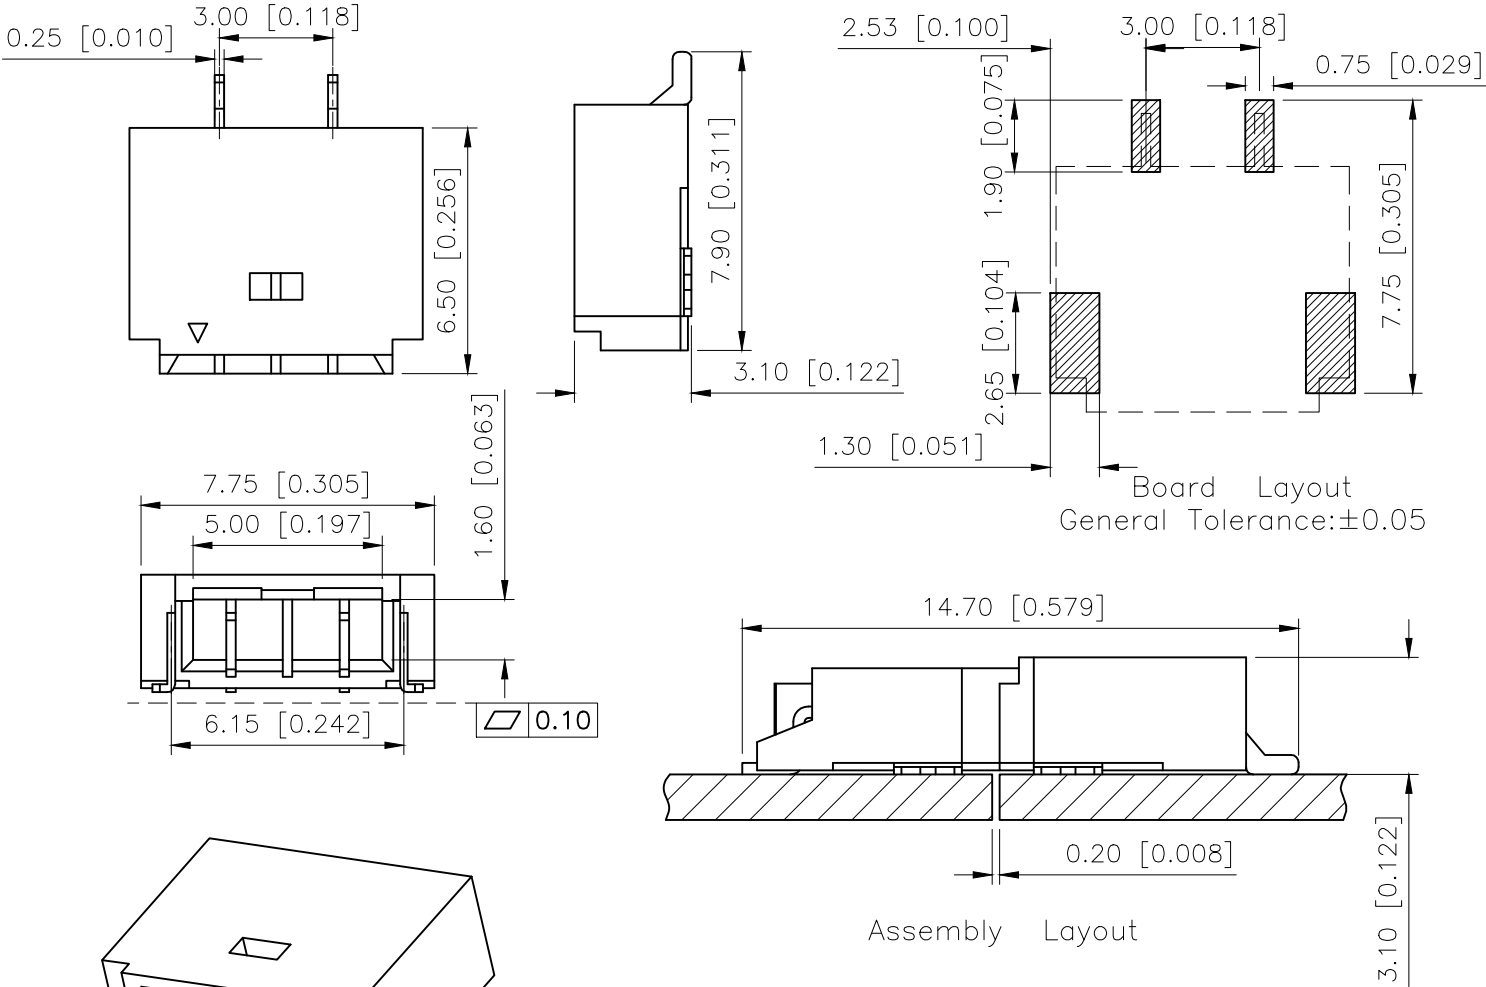

规格 Specifications:
额定电压 Voltage rating:150 V AC/DC
额定电流 Current rating:1A AC/DC
耐电压 Withstanding voltage:1000 V AC/minute
温度区间 Temperature range:-25℃~+105℃
绝缘电阻 Insulation resistance:>1000MΩ
接触电阻 Contact resistance:<20mΩ

PART NO.:
X3000 W F-XX-LP SW
① ② ③ ④ ⑤ ⑥
①Series No
②Category:W-Wafer
③Welding Board Angle:F-Female
④Row No.Pin No:XX-03Pin
⑤Material:LP-LCP 94V-0
⑥Plating Category: SW-Fog Tin plating

X3000WF-02-LPSW	LCP UL 94V-0	Phosphor Bronze	Tin-Plated	Brass	Tin-Plated
PART NO	Material	Material(Pin)	Finish(Pin)	Material(Pin)	Finish (Solder Tab)

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE:	4.00mm BTB Style Connectors
PART NO.:	X3000WF-02-LPSW
DWG NO.:	