
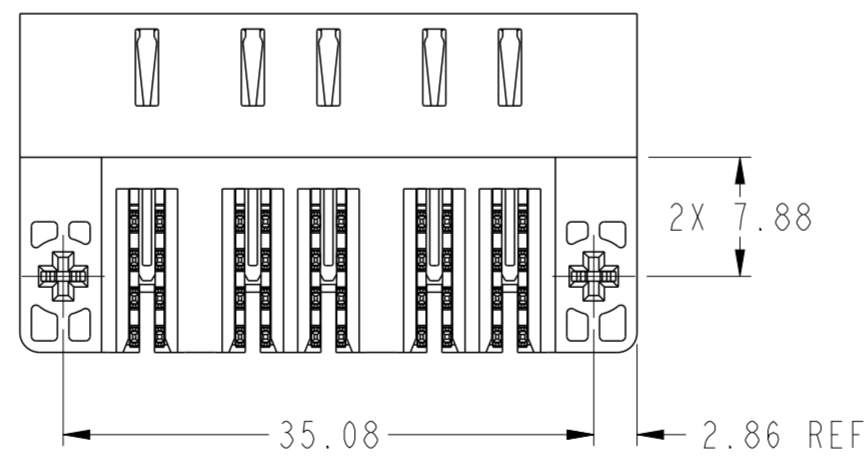
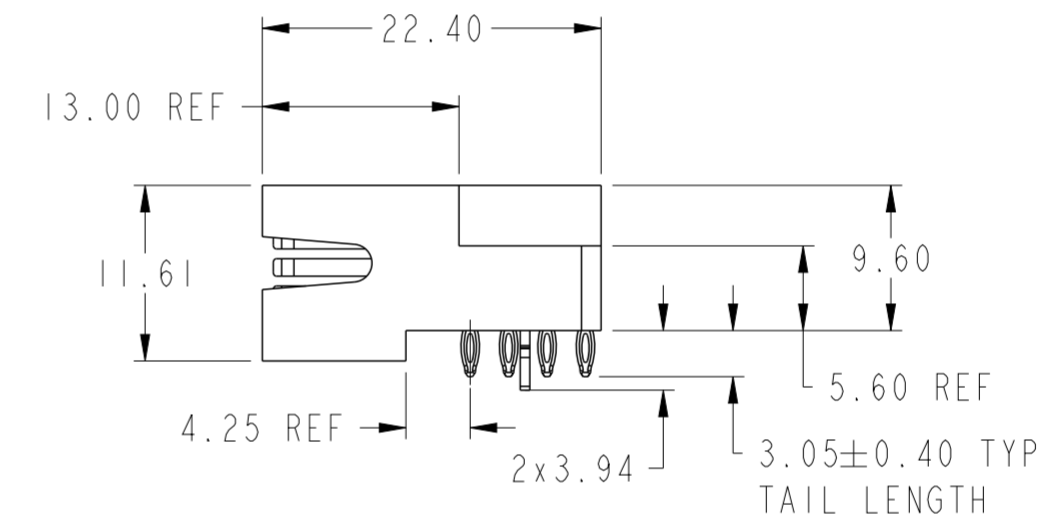
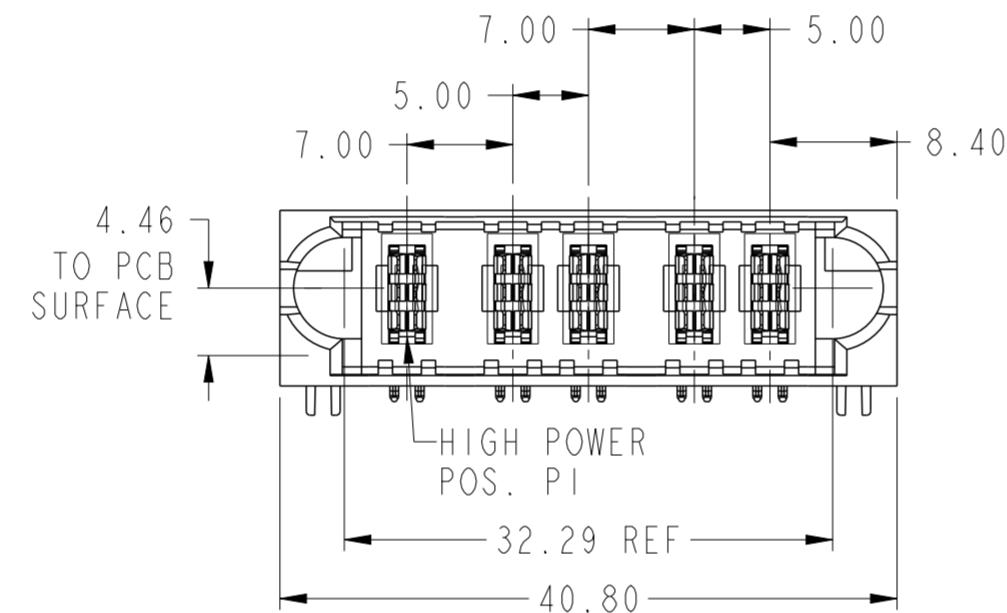


PRODUCT NUMBER  
10127396-02H1000LF

SEE NOTE 1

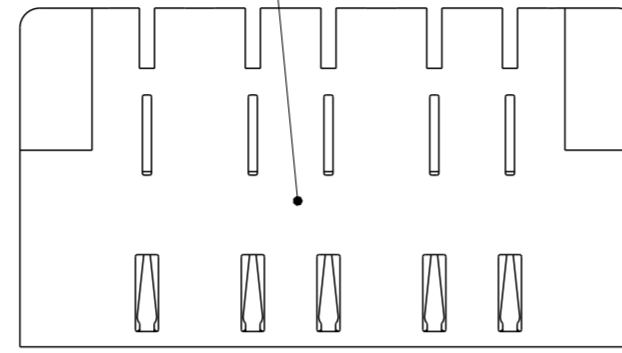

spec ref	-	dr	Kaka Zhang	2015/08/12	projection	mm	size	A2	scale	2:1
tolerance std	ASME Y14.5	eng	De-Ming Lu	2015/12/29		mm	ecn no	-	rel level	Released
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Fancy Zhang	2015/12/29						
surface	ASME Y14.5	appr	Pei-Ming Zheng	2015/12/29	product family	PwrBlade ULTRA	rel level	Released	rev	A
linear	0.X ±0.5 0.XX ±0.25 0.XXX ±0.130			<b>5HP, PRESS-FIT</b> R/A PLUG, PwrBlade ULTRA		cat. no.	-	Product - Customer Drw	sheet 1 of 3	
angular	0° ±2°	www.fci.com		PDS: Rev :A		STATUS:Released		Printed: Dec 30, 2015		

Copyright FCI.  
**FCI**

PRODUCT NO.




ROWS

HIGH POWER

CODE	DESCRIPTION
RP	RIGHT POWER CONTACT
LP	LEFT POWER CONTACT
HA	HOLD DOWN

10127396-02H1000LF

C  
B  
A

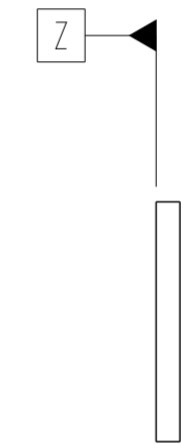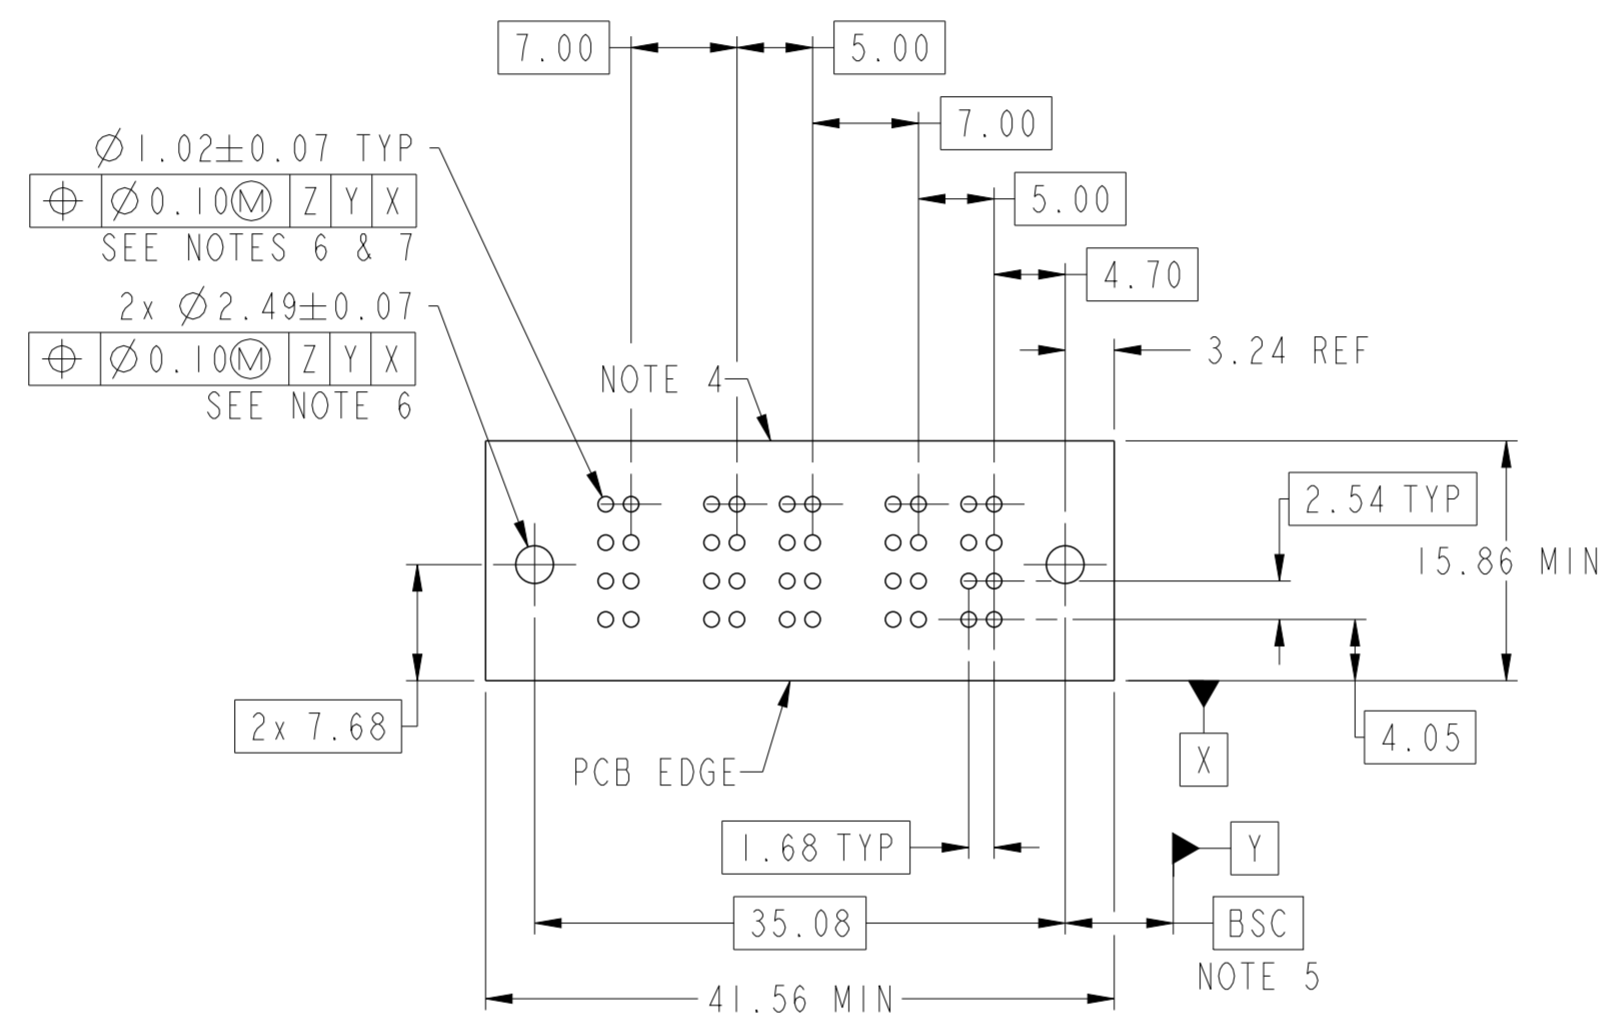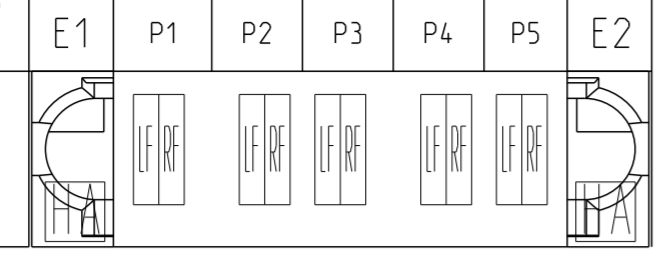

Copyright FCI.

spec ref	-	dr	Kaka Zhang	2015/08/12	projection	mm	size	A2	scale	2:1
tolerance std	ASME Y14.5	eng	De-Ming Lu	2015/12/29		mm	ecn no	-	rel level	Released
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Fancy Zhang	2015/12/29						
surface	ASME Y14.5	appr	Pei-Ming Zheng	2015/12/29	product family	PwrBlade ULTRA	rel level	Released	title	5HP, PRESS-FIT R/A PLUG, PwrBlade ULTRA
linear	0.X ±0.5 0.XX ±0.25 0.XXX ±0.130	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 2 of 3	rev	A	div no	10127396-02H1000
angular	0° ±2°									

PDS: Rev :A

STATUS:Released

Printed: Dec 30, 2015

PRODUCT NUMBER

10127396-02H1000LF

NOTES:

1. "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.  
THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
2. MATERIALS:  
HOUSING: GLASS FILLED WITH HIGH TEMP POLYAMIDE, UL94V-0.  
POWER CONTACTS: COPPER ALLOY.  
SIGNAL CONTACTS: COPPER ALLOY.  
HOLD DOWN: COPPER ALLOY.
3. PLATING SPECIFICATION: FCI 10135186.
4. DENOTES CONNECTOR KEEP OUT ZONE.
5. DATUM AND BASIC DIMENSION ARE ESTABLISHED BY CUSTOMER.
6. ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
7. 1.150±0.025mm DRILLED HOLE PLATED WITH 7.62µm MIN Sn OVER  
25.4µm-76.2µm Cu PLATING TO ACHIEVE A 1.02±0.07mm FINISHED HOLE.
8. PRODUCT SPECIFICATION: FCI GS-12-1176.  
APPLICATION SPECIFICATION: FCI GS-20-0389.  
PRODUCT PACKAGE SPECIFICATION: FCI GS-14-2354.



Copyright FCI.

spec ref	-	dr	Kaka Zhang	2015/08/12	projection	mm	size	A2	scale	2:1
tolerance std	-	eng	De-Ming Lu	2015/12/29			ecn no	-	rel level	Released
ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	chr	Fancy Zhang	2015/12/29						
		appr	Pei-Ming Zheng	2015/12/29						
surface	✓	product family	PwrBlade ULTRA		title	5HP, PRESS-FIT		dwg no	10127396-02H1000	
ASME Y14.5	linear	www.fci.com	cat. no.		R/A PLUG, PwrBlade ULTRA		rev	A		Product - Customer Drw
	angular							sheet 3 of 3		

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[10127396-02H1000LF](#)