

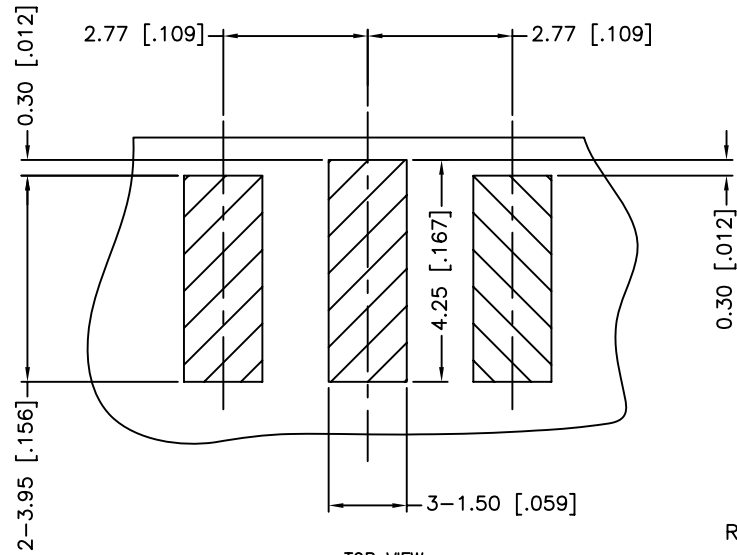
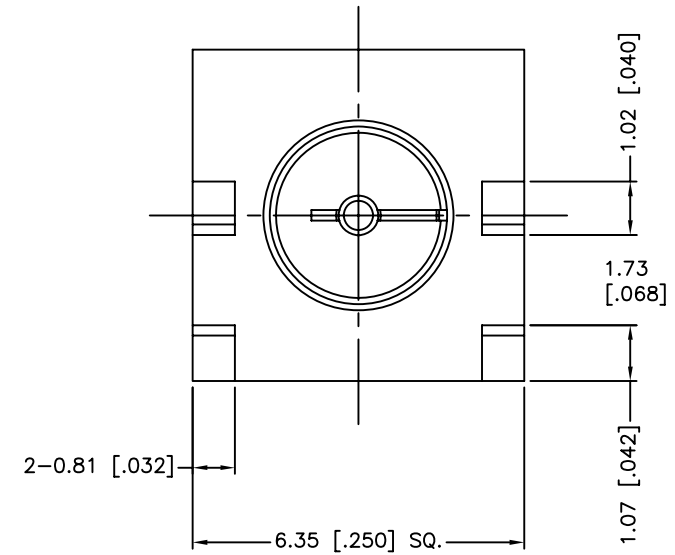


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/08/10	XXXXXX	INITIAL RELEASE

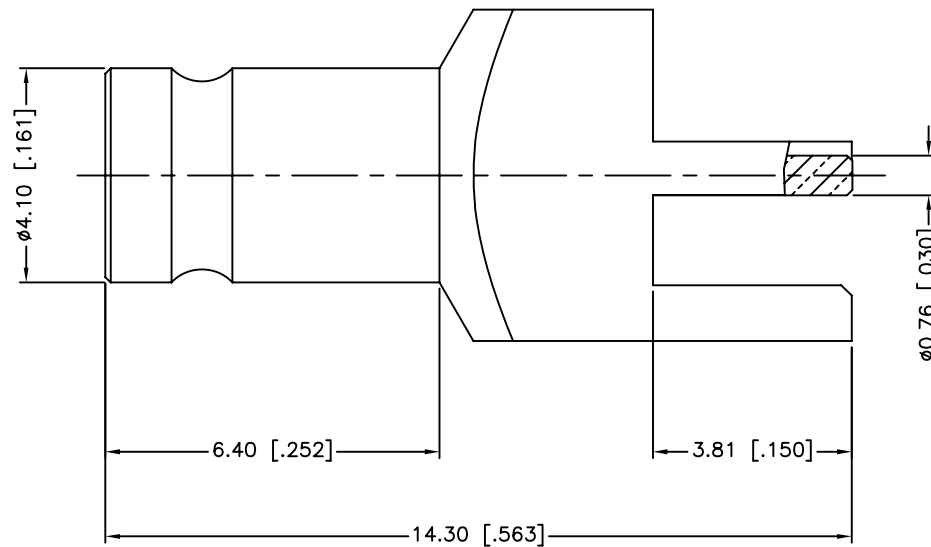

RECOMMENDED PCB LAYOUT

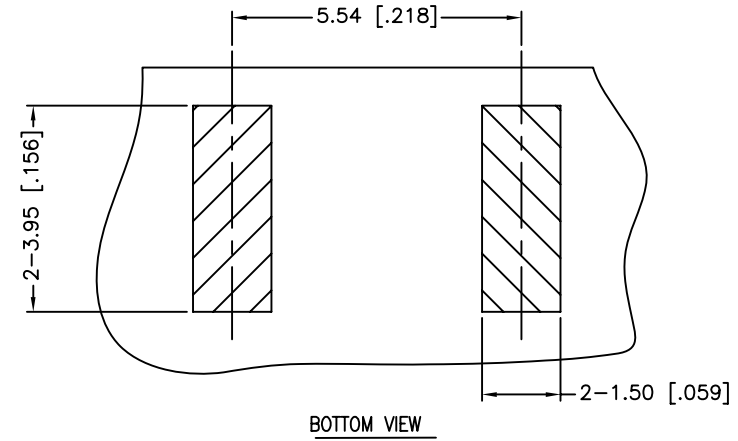

- FREQUENCY RANGE: 0 – 3 GHz
- VSWR (RETURN LOSS): 1.15 MAX.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"				APPROVALS		DATE	Amphenol Connex			
				DRAWN	M.ZHANG	03/08/10				
3	CONTACT PIN	BER. COPPER	GOLD	1	CHECKED		PART DESCRIPTION			
2	INSULATOR	PTFE	NATURAL	1	ISSUED					
1	BODY	BRASS	GOLD	1	SHEET	1 OF 1	1.0/2.3 END LAUNCH RECEPT. JACK – 75 OHM (.062" BOARD THICKNESS)			
DESCRIPTION				MATERIAL	FINISH	QTY	PART NO.			
							282132-75			
							DWG. NO.		282132-75.DWG	REV. NC
							SIZE		A	SCALE NA

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	M.ZHANG	03/08/10
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE		C:/CONNEX/282132-75.DWG

Amphenol Connex			
PART DESCRIPTION			
1.0/2.3 END LAUNCH RECEPT. JACK – 75 OHM (.062" BOARD THICKNESS)			
PART NO.			
282132-75			
DWG. NO.		REV.	SCALE
282132-75.DWG		NC	NA