


REVISIONS					
変更					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	L3	REVISE ECN-22-184920	25NOV	J.J	H.L

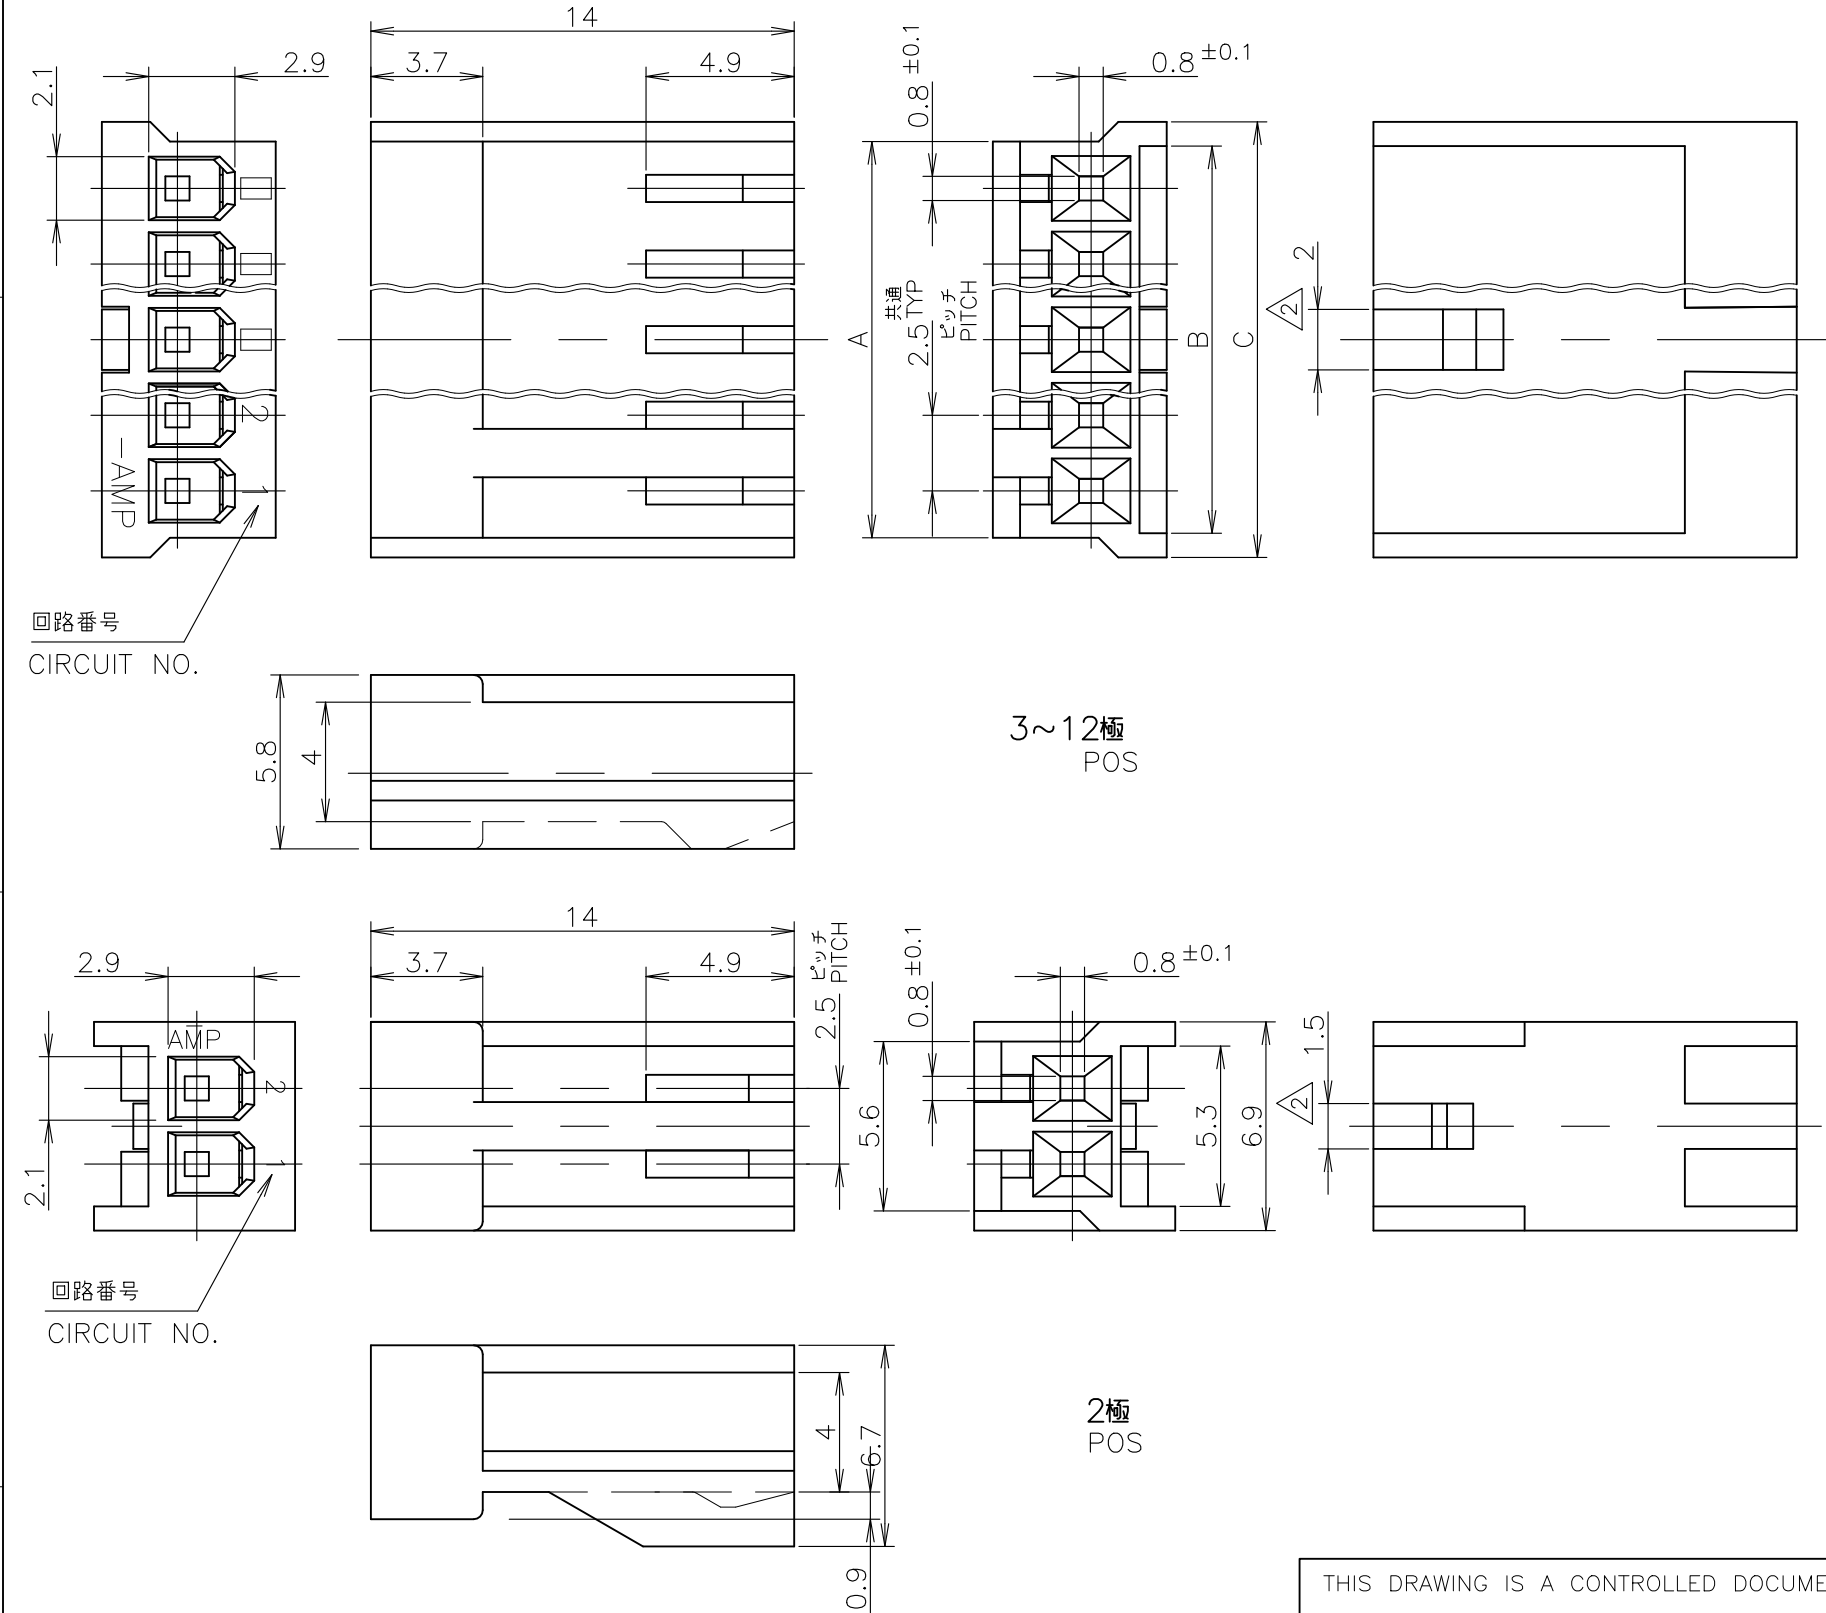

- 1 使用するコンタクトは 170262 又は 170263.
2 ロッキング凸部位置は長手方向の中央。
- 1 CONTACTS, 170262 & 170263 ARE USED.
2 LOCKING PROTRUSION IS PLACED ON THE CENTER OF HOUSING.

OBSOLETE	39.4	37.8	38.1	15		9-171822-5	7-171822-5
	36.9	35.3	35.6	14		9-4	7-4
	34.4	32.8	33.1	13		9-3	7-3
	29.4	27.8	28.1	11		9-1	7-1
	31.9	30.3	30.6	12		9-2	7-2
	26.9	25.3	25.6	10		9-0	7-0
	24.4	22.8	23.1	9		8-9	6-9
	21.9	20.3	20.6	8		8-8	6-8
	19.4	17.8	18.1	7		8-7	6-7
	16.9	15.3	15.6	6		8-6	6-6
	14.4	12.8	13.1	5		8-5	6-5
	11.9	10.3	10.6	4		8-4	6-4
	9.4	7.8	8.1	3		8-3	6-3
	—図示— SHOWN				2	8-171822-2	6-171822-2
C	B	A	極数 (POS)		赤色 (RED)	緑色 (GREEN)	
OBSOLETE	39.4	37.8	38.1	15	5-171822-5	3-171822-5	1-171822-5
	36.9	35.3	35.6	14	5-4	3-4	1-4
	34.4	32.8	33.1	13	5-3	3-3	1-3
	29.4	27.8	28.1	11	5-1	3-1	1-1
	31.9	30.3	30.6	12	5-2	3-2	1-2
	26.9	25.3	25.6	10	5-0	3-0	1-0
	24.4	22.8	23.1	9	4-9	2-9	
	21.9	20.3	20.6	8	4-8	2-8	
	19.4	17.8	18.1	7	4-7	2-7	
	16.9	15.3	15.6	6	4-6	2-6	
	14.4	12.8	13.1	5	4-5	2-5	
	11.9	10.3	10.6	4	4-4	2-4	
	9.4	7.8	8.1	3	4-3	2-3	
	—図示— SHOWN				2	4-171822-2	2-171822-2
C	B	A	極数 (POS)	青色 (BLUE)	黒色 (BLACK)	自然色 (NATURAL)	
				型番 (PART NUMBER)			

1470-19 (1/15)

10 ≥ : ±0.2
30 ≥ > 10: ±0.25
100 ≥ > 30: ±0.3
ANGLES: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL
材料
66 NYLON
(UL94-0)

DWN
H.HOSHINO
12JUN97

CHK
J.TANIGAWA
12JUN97

APVD
S.KUBOUCHI
03OCT97

PRODUCT SPEC
製品規格
108-5118

APPLICATION SPEC
取付適用規格

WEIGHT
0.000000

CUSTOMER DRAWING

TE Connectivity

HOUSING
AMP EI SERIES CONNECTOR

SIZE
A3

CAGE CODE
00779

DRAWING NO
番号
C-171822

RESTRICTED TO
-

SCALE
尺度
4:1

SHEET
1 OF 1

REV
L3