



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Tab**

Wire Size: **1021 – 2048 CMA**

Mating Tab Width: **2.8 mm [.11 in]**

Features

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	2.8 mm[.11 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Copper Zinc Alloy
Terminal Plating Material	Silver
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Mating Retention Type	Locking Lance
-----------------------	---------------



Dimensions

Product Length	22.5 mm[.885 in]
Compatible Insulation Diameter Range	1.4 – 2.3 mm[.055 – .09 in]
Wire Size	1021 – 2048 CMA

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 140 °C[-40 – 284 °F]

Packaging Features

Packaging Quantity	4000
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1-1579007-4
EXTRACTION TOOL



TE Part # 4-1579007-3
EXTRACTION TOOL KIT



TE Part # CAT-T4827-CH8172
Timer Connector Housing




TE Part # 2151379-1
OCEAN_2.0_Applicator-S-080F110OV-RSM



TE Part # 2151379-2
OCEAN_2.0_Applicator-S-080F110OV-RSA



TE Part # 2305570-1
Strip Terminal Cutter-Side Feed-No Crimp

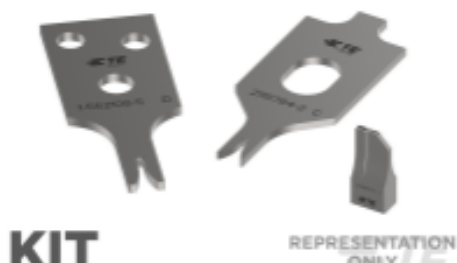


TE Part # 7-2151379-7
OCEAN_2.0_SPARE_PART_KIT-080F110OV

Also in the Series | FASTIN-FASTON 110



Automotive Housings(6)

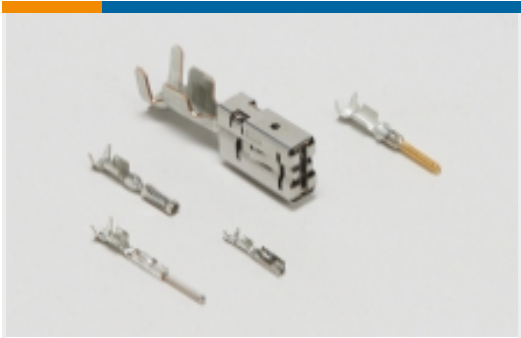

Automotive Terminals(5)



Crimp Terminal Housings(34)



Insertion & Extraction Tools(3)



Quick Disconnects(83)

Customers Also Bought




TE Part #1-968879-1
MT2/JPT70P BUGH KPL



TE Part #776531-2
AS16,PLUG ASSY,ST,06P,E SEAL, CODE B



TE Part #1-917484-2
DYNAMIC D-3 REC CONT. 2L AU 0.38

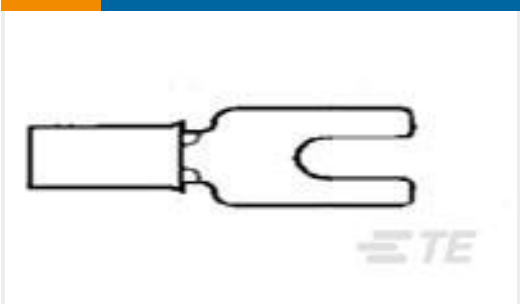

TE Part #41343
SPADE 164(4.17MM) 20-16 AWG TPBR



TE Part #3-1394766-2
2.8FLA-STE-GEH 2X9P

TE Part #K1060643
Battery Disconnecter 35-222

TE Part #1-1414552-0
V23136A1001X057-EV-CBOX

TE Part #K1124232
Relay 300A 24V OE SFL LK 29-331-12-933

TE Part #4-1904049-7
V23134A0007X942-EV-590

TE Part #955-181-012
CGNW 702659 SF S/FAKRA/D/C/I/0.3

Documents

Product Drawings

FF 110 TAB 0.5-1 MM2 .080 F SSP CUZN30

English

FF 110 TAB 0.5-1 MM2 .080 F SSP CUZN30

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_928930-1_P.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_928930-1_P.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_928930-1_P.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

German

Application Specification

English