

## SUMMARY

### # Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series	1B
Termination type	No contacts / Accessory
IP rating	0
Cable Ø	4.00 - 4.40 mm
Status	active
Alternative part	



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	GMA*: Bend relief White
Keying	No keying
Housing Material	Silicone elastomer VMQ
Variant	V : White
Weight	.98 g

### Performance

Configuration
Insulator
Rated Current


### Others

Temp (min / max): -60°C / +200°C  
Temperature range in water steam: +140°C

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# DRAWINGS

## Draws

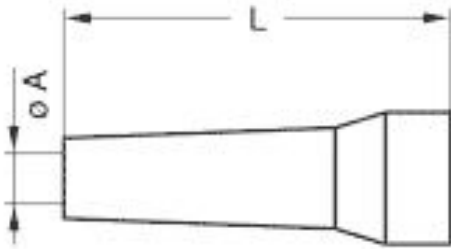

No keying

## Dimensions

	A	L
mm.	4	34
in.	0,16	1,34

# RECOMMENDED BY LEMO

## Tools

None

## Cables

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.