
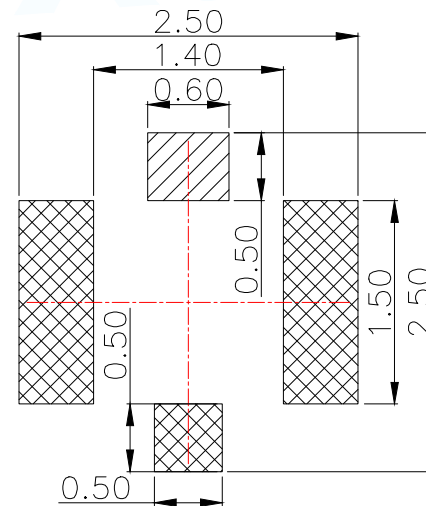

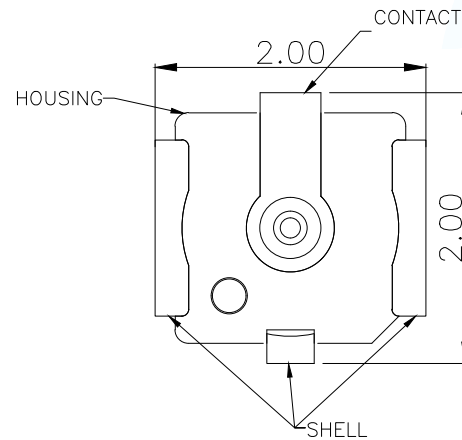
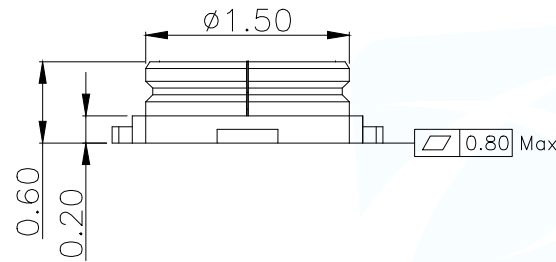


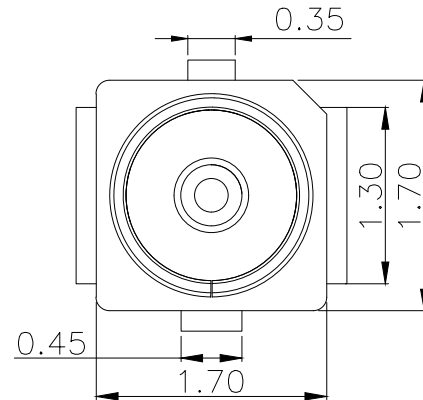

RECOMMENDED PCB LAYOUT
(TOLERANCE:±0.05)

NOTES :




1.0. RATING :

- 1.1. VOITAGE :60 VAC (R.M.S.)
- 1.2. NOMINAL CHARACTERISTIC IMPEDANCE: 50 Ohm
- 1.3. APPLICABLE FREQUENCY: DC ~ 6GHz
- 1.4. VSWR: 1.3 MAX. (DC~3GHz), 1.5 MAX. (3~6GHz)
- 1.5. TEMPERATURE :-40°C TO +85°C

2.0. ALL DIMENSIONS SHOULD BE CONTROLLED IN FAI:

3.0. MARKED  SHOULD BE CONTROLLED BY QIP.:

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			
DECIMALS:	ANGLES:	TITLE: MICRO RF IV BOARD SMT TYPE PACKING DWG	
X.X±0.20	.°±3.0°	PAR	IPEX-004
X.XX±0.10	X.°±2.0°	DWN	
X.XXX±0.05	X.X°±1.0°	CHKD	
CUSTOMER COPY		APVD	
		SCALE:1:1	UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A

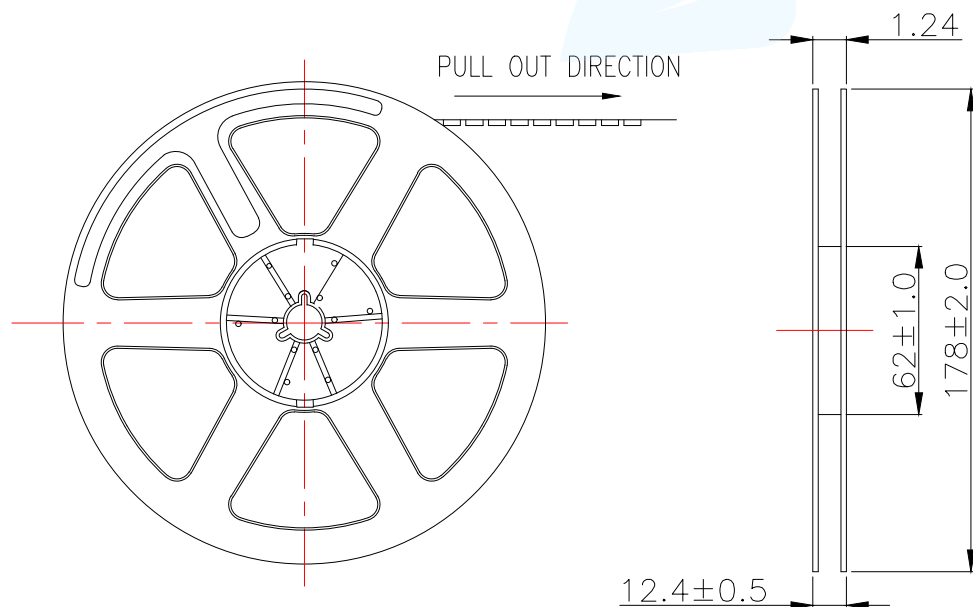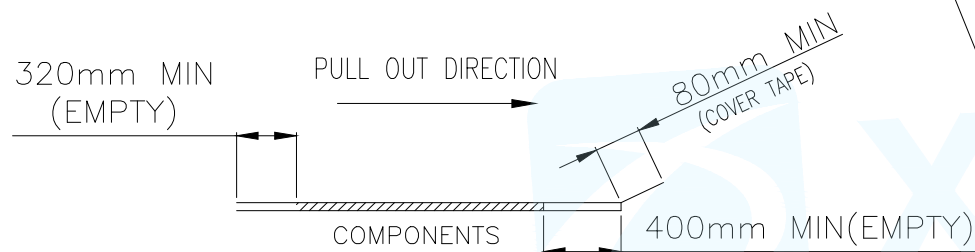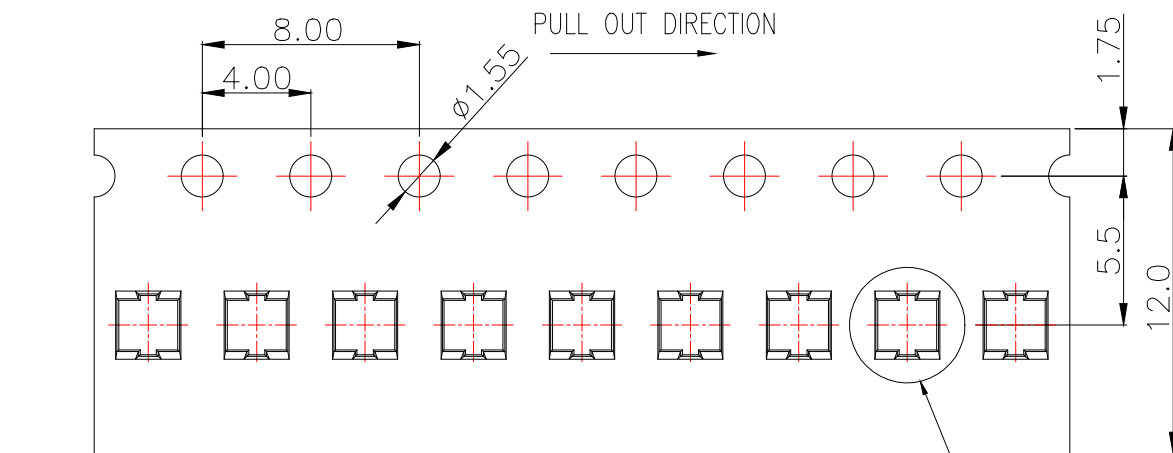

NOTES:

1. MATERIAL :

1.1 EMBOSSED CARRIER: PET

1.2 COVER TAPE: PET

1.3 SHIPPING CARTON: CORRUGATED FIBER

2. DIMENSION :



2.1 REEL: W=12.4

2.2 SHIPPING CARTON: L=190, W=190, H=190


3. PEELING RESISTANCE: 10gf~130gf.

4. QUANTITY/WEIGHT :


PART NO.	PRIMARY PACKING	SECONDARY PACKING	NET WEIGHT	GROSS WEIGHT
IPEX-004	3000PCS/REEL	30000PCS/BOX	0.18KG/REEL	2.00KG/BOX

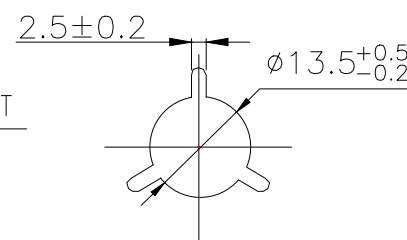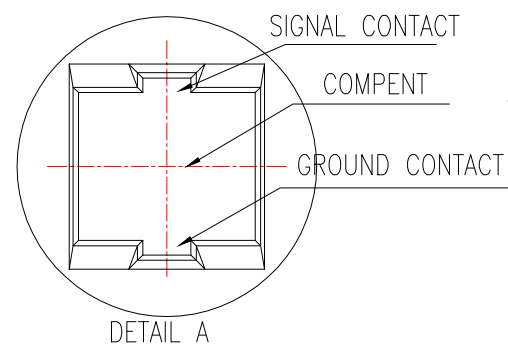

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: MICRO RF IV BOARD SMT TYPE PACKING DWG	
DECIMALS:	ANGLES:	PAR	IPEX-004
X.X $\pm$ 0.20	. $\pm$ 3.0°	DWN	
X.XX $\pm$ 0.10	X. $\pm$ 2.0°	CHKD	
X.XXX $\pm$ 0.05	X.X $\pm$ 1.0°	APVD	
CUSTOMER COPY		SCALE:1:1	UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A




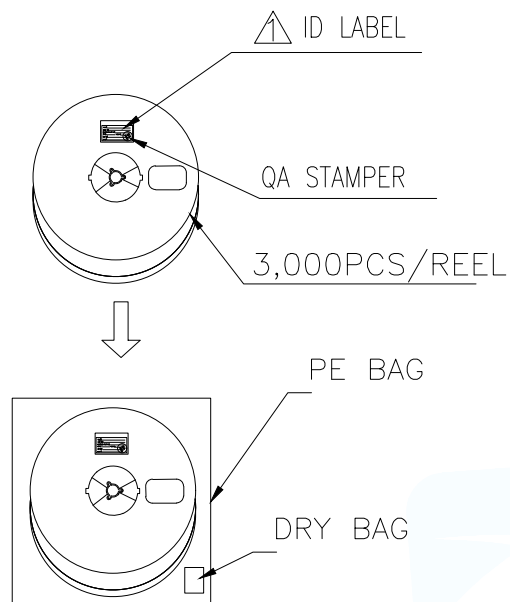


10 REELS/CARTON



NAME:	_____
PART No:	_____
CUSTOMER PART No:	_____
Q'TY:	_____ WEIGHT: _____
LOT No:	_____
DATE :	_____

ID LABEL

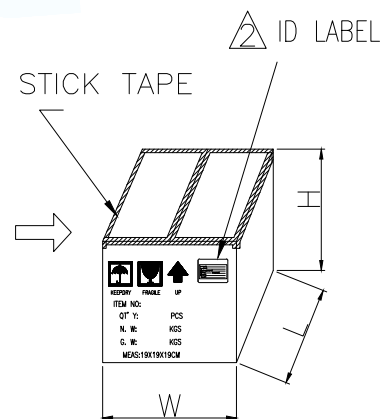

QT' Y: 30,000 PCS
N. W: 0.077 KGS
G. W: 1.033 KGS
MEAS: 19X19X19CM

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: MICRO RF IV BOARD SMT TYPE PACKING DWG
			PAR IPEX-004
DECIMALS:	ANGLES:		DWN
X.X±0.20	.°±3.0°		CHKD
X.XX±0.10	X.°±2.0°		APVD
X.XXX±0.05	X.X°±1.0°	CUSTOMER COPY	SCALE: 1:1 UNIT: MM
		SIZE: A4	SHEET: 1F1 REV: A