

**JACKPAC
JPP NPN PNP 24VDC****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



The JPP level converters convert NPN signals into PNP signals and vice versa. This guarantees optimum adaptation to existing circuits.

General ordering data

Type	JPP NPN PNP 24VDC
Order No.	8852350000
Version	JACKPAC, Level converter, Rated control voltage: 18...24...30 V DC, Rated switching voltage: 18...30 V DC, Continuous current: 0.4 A, M12 plug/socket, A-coded
GTIN (EAN)	4032248567355
Qty.	1 pc(s).

JACKPAC
JPP NPN PNP 24VDC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Length	83 mm	Length (inches)	3.268 inch
Width	36 mm	Width (inches)	1.417 inch
Height	14.4 mm	Height (inches)	0.567 inch
Net weight	52 g		

Temperatures

Operating temperature, max.	60 °C	Operating temperature, min.	0 °C
Storage temperature, max.	85 °C	Storage temperature, min.	-20 °C
Operating temperature	0 °C...60 °C	Storage temperature	-20 °C...85 °C

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Input

Rated control voltage	18...30 V DC
-----------------------	--------------

Control side

Rated control voltage	18...24...30 V DC	Sensor	2-/ 3-Conductor Sensor NPN-type
Input current for sensor	< 200 mA		

Output

Rated switching voltage	18...30 V DC	Continuous current	0.4 A
-------------------------	--------------	--------------------	-------

Load side

Rated switching voltage	18...30 V DC	Continuous current	0.4 A
Rated switching current	400 mA	Voltage drop at max. load	≤ 1 V

Contact data

Contact type	(Solid state relay)
--------------	---------------------

General data

Colour	Grey
--------	------

Insulation coordination

Rated voltage	32 V	Pollution severity	2
Surge voltage category	I	Protection degree	IP67

Further details of approvals / standards

Standards	DIN EN 50178, UL508	Certificate no. (cULus)	E141197
-----------	---------------------	-------------------------	---------

Connection data

Wire connection method	M12 plug/socket, A-coded
------------------------	--------------------------

Creation date December 19, 2018 8:05:27 PM CET

**JACKPAC
JPP NPN PNP 24VDC**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
www.weidmueller.com

Technical data**Technical specifications for cable**

Number of poles	1
-----------------	---

Classifications

ETIM 3.0	EC001134	ETIM 4.0	EC001134
ETIM 5.0	EC001134	ETIM 6.0	EC001134
UNSPSC	30-21-18-01	eClass 5.1	27-27-09-90
eClass 6.2	27-27-09-90	eClass 7.1	27-27-09-90
eClass 8.1	27-27-09-90	eClass 9.0	27-27-09-90
eClass 9.1	27-21-91-90		

Approvals

Approvals



ROHS	Conform
------	---------

Downloads


Brochure/Catalogue	CAT 8 SAI 15/16 EN FL FIELDWIRING EN
Engineering Data	EPLAN, WSCAD

JACKPAC JPP NPN PNP 24VDC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Dimensioned drawing

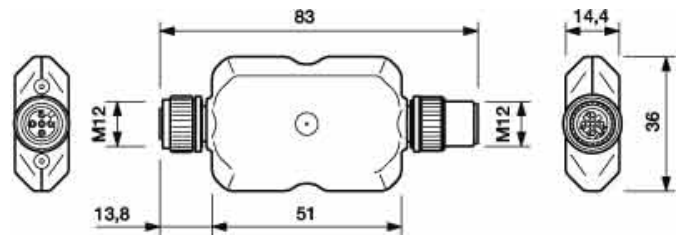

Pinning

