


SPECIFICATIONS:


Current Rating: 2A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuit s	Dimensions(mm)			Circuit s	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	5.10	6.20	9P	16.00	19.10	20.20
3P	4.00	7.10	8.20	10P	18.00	21.10	22.20
4P	6.00	9.10	10.20	11P	20.00	23.10	24.20
5P	8.00	11.10	12.20	12P	22.00	25.10	26.20
6P	10.00	13.10	14.20	13P	24.00	27.10	28.20
7P	12.00	15.10	16.20	14P	26.00	29.10	30.20
8P	14.00	17.10	18.20	15P	28.00	31.10	32.20

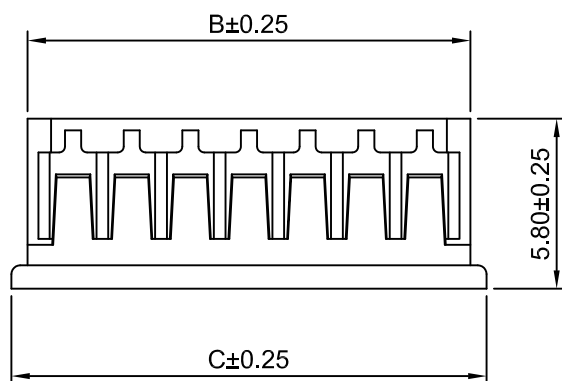

4P~15P

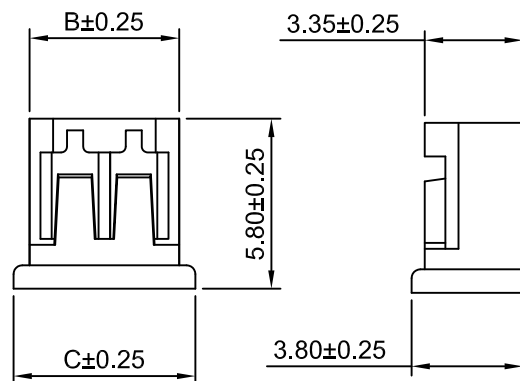

2P~3P

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	Title : 2.00mm Pitch Housing	
mm	4:1	1 of 1		
Draw By: Dlankul Wan		Approved : Jack Yln		
General Tolerance			DRAW NO : A2004H-XP	
x.x±0.25 x.xx±0.20 x.xxx±0.15		PROJECT 		
			REV A1	

A1	CHANGE THE SIZE B&C	2019.06.17	x.xx±0.25	PROJECT ⊕
A0	NEW RELEASE	2005.05.10	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

REV	A1
-----	----