
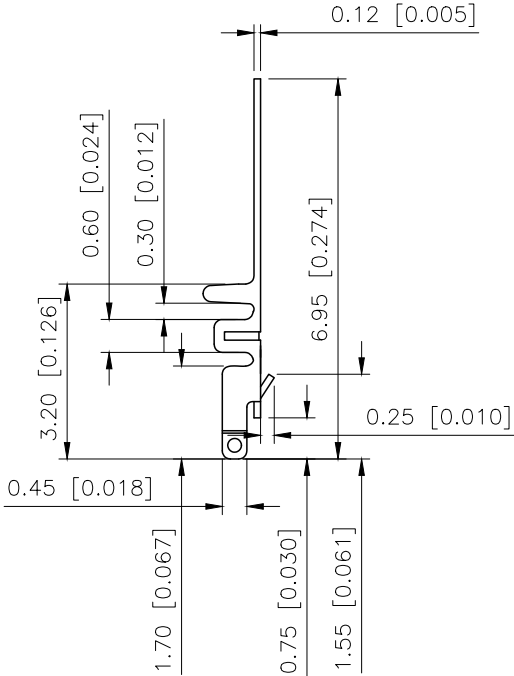



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.09.02	阿树

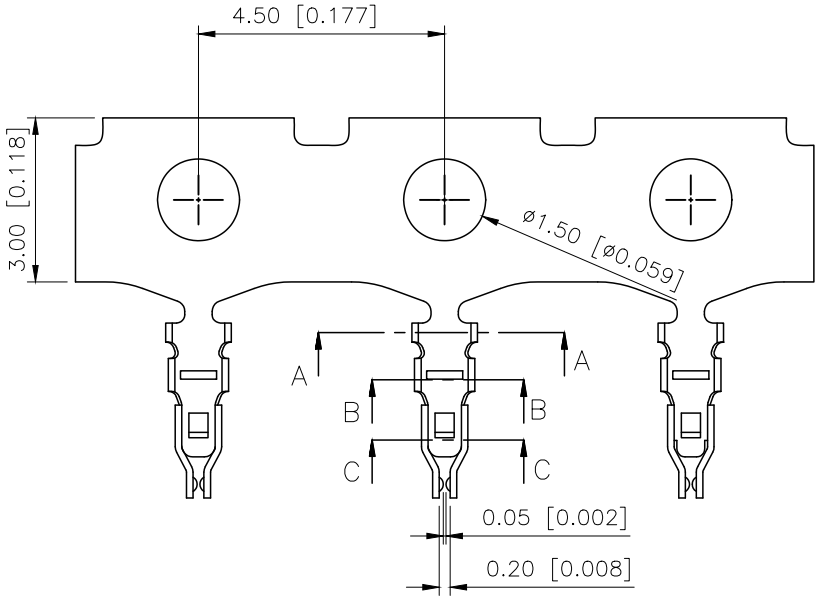


- SPECIFICATIONS
- Voltage rating:50V AC/DC
 - Current rating:2A AC/DC
 - Withstanding Voltage:500V AC/minute
 - Temperature range:−40°C~+125°C
 - Insulation resistance:≥100MΩ
 - Contact resistance:≤20mΩ
 - After environmental testing:≤40mΩ

PART NO.:
X1224 T-P V01
① ② ③ ④


- ①Series No
②Category:T—Terminal
③Material:P—Phosphor bronze
④Plating Style:
V01—All Gold Flash



SECTION A-A



SECTION B-B



SECTION C-C

X1224T-PV01	Phospho Bronze	AWG#28-30	0.70mm	Stamping Before Pating: 30u'' Ni;Whole Gold:Gold Flash	X1224H
PART No	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 1.20mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X1224T-PV01
APPROVED		SIZE: A4	DWG NO.: