


# PX0911/03/S Datasheet

Product Name // Flex Cable Connector PX0911 Series 3  
Contact Socket 13mm-15mm Cable (Yellow Gland)

 [View Product Page](#)

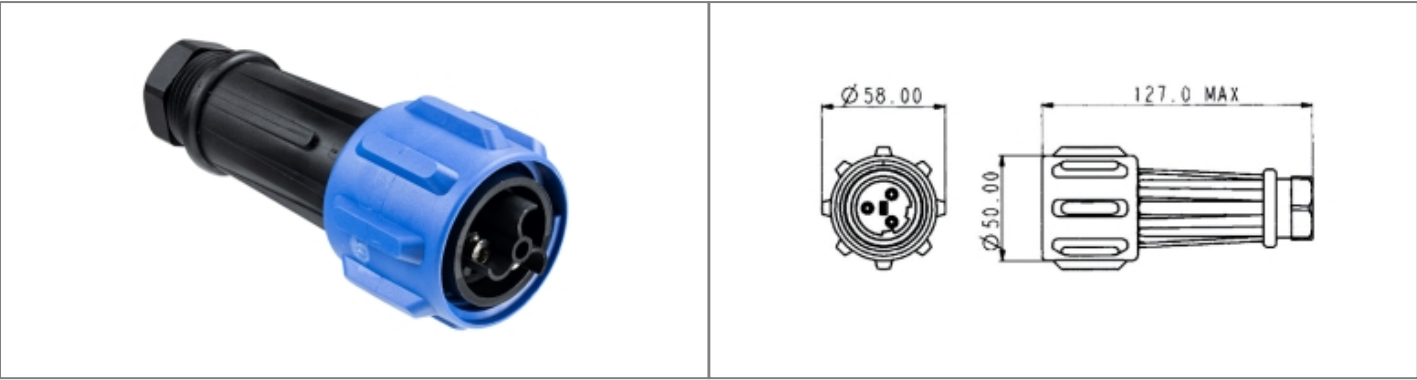

| // Product Description:                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>Flex Cable Connectors</li><li>Water and dustproof to IP68 when mated with compatible connector</li><li>Positive fast-acting locking ring - can be turned with a gloved hand</li><li>Plug or Socket</li><li>2, 3, 4, 5, 7, 10 Contact with leading Earth on 3, 4, 5, 7 Contact versions, trailing Neutral on 5 Contact version</li><li>Screw Terminals</li></ul> | <ul style="list-style-type: none"><li>Choice of cable acceptance 7mm-22mm diameter depending on part code (see data for details):<ul style="list-style-type: none"><li>PX09 part codes 7mm-15mm diameter</li><li>PXA9 part codes (large cable version with strain relief clamp) 14mm-22mm diameter</li></ul></li><li>Packs of Cable Glands for differing cable diameters available separately (PX0980, PXA980)</li><li>PX0960/PX0990 Sealing Caps available separately to maintain IP rating of unmated connectors</li><li>Mate with PX09 or PXA9 Series Flex and Panel Mount Connectors, as appropriate</li></ul> |

| // General Information:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Product Display Title:</p> <p>Product Family:</p> <p>Product Series:</p> <p>Approvals:</p> <p>Body Material:</p> <p>Body Material Type:</p> <p>Contact Type:</p> <p>Coupling Type:</p> <p>Current Max:</p> <p>Diameter Over Coupling Ring Mm:</p> <p>Flamability Rating:</p> <p>Function:</p> <p>Ip Rating:</p> <p>Max Cable Entry Size:</p> <p>Min Cable Entry Size:</p> <p>Max Contact Accomodation Awg:</p> <p>Min Contact Accomodation Awg:</p> <p>Max Contact Accomodation Mm2:</p> <p>Min Contact Accomodation Mm2:</p> <p>Max Operating Temperature:</p> <p>Min Operating Temperature:</p> <p>Number Of Contacts:</p> <p>Voltage Max:</p> | <p>Flex Cable Connectors</p> <p>Circular Power Connectors</p> <p>900 Series Buccaneer</p> <p>UL</p> <p>Polyamide (PA)</p> <p>Plastic Body</p> <p>Socket Contact</p> <p>Screw</p> <p>32A</p> <p>58mm</p> <p>UL94V-0</p> <p>Flex Cable Connector</p> <p>IP68</p> <p>15mm</p> <p>13mm</p> <p>13AWG</p> <p>10AWG</p> <p>4mm2</p> <p>2.6mm2</p> <p>+85°C</p> <p>-40°C</p> <p>3 Contacts</p> <p>600V</p> |

// Product PDF Links

 900 Series power connectors...

 900 Series power connectors wiring...

// Product 3D CAD Model Links

 PX0911/03/S3D CAD Model