REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		尺寸修正，图面升级整理图面	2024.8.30	阿树
A2	N/A		独立各PIN数图纸，增加开孔定位尺寸	2024.12.10	阿树

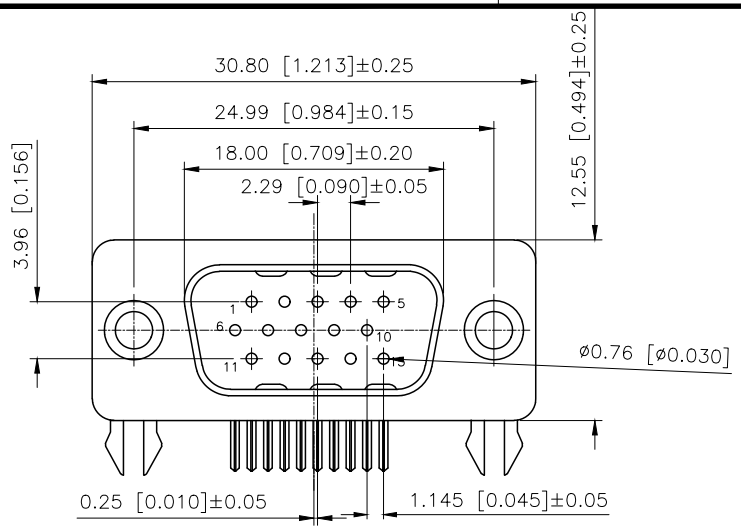

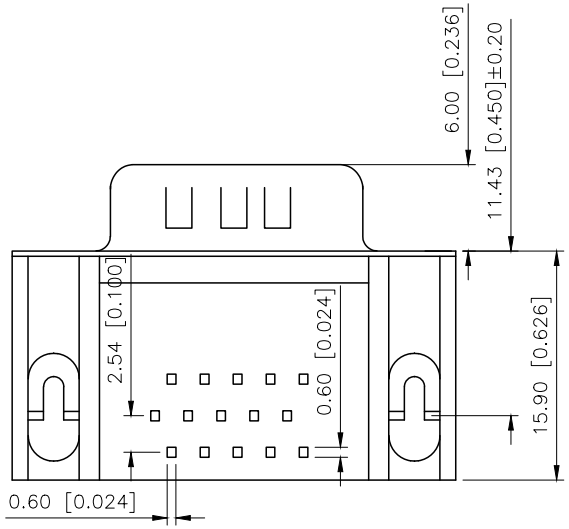

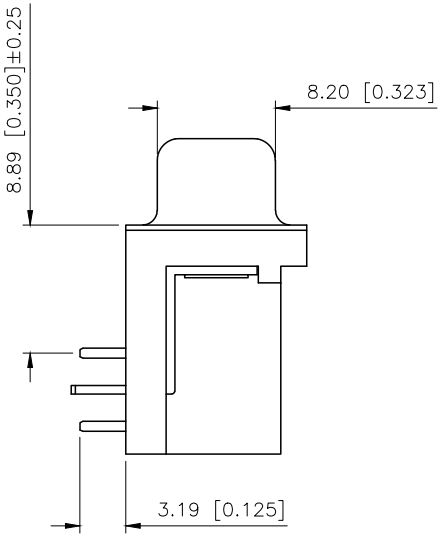

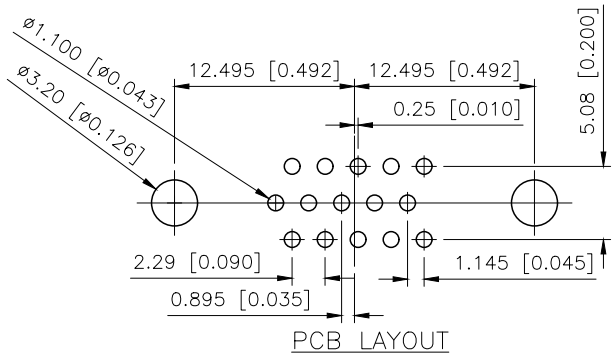

PCB LAYOUT

PART NO.:

X06	15	W	T	X	X	X
①	②	③	④	⑤	⑥	⑦

①Series NO.
②Row No.Pin No:15PIN
③Welding Board Angle :W—Male
④T:Tradutional
⑤Planting Categotry:
1:1U' ;2:2U' ;3:3U' ;4:5U' ;5:15U' 6:30U' ;7:AuSn
⑥B:Black W:White BL:Blue Y:Yellow G:Green R:Red
⑦1:TYPE—1; 2:TYPE—2; 3:TYPE—3; 6:TYPE—6

Specifications:
规格:
1.Voltage rating:250VAC/DC
额定电压：250V AC/DC
2.Current rating:3A AC/DC
额定电流：3A AC/DC
3.Withstanding voltage:500V AC/minute
耐受电压：≥500V AC/分钟
4.Temperature range: —55℃—+105℃
温度范围：—55℃—+105℃
5.Insulation resistance:1000MΩMIN
绝缘电阻：≥1000MΩ
6.Contact resistance:30mΩMax
接触电阻：≥30mΩ
7.Materiai :
材料和成本:
8.INSULATOR:PBT UL 94V—0
绝缘体：PBT UL 94V—0
9.SHELL:SPCC—SD Plated Ni /Au/Sn
外壳：铁合金 镀镍、金、锡
10.CONTACT MATERIAL:Copper Alloy
触点材料：铜合金

铆合方式	TYPE—1：铆合	TYPE—6：直铆锁	TYPE—3：叉锁	TYPE—2：铆合锁螺丝
图式				

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB 星创 Connection

DESIGN	阿树	VIEW:	MODEL TYPE: D—SUB
CHECKED		UNIT: mm/in	PART NO.: X0615WTXXX
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A2

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		尺寸修正，图面升级整理图面	2024.8.30	阿树
A2	N/A		独立各PIN数图纸，增加开孔定位尺寸	2024.12.10	阿树

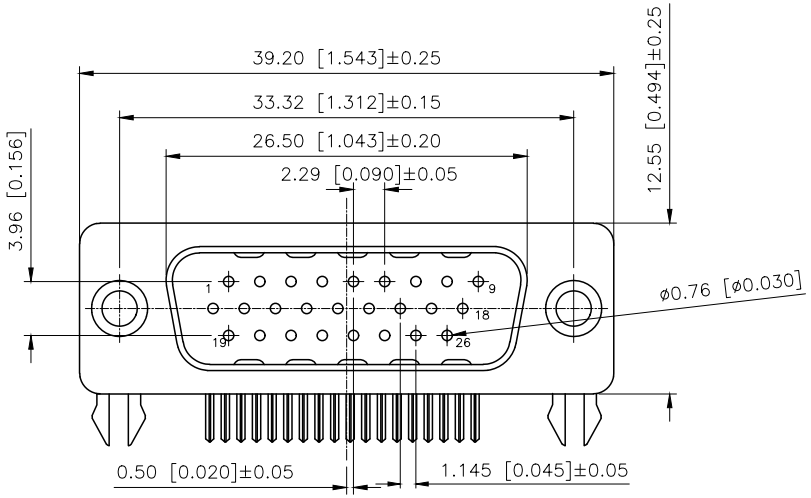

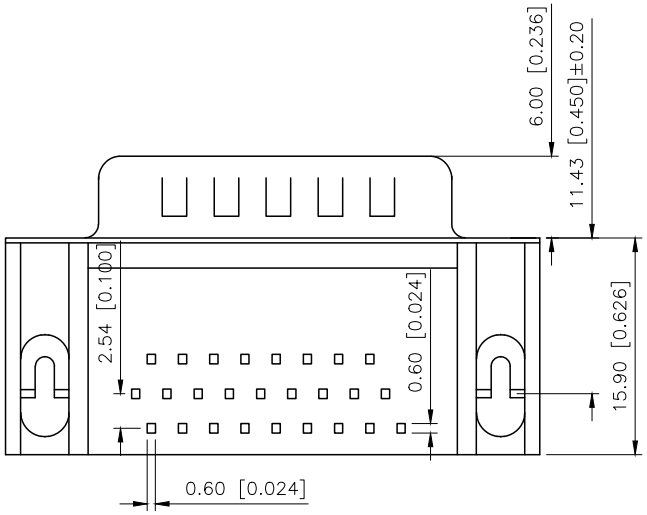

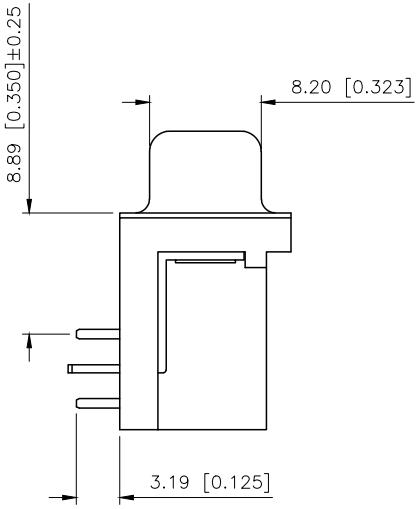

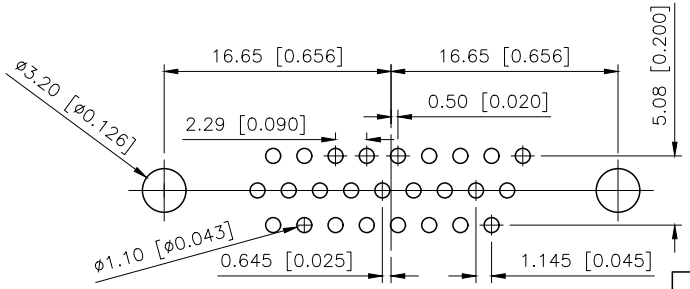

PCB LAYOUT

PART NO.:

X06 26 W T X X X
① ② ③ ④ ⑤ ⑥ ⑦

①Series NO.
②Row No.Pin No:26PIN
③Welding Board Angle :W—Male
④T:Tradutional
⑤Planting Categotry:
1:1U' ;2:2U' ;3:3U' ;4:5U' ;5:15U' 6:30U' ;7:AuSn
⑥B:Black W:White BL:Blue Y:Yellow G:Green R:Red
⑦1:TYPE—1; 2:TYPE—2; 3:TYPE—3; 6:TYPE—6

Specifications:
规格：
1.Voltage rating:250VAC/DC
额定电压：250V AC/DC
2.Current rating:3A AC/DC
额定电流：3A AC/DC
3.Withstanding voltage:500V AC/minute
耐受电压：≥500V AC/分钟
4.Temperature range: —55℃—+105℃
温度范围：—55℃—+105℃
5.Insulation resistance:1000MΩMIN
绝缘电阻：≥1000MΩ
6.Contact resistance:30mΩMax
接触电阻：≥30mΩ
7.Materiai :
材料和成本:
8.INSULATOR:PBT UL 94V—0
绝缘体：PBT UL 94V—0
9.SHELL:SPCC—SD Plated Ni /Au/Sn
外壳：铁合金 镀镍、金、锡
10.CONTACT MATERIAL:Copper Alloy
触点材料：铜合金

铆合方式	TYPE-1：铆合	TYPE-6：直铆锁	TYPE-3：叉锁	TYPE-2：铆合锁螺丝
图式				

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB 星创 Connection

DESIGN	阿树	VIEW:	MODEL TYPE: D-SUB
CHECKED		UNIT: mm/in	PART NO.: X0626WTXXX
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A2

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		尺寸修正，图面升级整理图面	2024.8.30	阿树
A2	N/A		独立各PIN数图纸，增加开孔定位尺寸	2024.12.10	阿树

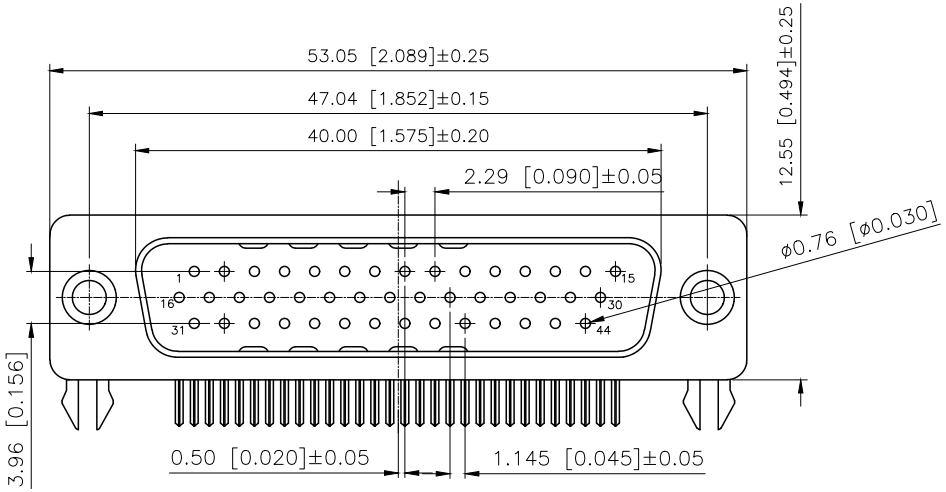

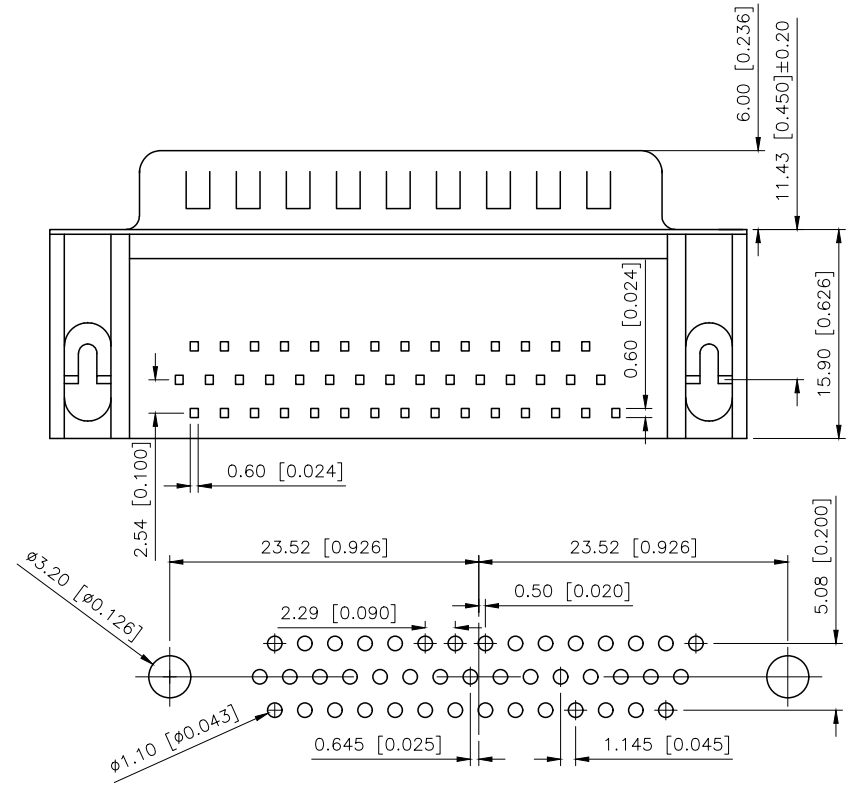

PCB LAYOUT

PART NO.:

X06 44 W T X X X
① ② ③ ④ ⑤ ⑥ ⑦

①Series NO.
②Row No.Pin No:44PIN
③Welding Board Angle :W—Male
④T:Tradutional
⑤Planting Categotry:
1:1U' ;2:2U' ;3:3U' ;4:5U' ;5:15U' 6:30U' ;7:AuSn
⑥B:Black W:White BL:Blue Y:Yellow G:Green R:Red
⑦1:TYPE—1; 2:TYPE—2; 3:TYPE—3; 6:TYPE—6

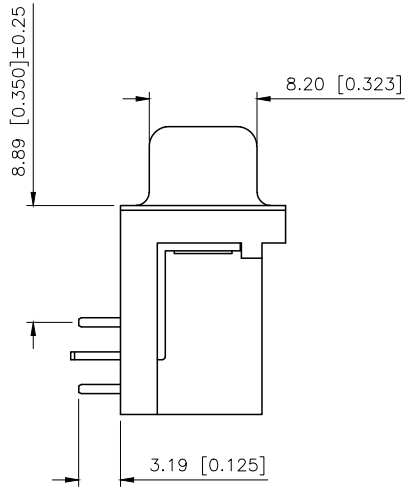

Specifications:
规格：
1.Voltage rating:250VAC/DC
额定电压：250V AC/DC
2.Current rating:3A AC/DC
额定电流：3A AC/DC
3.Withstanding voltage:500V AC/minute
耐受电压：≥500V AC/分钟
4.Temperature range: —55℃—+105℃
温度范围：—55℃—+105℃
5.Insulation resistance:1000MΩMIN
绝缘电阻：≥1000MΩ
6.Contact resistance:30mΩMax
接触电阻：≥30mΩ
7.Materiai :
材料和成本:
8.INSULATOR:PBT UL 94V—0
绝缘体：PBT UL 94V—0
9.SHELL:SPCC—SD Plated Ni /Au/Sn
外壳：铁合金 镀镍、金、锡
10.CONTACT MATERIAL:Copper Alloy
触点材料：铜合金

铆合方式	TYPE-1：铆合	TYPE-6：直铆锁	TYPE-3：叉锁	TYPE-2：铆合锁螺丝
图式				

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB 星创 Connection

DESIGN	阿树	VIEW:	MODEL TYPE: D-SUB
CHECKED		UNIT: mm/in	PART NO.: X0644WTXXX
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A2

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		尺寸修正，图面升级整理图面	2024.8.30	阿树
A2	N/A		独立各PIN数图纸，增加开孔定位尺寸	2024.12.10	阿树

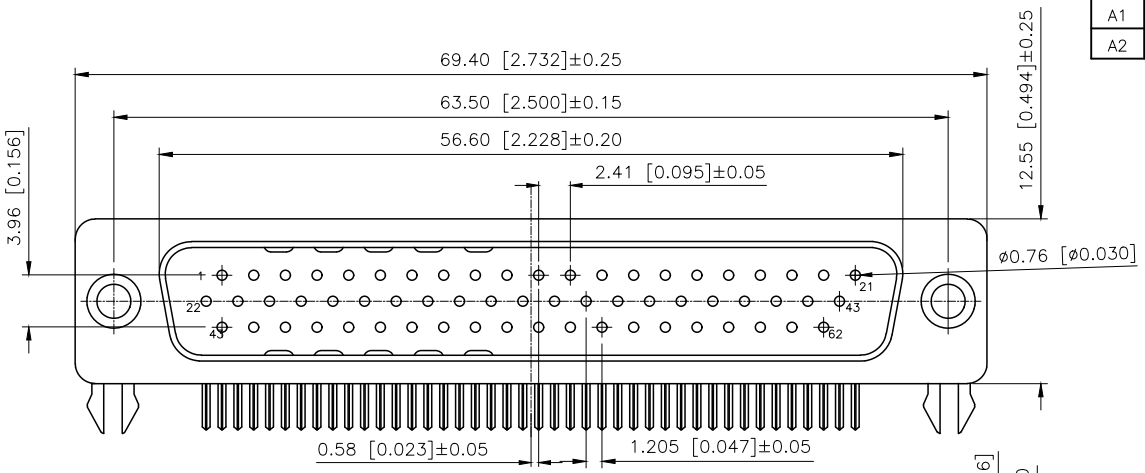

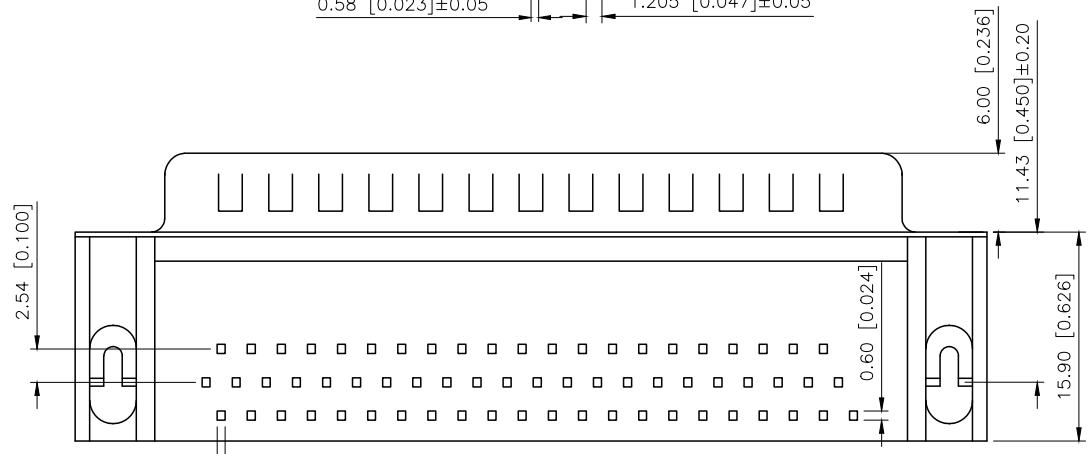

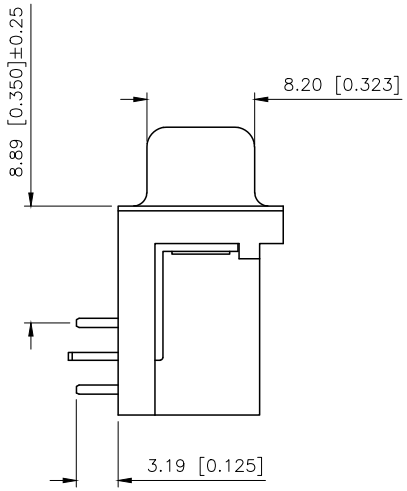

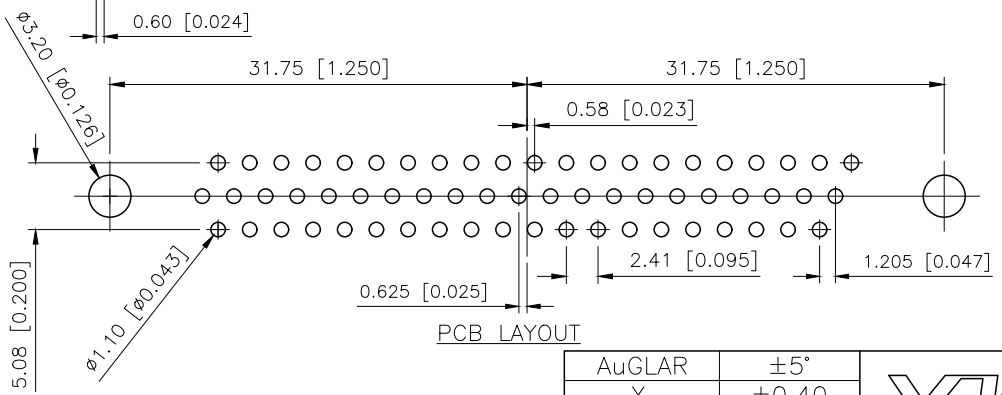

PCB LAYOUT

PART NO.:

X06 62 W T X X X
① ② ③ ④ ⑤ ⑥ ⑦

①Series NO.
②Row No.Pin No:62PIN
③Welding Board Angle :W—Male
④T:Tradutional
⑤Planting Categotry:
1:1U' ;2:2U' ;3:3U' ;4:5U' ;5:15U' 6:30U' ;7:AuSn
⑥B:Black W:White BL:Blue Y:Yellow G:Green R:Red
⑦1:TYPE—1; 2:TYPE—2; 3:TYPE—3; 6:TYPE—6

Specifications:
规格：
1.Voltage rating:250VAC/DC
额定电压：250V AC/DC
2.Current rating:3A AC/DC
额定电流：3A AC/DC
3.Withstanding voltage:500V AC/minute
耐受电压：≥500V AC/分钟
4.Temperature range: —55℃—+105℃
温度范围：—55℃—+105℃
5.Insulation resistance:1000MΩMIN
绝缘电阻：≥1000MΩ
6.Contact resistance:30mΩMax
接触电阻：≥30mΩ
7.Materiai :
材料和成本:
8.INSULATOR:PBT UL 94V—0
绝缘体：PBT UL 94V—0
9.SHELL:SPCC—SD Plated Ni /Au/Sn
外壳：铁合金 镀镍、金、锡
10.CONTACT MATERIAL:Copper Alloy
触点材料：铜合金

铆合方式	TYPE-1：铆合	TYPE-6：直铆锁	TYPE-3：叉锁	TYPE-2：铆合锁螺丝
图式				

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB 星创 Connection

DESIGN	阿树	VIEW:	MODEL TYPE: D-SUB
CHECKED		UNIT: mm/in	PART NO.: X0662WTXXX
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A2