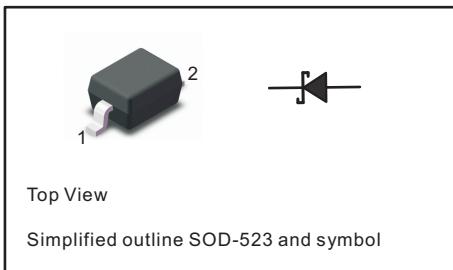


**PINNING**

PIN	DESCRIPTION
1	Cathode
2	Anode


**Features**

- Extremely small surface mounting type
- High reliability
- for high speed switching application

**Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )**

Parameter	Symbol	Value	Unit
Peak Reverse Voltage	$V_{RM}$	90	V
Reverse Voltage	$V_R$	80	V
Average Rectified Forward Current	$I_{F(AV)}$	100	mA
Peak Forward Current	$I_{FM}$	225	mA
Non-repetitive Peak Forward Surge Current (at $t = 1 \text{ s}$ )	$I_{FSM}$	500	mA
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 55 to + 150	$^\circ\text{C}$

**Characteristics at  $T_a = 25^\circ\text{C}$** 

Parameter	Symbol	Max.	Unit
Forward Voltage at $I_F = 100 \text{ mA}$	$V_F$	1.2	V
Reverse Current at $V_R = 80 \text{ V}$	$I_R$	0.1	$\mu\text{A}$
Capacitance Between Terminals at $V_R = 0.5 \text{ V}$ , $f = 1 \text{ MHz}$	$C_T$	3	pF
Reverse Recovery Time at $V_R = 6 \text{ V}$ , $I_F = 10 \text{ mA}$ , $R_L = 100 \Omega$	$t_{rr}$	4	ns

**Typical Characteristics:** ( $T_c=25^\circ\text{C}$  unless otherwise noted)

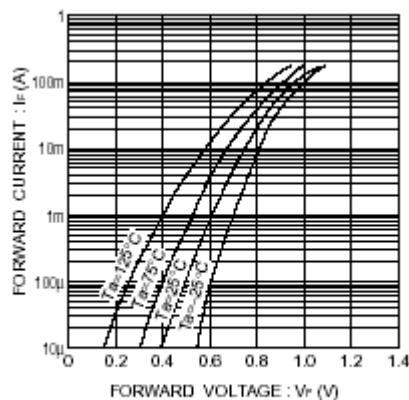


Fig.1 Forward characteristics

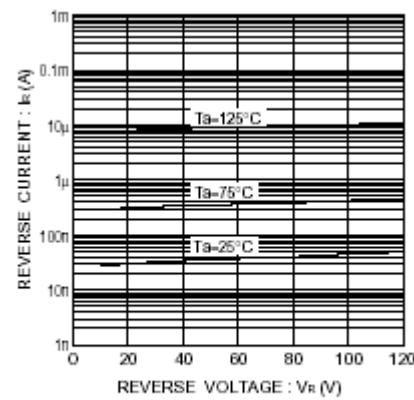


Fig.2 Reverse characteristics

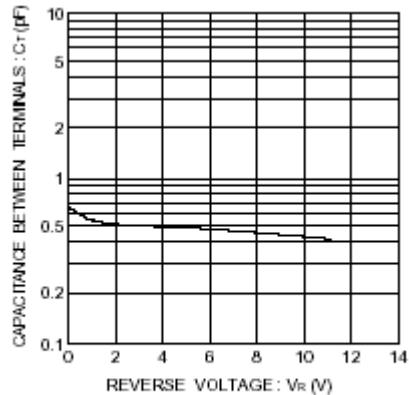


Fig.3 Capacitance between terminals

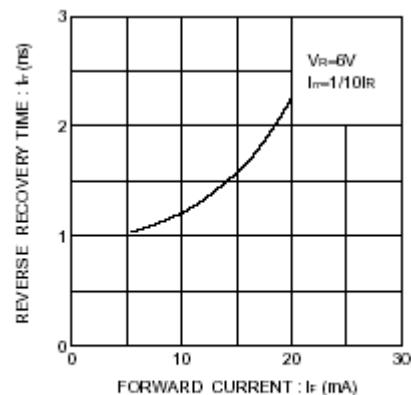


Fig.4 Reverse recovery time characteristics

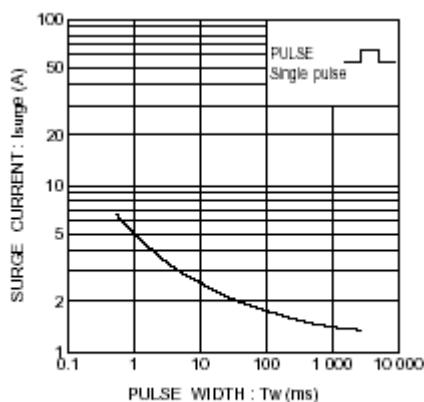


Fig.5 Surge current characteristics


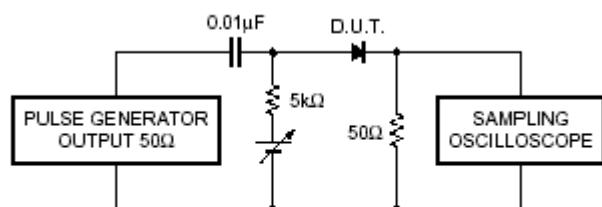


Fig.6 Reverse recovery time ( $t_{rr}$ ) measurement circuit

## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-523

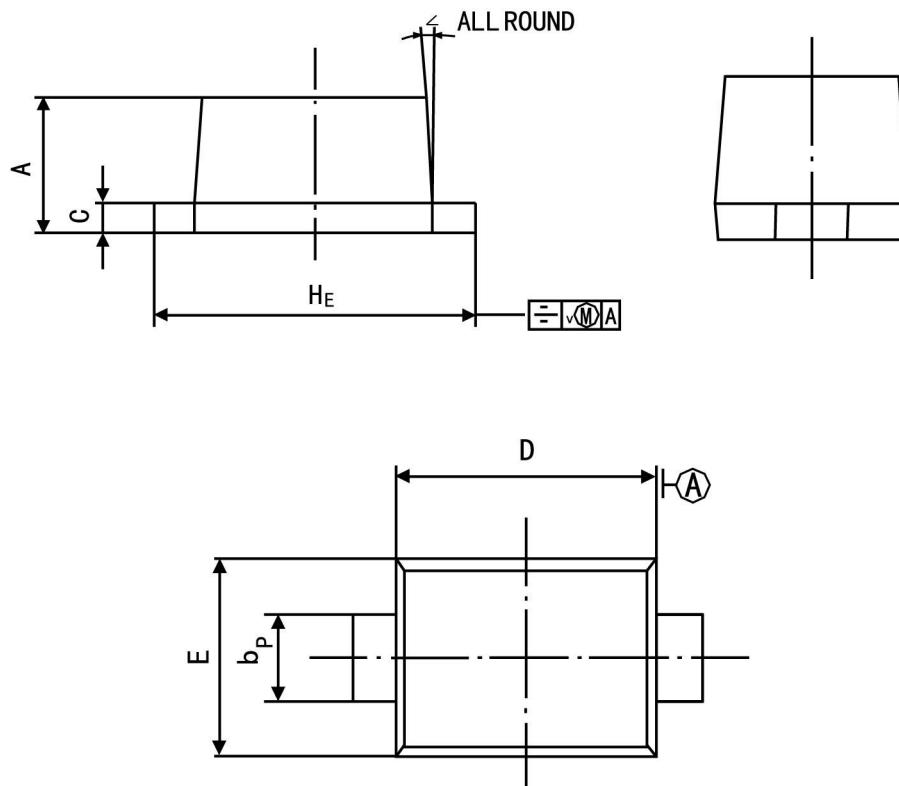

Symbol	Dimension in Millimeters	
	Min	Max
A	0.60	0.70
bp	0.30	0.40
C	0.100	0.14
D	1.15	1.25
E	0.75	0.85
HE	1.50	1.70
V	—	0.10
∠	—	5°