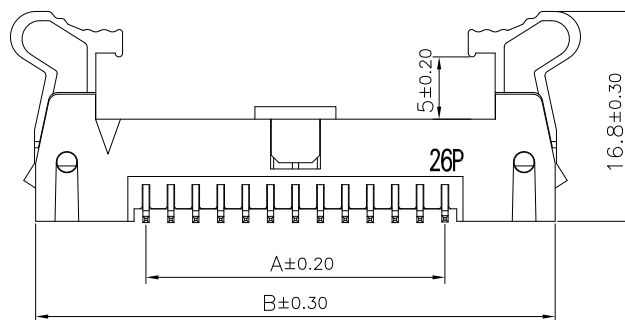
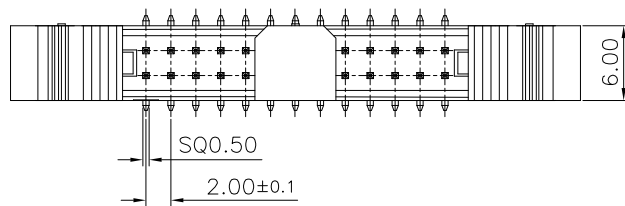


Specifications:

Current Rating:2.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:500V AC For One Minute

Operating Temperature Range:−40°C To +105°C

Materials:

Insulator:High Temp. Plastic(Nylon 6T UL94V−0)


Insulator Color:Black

Terminal:Copper Alloy

Plating:Gold Plated

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
10	8.00	25.70	30	28.00	45.70
12	10.00	27.70	34	32.00	49.70
14	12.00	29.70	40	38.00	55.70
16	14.00	31.70	44	42.00	59.70
20	18.00	35.70	50	48.00	65.70
22	20.00	37.70	60	58.00	75.70
24	22.00	39.70			
26	24.00	41.70			

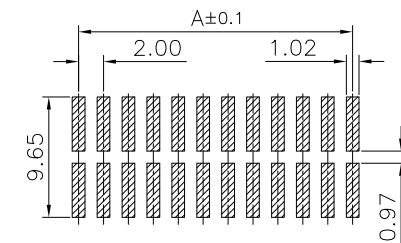

PCB Layout

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	CnC Tech Industrial Cable and Connector Technology	
				CHECKED:	UNIT: MM	DESCRIPTION: 2.0MM SHROUNDER HEADER SMD EJECTOR TYPE	SIZE A4
					SCALE:1:1		
	05-FEB-2020			APPROVAL:	SHEET: 1 / 1	PART NO: 3110-XX-003-12-00-TR	
REV	DATE	FILE	BY		PROJECTION: 		

05—FEB—2020

