


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		INITIAL RELEASE	2024.7.13	阿树
A2	N/A		更新图框	2024.12.27	阿树

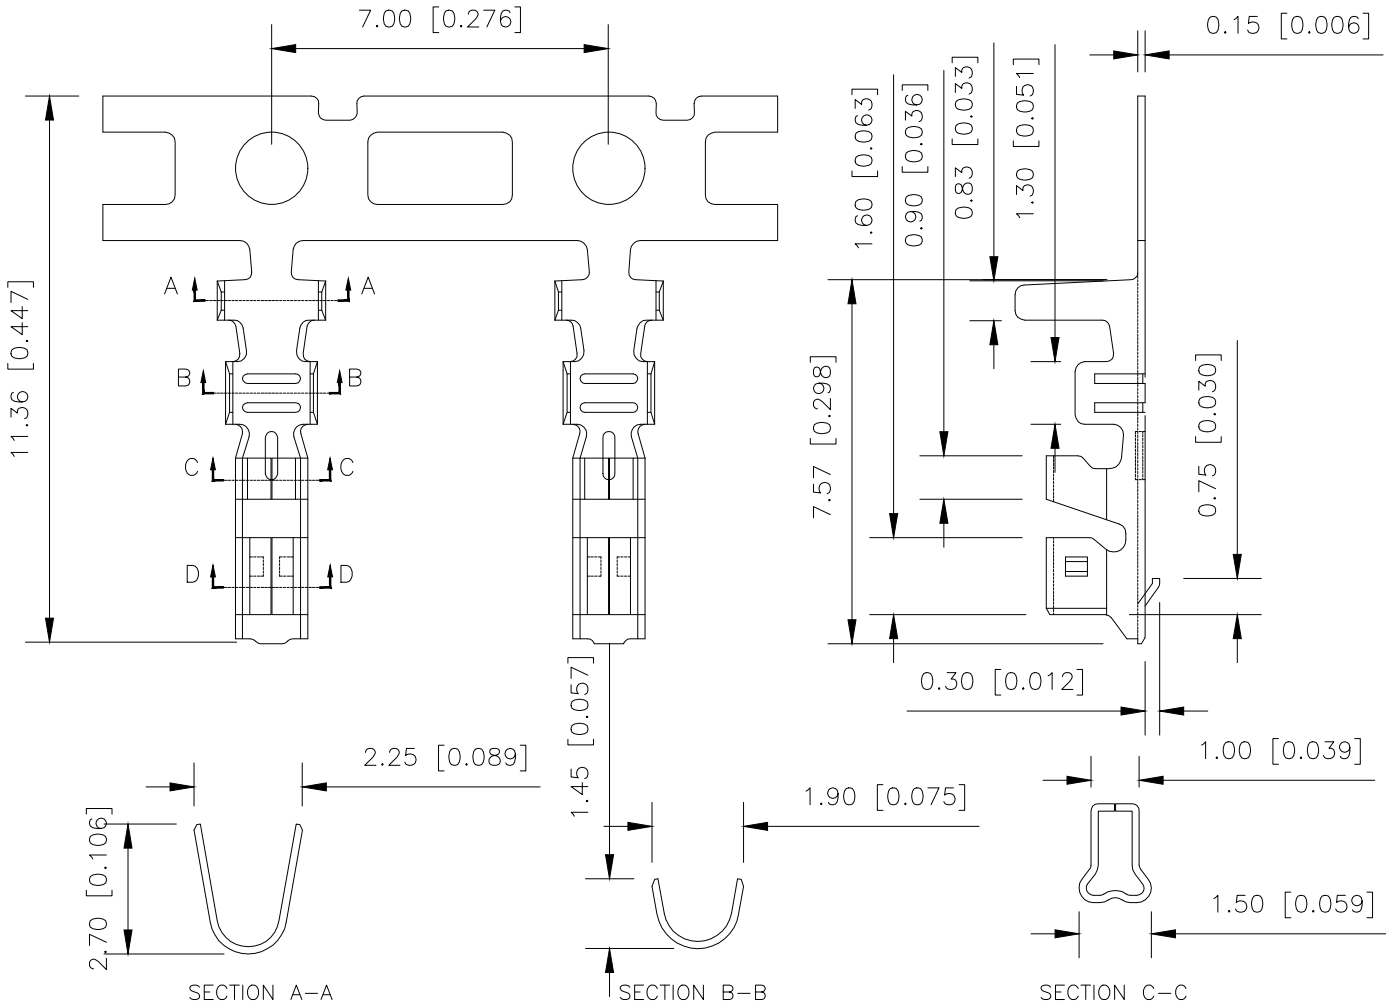

- SPECIFICATIONS
- Voltage rating:250VAC,DC
 - Current rating:3A,AC,DC
 - Withstanding Voltage:800V AC/minute
 - Temperature range:-45°C+95°C
 - Contact resistance:15mΩ max

PART NO.:

K 202820 I-P SN
① ② ③ ④ ⑤

- ①K:XKBTEK-Car Connector
②XKB Series No
③Category:T-Terminal
④Material:P-Phosphor bronze
⑤Plating Category: SN-Tin-Plated

K202820T-PSN	Phosphor Bronze	Tin-Plated	AWG#22~28	1.5mm (Max)	K202820H
PART NO	Material	Flinish(pin)	Wire Range	Insulation O.D.	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	2.0mm Automobile Connector
CHECKED		UNIT: mm/in	PART NO.: K202820T-PSN
APPROVED		SIZE: A4	DWG NO.: